



TECHNICAL FILE

Skylux[®]

LED lighting



SKYLUX[®]
Hello daylight!


General product description

De Skylux® lighting for skylights thanks to the energy-efficient EcoLED lighting. The lighting set consists of one continuous and flexible LED strip, suitable for the Skylux PVC curb 20/00 EP. It also comes with one or two transformers 230 V / 24 V DC (depending on the chosen size).

The LED strip is placed in the provided groove of the PVC curb 20/00 EP. The four included opal PC clip profiles (corners need to be cut into a mitre) click into the groove (LED dots remain slightly visible) (finished roof opening = daylight size + 4cm).

A lighting set consist of:

- 1 continuous flexible LED strip
- 4 opal polycarbonate clip profiles
- 1 (or 2) transformer(s) 230/24 V DC (depending on the length of the LED strip)

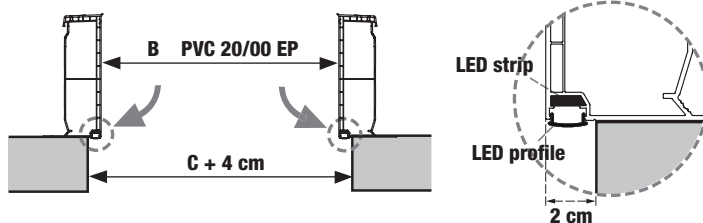

Features

- Complete lighting solution: always light, even without daylight
- Energy-efficient LED lighting

Specific characteristics

Operation	Transformer 230 V AC / 24 V DC
Colour	Pleasant light: warm white: 2900-3100 K
LED distance	120 LED dots/m
Long service life	Average of 50,000 hours
Number and types of transformers:	

Length LED strips	Number of transformers	Transformer type
< 4 m	1	30W / 24V
4 to 7 m	1	60W / 24V
> 7 m	2	

Switch	Must be provided by the customer <i>Optional:</i> Dimmable and with remote control. Also comes with an extra receiver.
--------------	---

Attestations and certificates

- CE
- The Skylux LED lighting is CE-approved in accordance with EN 55015 and EN 61547.

SKYLUX
SPINNERIJSTRAAT 100 - B-8530 STASEGEM
T +32 (0)56 20 00 00 - F +32 (0)56 21 95 99
INFO@SKYLUX.BE
WWW.SKYLUX.BE

