





TECHNICAL FILE

Skylux[®]

PVC curb 35/30



SKYLUX[®]
Hello daylight!

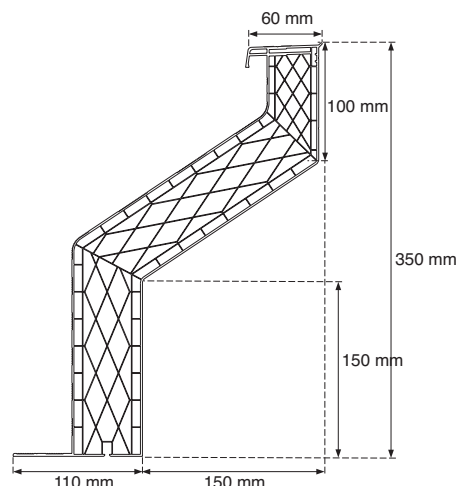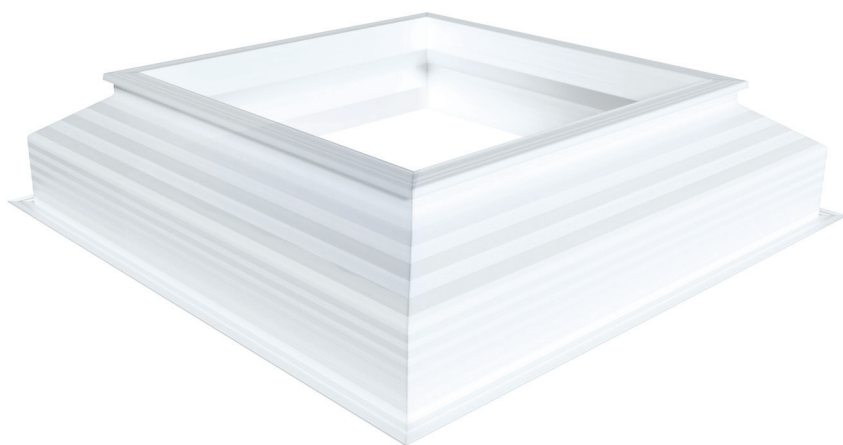

General product description

The Skylux® curbs consist of white extruded polyvinylchloride profiles of resistant frame quality. The curbs are 8-walled and are therefore superinsulating. The PVCu curb 35/30 is very adequate to refurbishment and new constructions thanks to its height of 35 cm and its shape. Different types of roofing membranes can be welded on the curbs. The inner side is smooth and doesn't need an extra treatment after placing the curb. The curb is equipped for the installation of brackets and hinges.

This curb has the CE label according to EN 1873:2014+A1:2016 in combination with a Skylux® dome.

Specific characteristics

Mechanical characteristics	PVC of type Benvic S white
Thermal characteristics	U_{up}^* value 0,86 W/m ² .K
EN 10077-2:2012	
Dimensions	Wall thickness: 60 mm
	Height: 350 mm
	Roof opening size: daylight size + (2x150) mm
Density	1500 kg/m ³

* U_{up} : U (upstand) or insulation value of the curb according to EN 1873:2014+A1:2016 determined in accordance with EN 10077-2:2012

Attestations and certificates

- CE according to EN 1873:2014+A1:2016 in combination with a Skylux® dome



EN 1873:2014+A1:2016

Fire reports

- Fire class M1
- Fire class E (EN 11.925-2)

SKYLUX IS A REGISTERED BRAND OF AG.PLASTICS
 SPINNERIJSTRAAT 100 - B-8530 STASEGEM
 T +32 (0)56 20 00 00 - F +32 (0)56 21 95 99
 INFO@SKYLUX.BE
 WWW.SKYLUX.BE

