




TECHNICAL FILE

# Skylux<sup>®</sup>

safety grid



**SKYLUX<sup>®</sup>**  
*Hello daylight!*

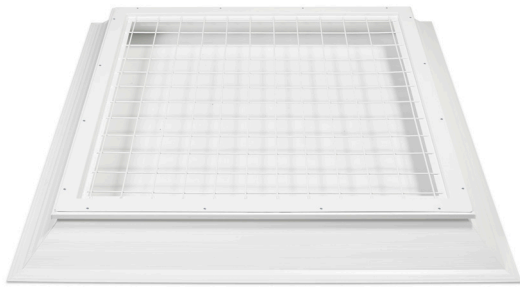

## General product description

The Skylux® safety grid prevents people from falling through the skylight. The grid is painted in white RAL 9016, on galvanised steel and can be installed in three ways: installation in the roof opening, in the curb or in the frame. Tested in accordance with GS Bau 18:2015. The corresponding test certificate is available.

Do not step or put heavy loads on the grids.

## Specific characteristics

Colour .....	White RAL 9016
Grid opening .....	100 x 100 mm

## Installation of the safety grid

- Installation is possible in the roof opening, in the curb or in the frame.

## Certificates

- Zertifikat - DGUV Test - BAU 16051 - Durchsturz-sicherung - GS BAU 18:2015



SKYLUX  
SPINNERIJSTRAAT 100 - B-8530 STASEGEM  
T +32 (0)56 20 00 00 - F +32 (0)56 21 95 99  
INFO@SKYLUX.BE  
WWW.SKYLUX.BE

