


The PSG32-90D grinder pump is effective and economical in residential and light commercial applications, utilising a stainless shredding mechanism to reduce solids found in raw sewage and enable discharge through small diameter pipework as opposed to larger diameters required for gravity-fed systems.

Quiet and trouble-free, these pumps are ideally suited for residential dwellings, shacks, marinas and pressure sewer schemes.

### Technical data

Outlet (mm)	32 BSP
Max flow rate (L/s)	3.4
Max head pressure (m)	21
Solids handling	Grinder
Power (kW)	2.0
Voltage (V)	415 (three phase)
Current (A)	4.64
Speed (RPM)	2900
Casing	Cast iron
Impeller	Cutter
Motor housing	Stainless steel
Cable details	10 m length, H07 RN-F
Weight (kg)	23

### Performance curve

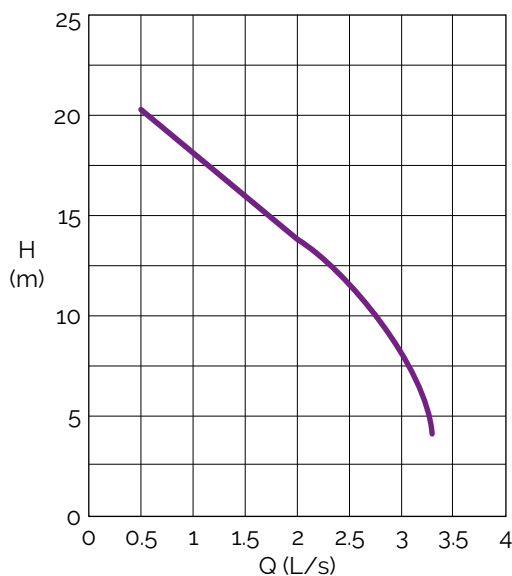

### Features

- Three-phase motor.
- Float switch available on single phase unit.
- Cast iron pump casing.
- Stainless steel motor housing.
- Quick release plug-in electric cable.
- Oil lube SiC mechanical oil seal.

### Dimensions (mm)

