

## 365-Day Annual Timer

### SA-027HQ

#### Features:


- Two N.O. or N.C. Form C relays 10A@14VDC
- Each relay can be programmed for 50 events, for a total of 100 individual programmable events
- Events can be set weekly, daily or hourly, over the course of an entire year
- Manual operation of relays without event programming
- One egress input per relay (2 total)
- Block programming allows events to be repeated
- First-person-in function interrupts the timer's normal operation
- Event outputs can be programmed disable, ON, OFF, shunt, or momentary (1~99 seconds)
- 10 Programmable holidays
- Password-protected programming
- Tandem mode allows both relays to operate simultaneously
- EEPROM Memory for data protection in case of power failure
- Built-in clock backup battery
- Built-in clock backup battery charger for external backup battery use
- Compensates for leap years
- Can be set for Standard or Daylight Saving Time
- Alphanumeric backlit LCD display for easy programming



#### Specifications:

Input Voltage	12~24 VDC/VAC	
Number of relays	2	
Relay rating	10@14VDC	
Current draw	70mA	
Number of programmable events	50 for each relay, 100 total	
Blue LED	ON	Power is ON
	OFF	Power is OFF
Number of programmable holidays	10	
Battery charging current	90mA	
Security code	4-digits, numeric, ON/OFF	
Dimensions	4 <sup>3</sup> / <sub>16</sub> "x3 <sup>1</sup> / <sub>16</sub> "x1 <sup>1</sup> / <sub>4</sub> " (107x78x31 mm)	
Weight	5.8-oz (164g)	

#### Overview:

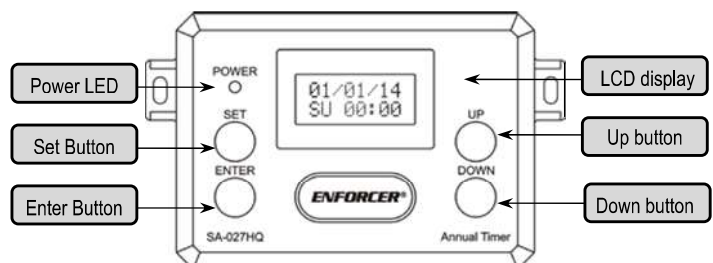

### SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: [www.seco-larm.com](http://www.seco-larm.com) Email: [sales@seco-larm.com](mailto:sales@seco-larm.com)



Copyright © 2020 SECO-LARM U.S.A., Inc. All rights reserved.  
 All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners.  
 The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

**SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI®**

PL\_SA-027HQ\_191206.docx