



User guide TaHoma / Secuyou

1. How to install the Secuyou locks in the TaHoma system


- Go to Configuration and **installation** and press **manage**

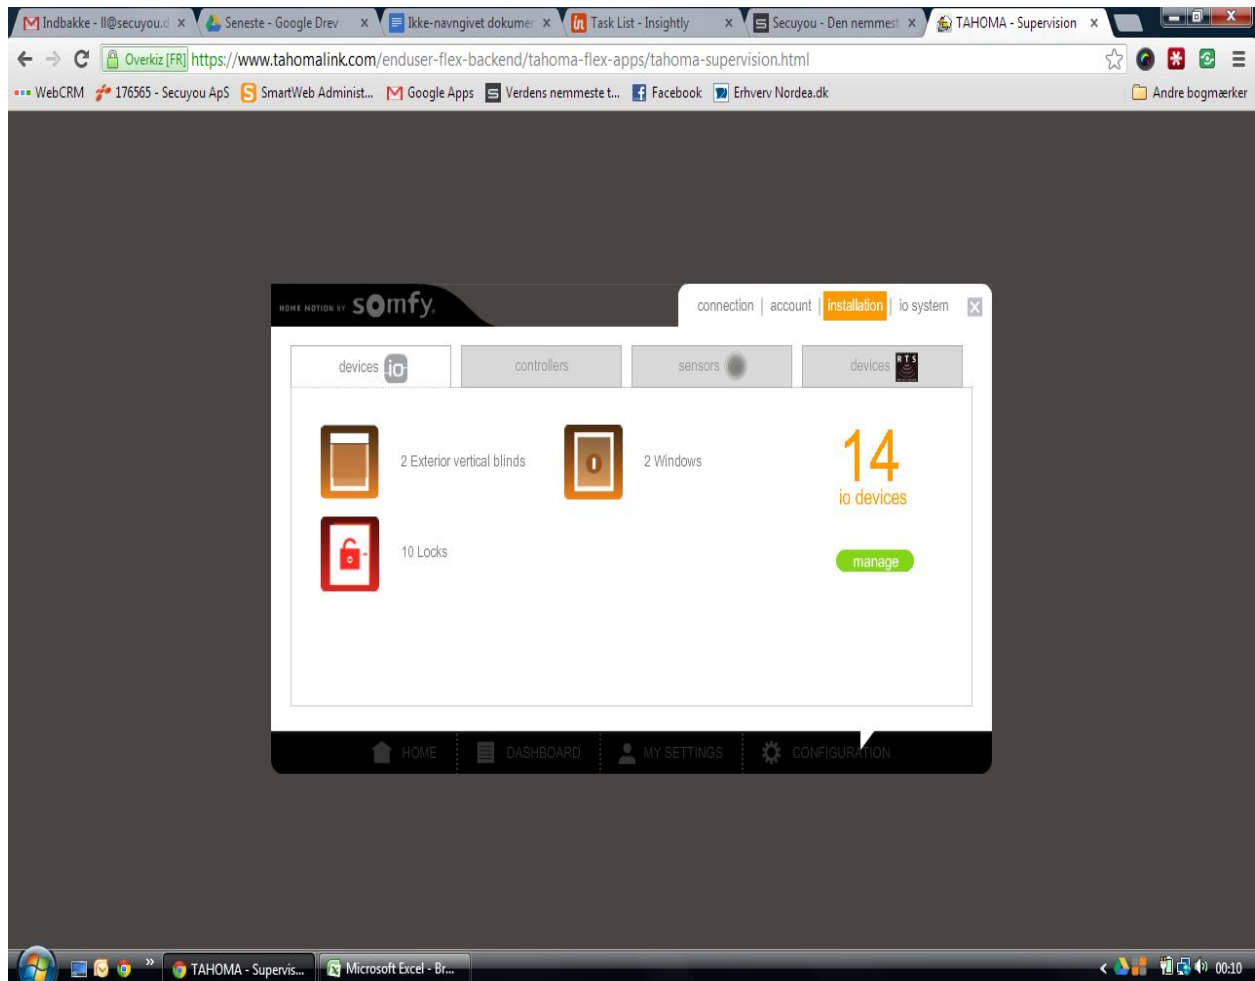

- And press **continue**

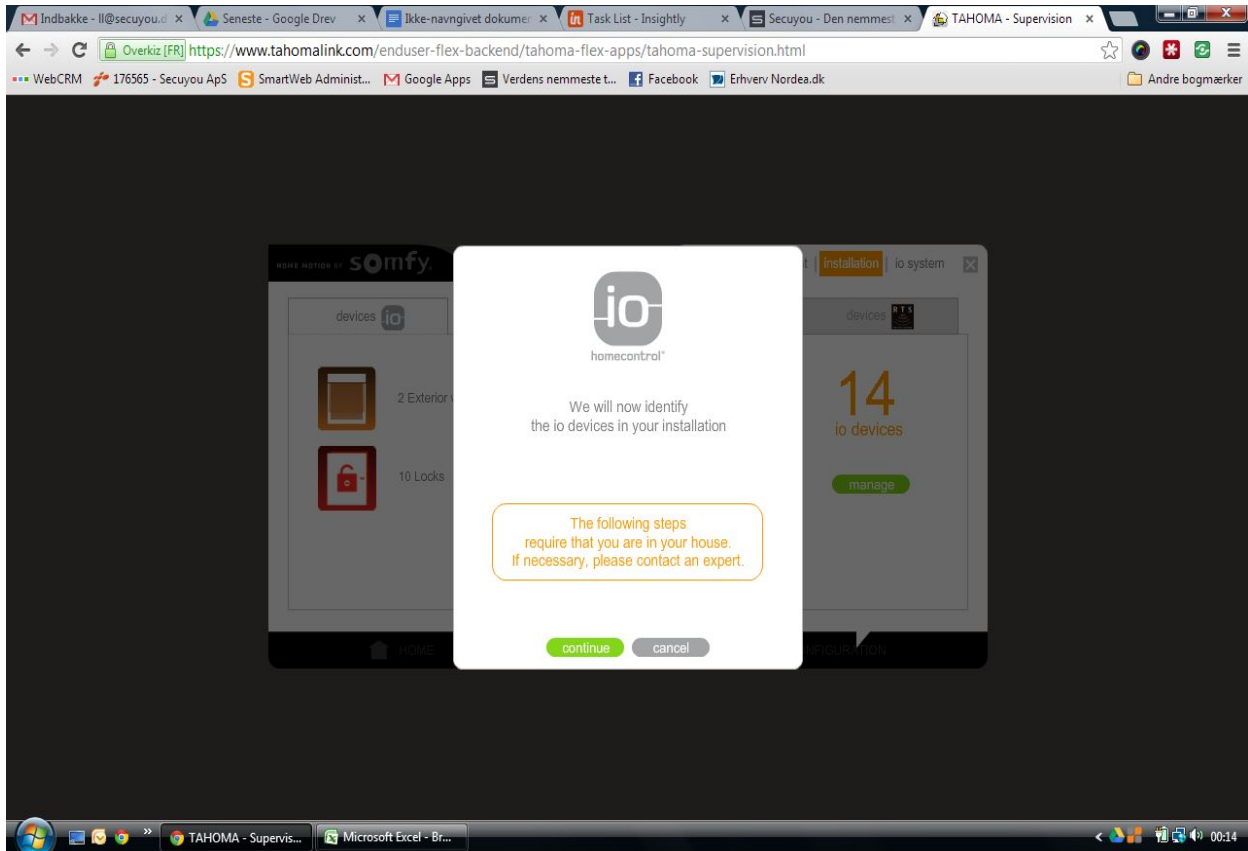


- Press  add

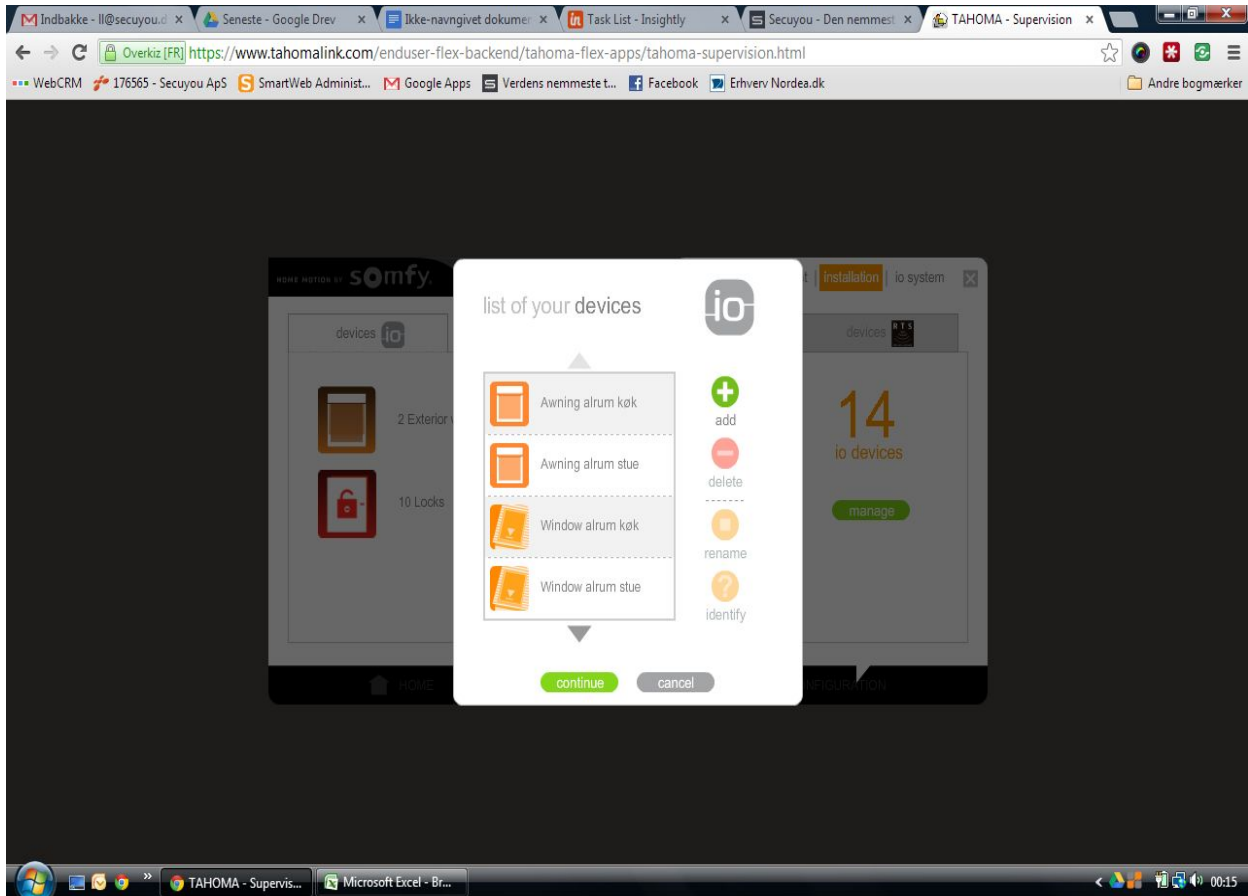


Hlgghyd 5 / Á / Á • æ / æ } Á • ð * Á @ Á ^ & ~ ^ [~ Á ^ { [c Á ^ æ ^ Á } æ ð ð * Á | | á ~ & • É [! Á ð • æ / æ } Á æ Q ~ Á • ð * Á Á ^ { [c Á [Á Á ^ c Á c] Á É


- You can see all possible remotes. If the Secuyou remote is not visible on screen, chose other control io 2W)
- Press **continue**

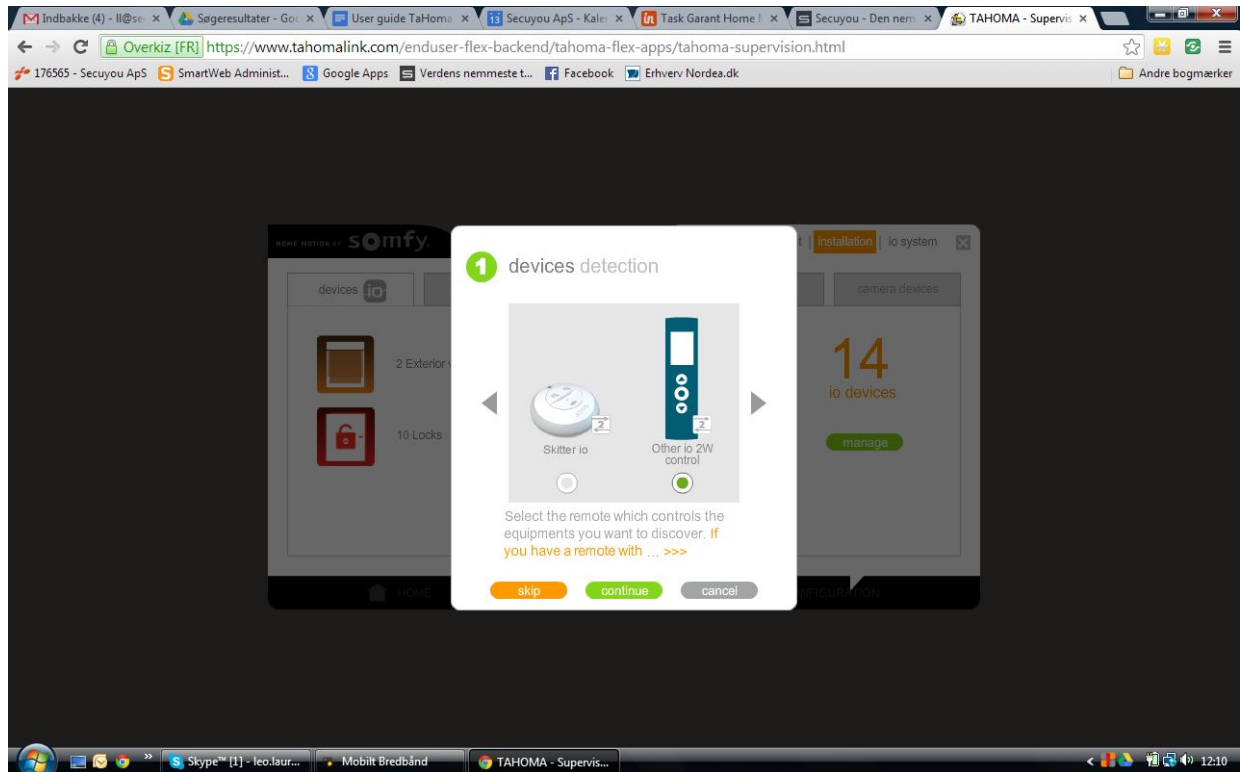

- Press PRG on the Secuyou remote, (press over 2 sec. under 5 sec. = count to 3)
- Press **OK**

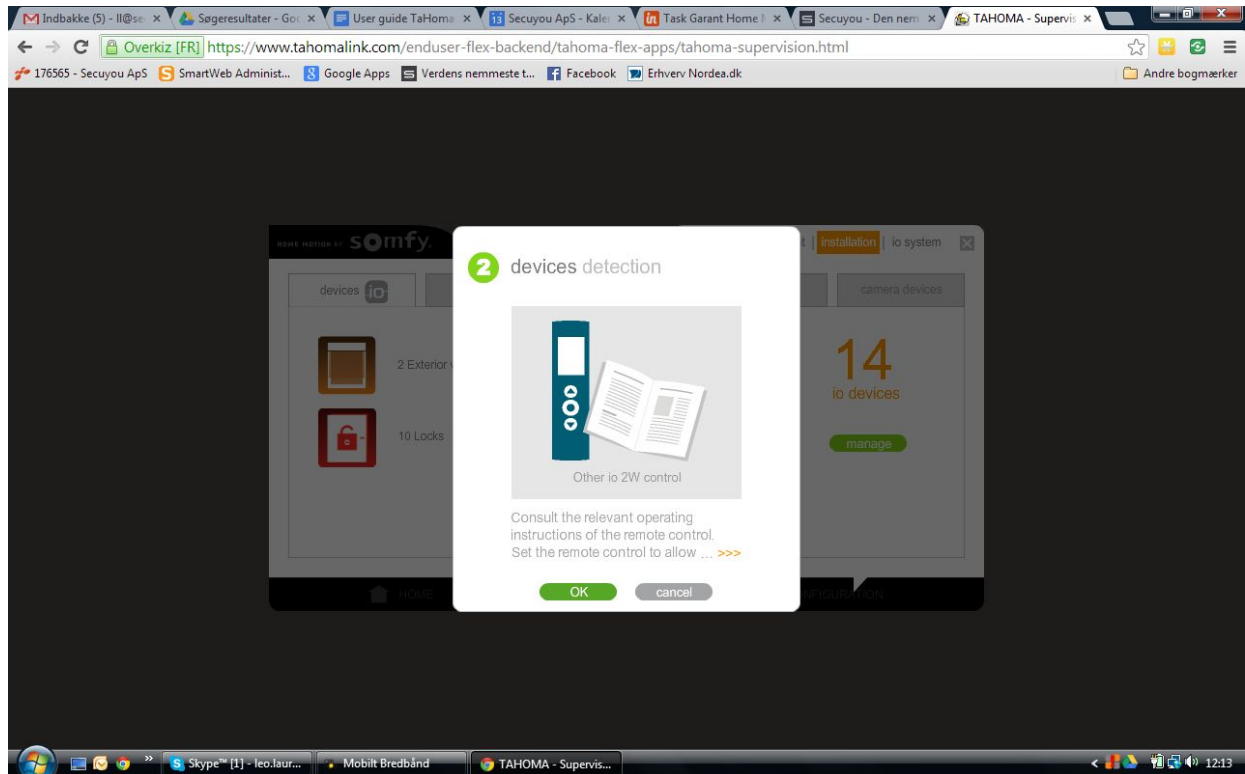

- The (House KEY / security key) is successfully installed from Secuyou remote to Tahoma.

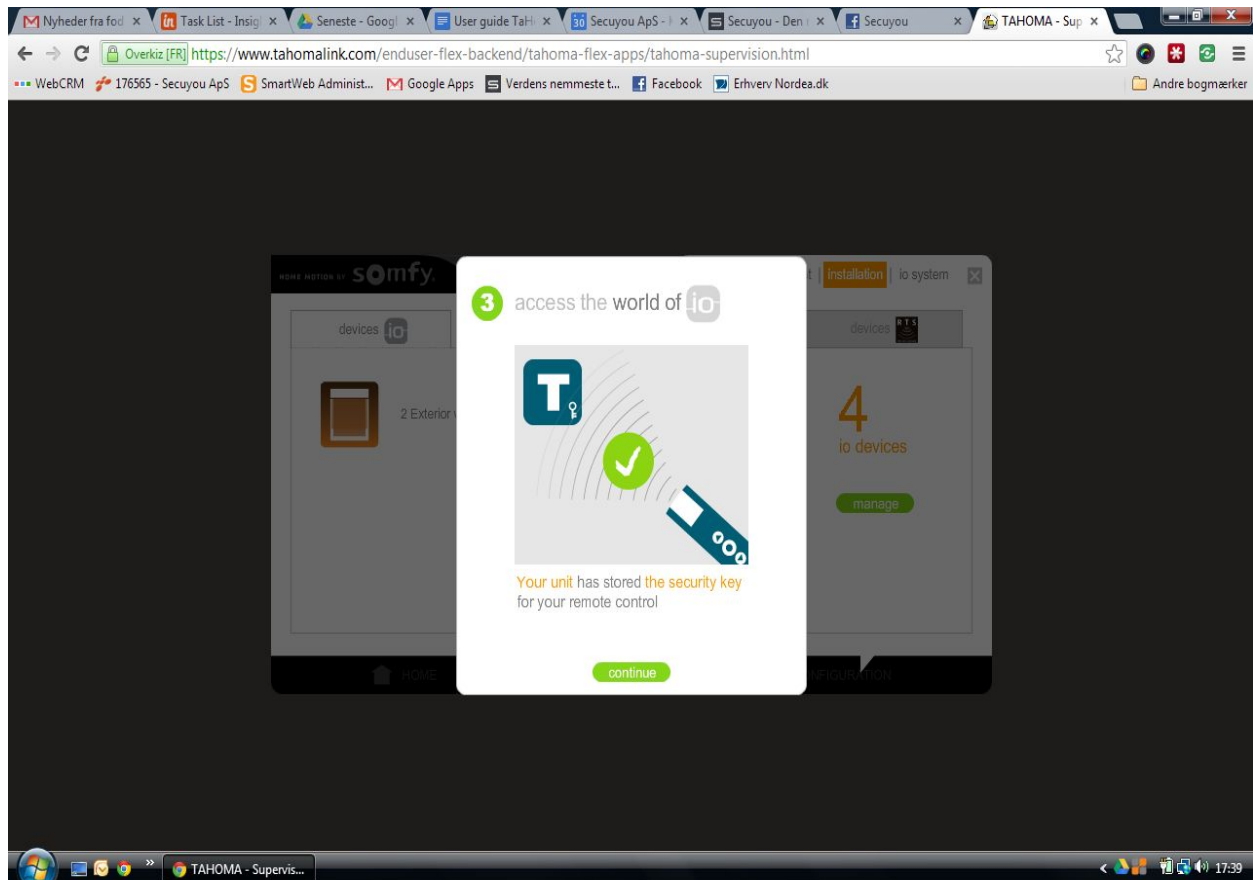


- Press **continue** and TaHoma will connect all products
- Press validate (all products contained in the Secuyou remote is installed i TaHoma)

NOTE:

If you want to add a lock after the installation. Example: Customer has 4 locks and 1 remote. The customer install the locks from the remote to Tahoma using the steps above. The customer buys extra locks and wants to control this lock from the remote and Tahoma. The customer shall use the step B beneath to add the extra locks and step C to get the extra lock into the remote.

Hjælp til installation af Secyou ApS


- Press **skip** to search for products (finds only products that has been installed in TaHoma before = reinstallation)
- To add new products (Secyou locks) that couldn't be found press PRG on locker (o. 5 sek) and press **restart**

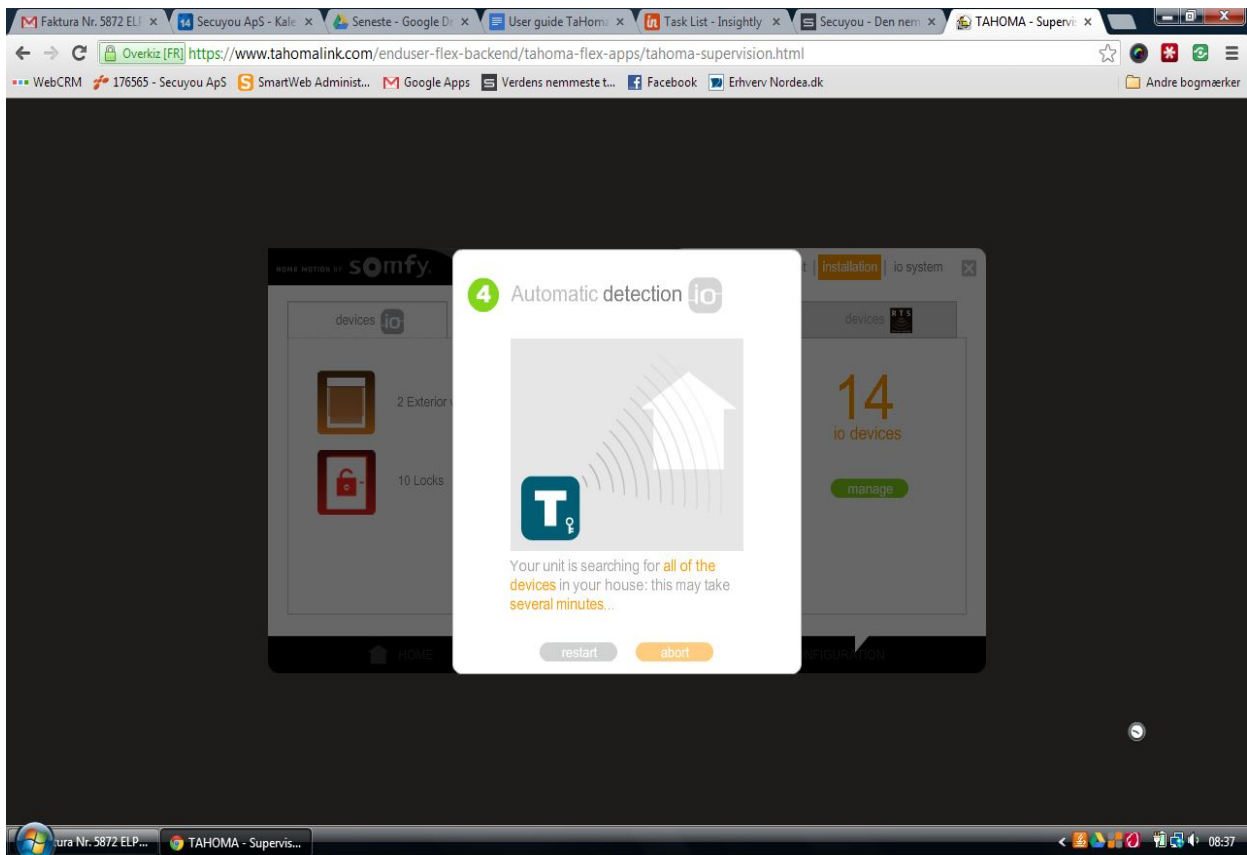


2. How to make copy from the TaHoma system to a Secuyou remote, STEP C.

Gives the opportunity for easy control (by one touch) of Secuyou locks from the Secuyou remote when leaving the house. And unlocking when coming home.


- Go to io system and press login

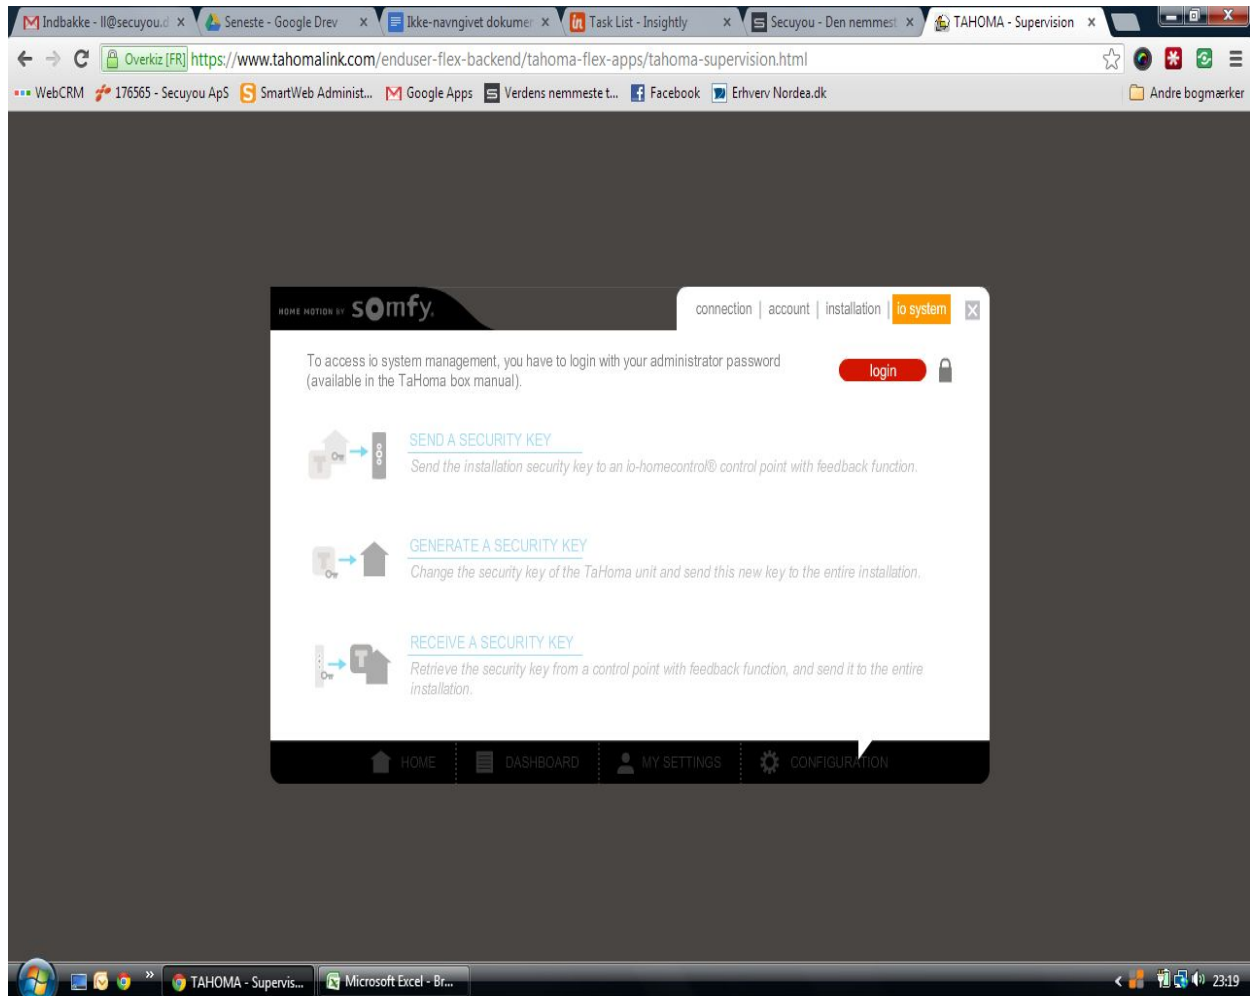


- Enter password (standard password is **instal**)

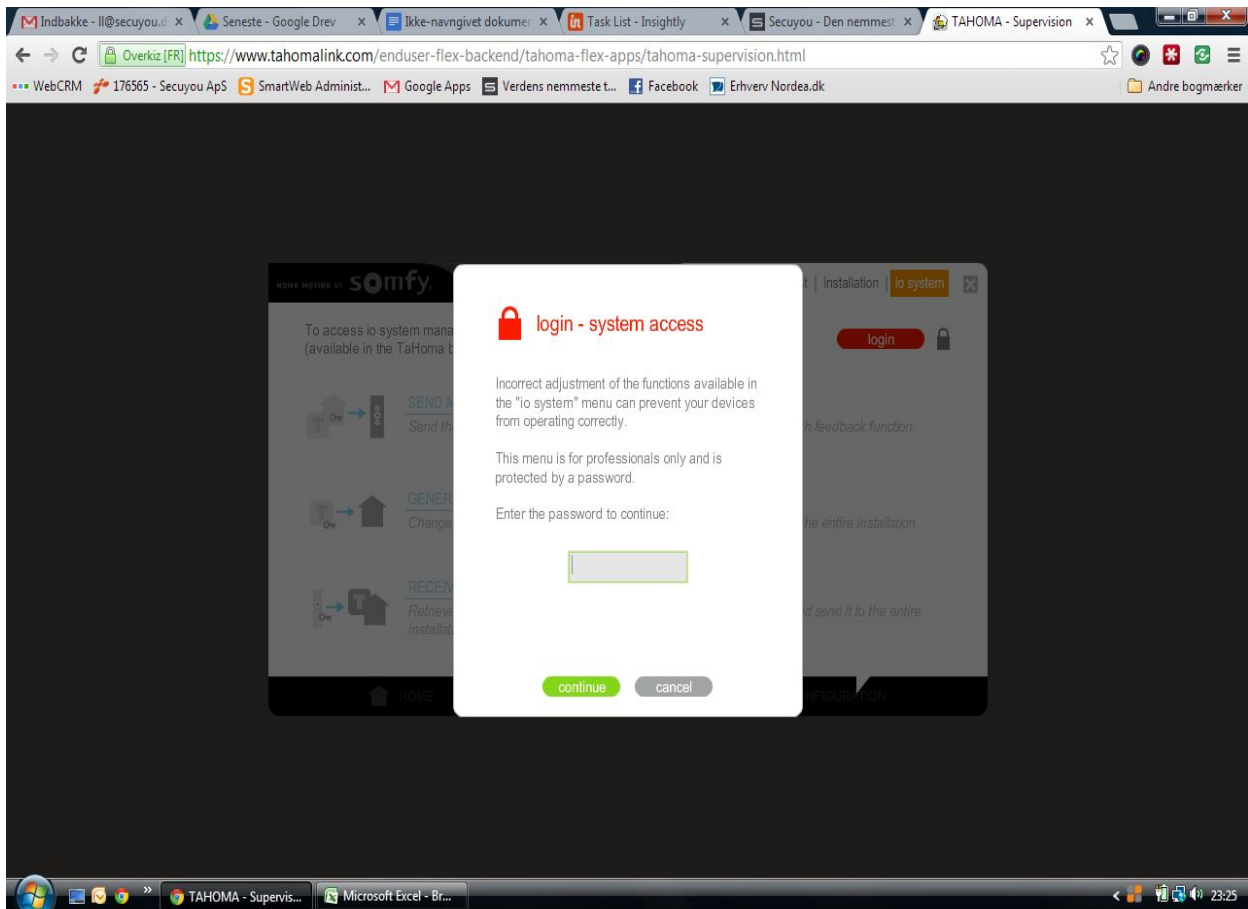


- Press send a security key

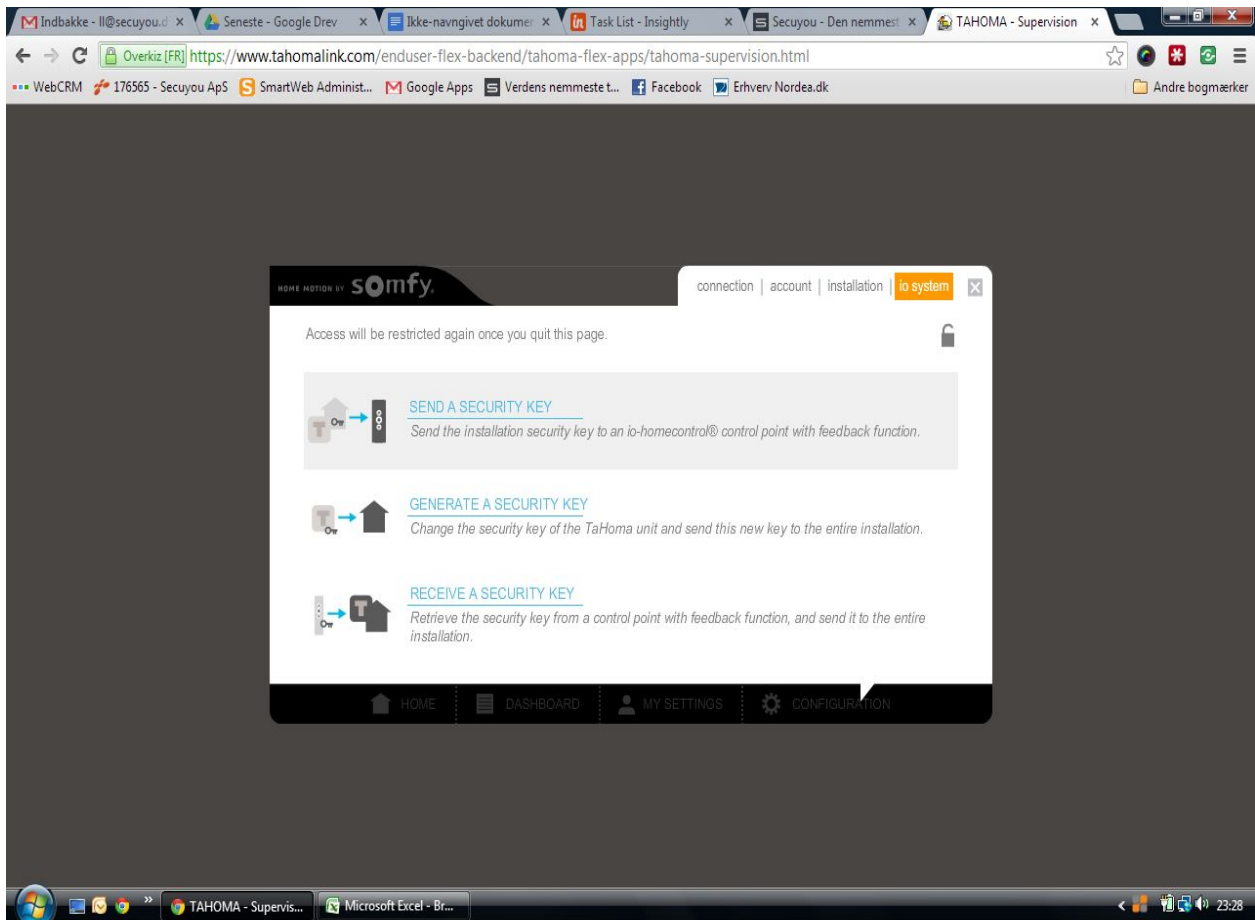


- Press **yes**

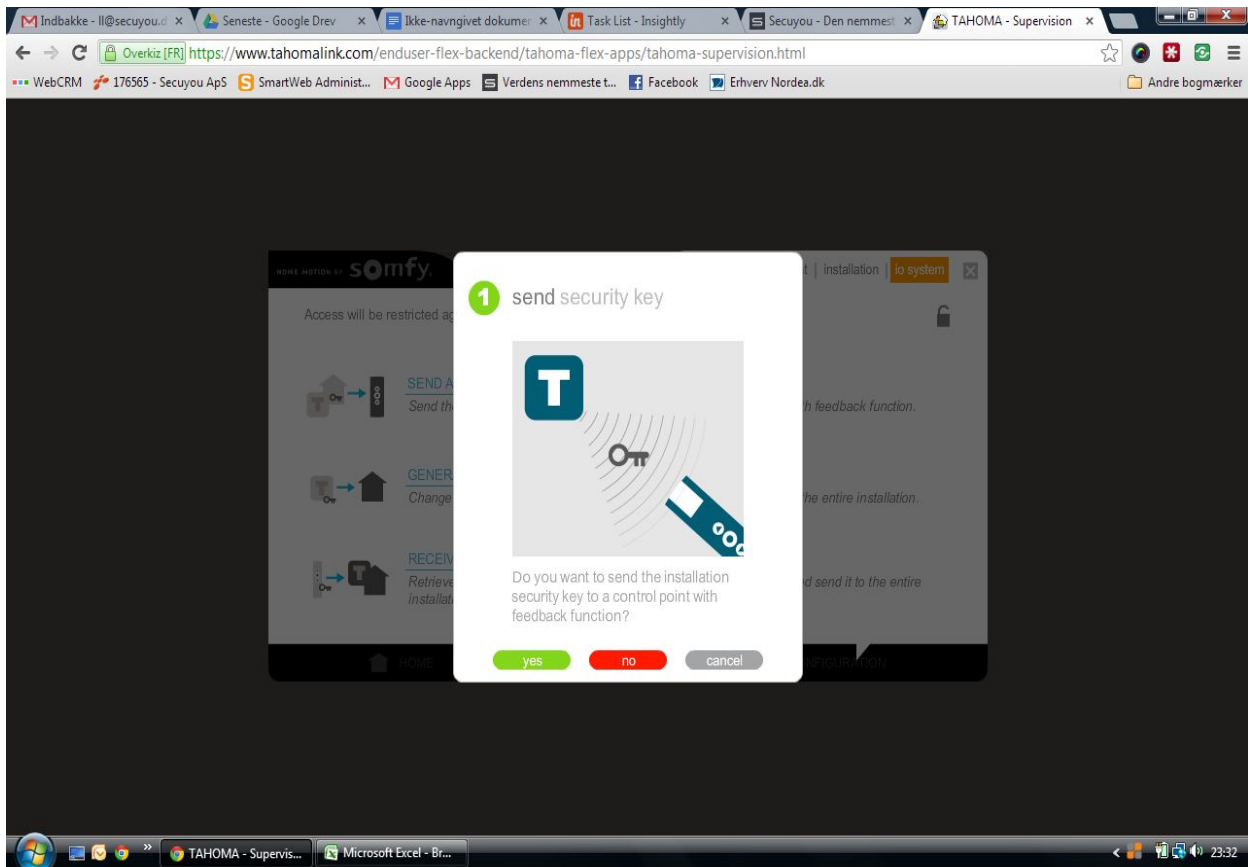

- Select other 2W control and press **OK**

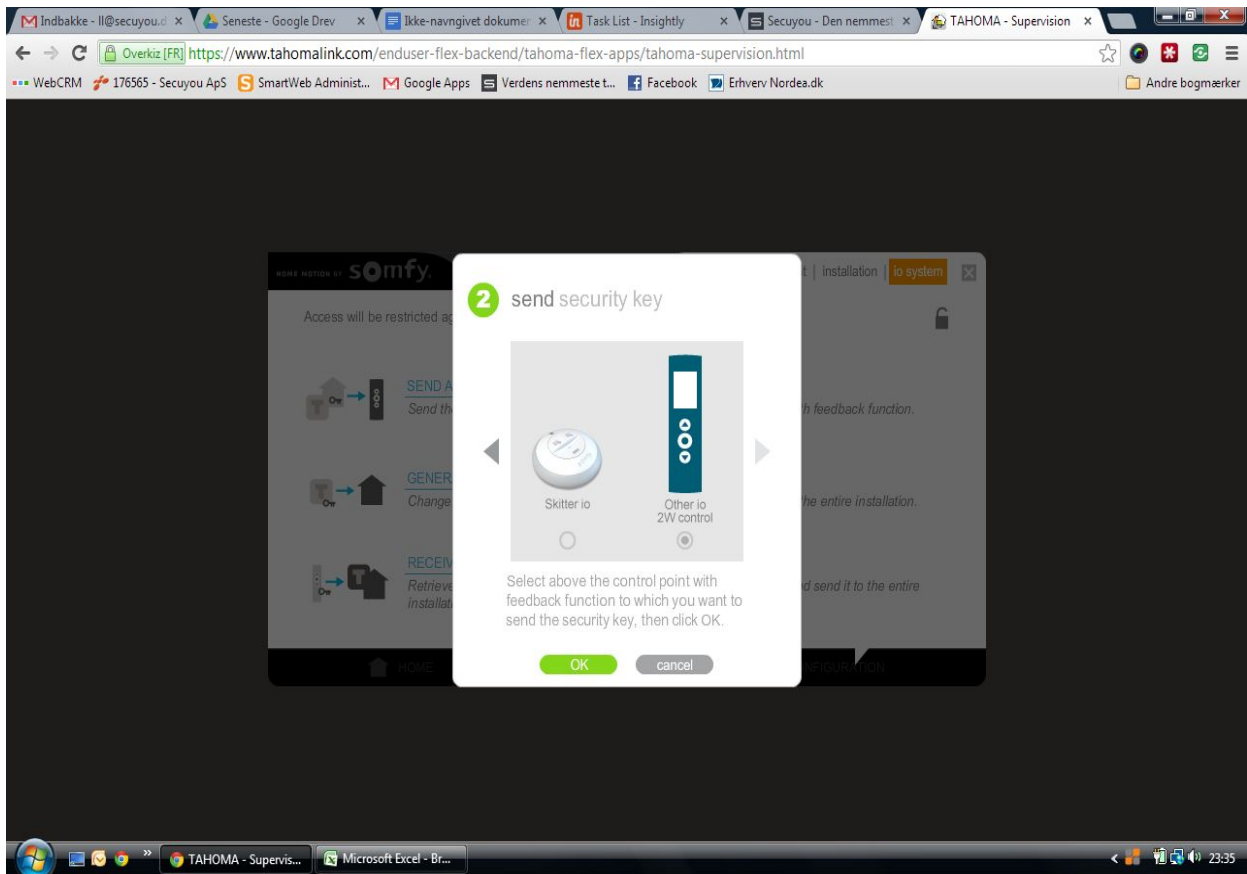

- Press short PRG (u. 2 sec) on the Secuyou remote

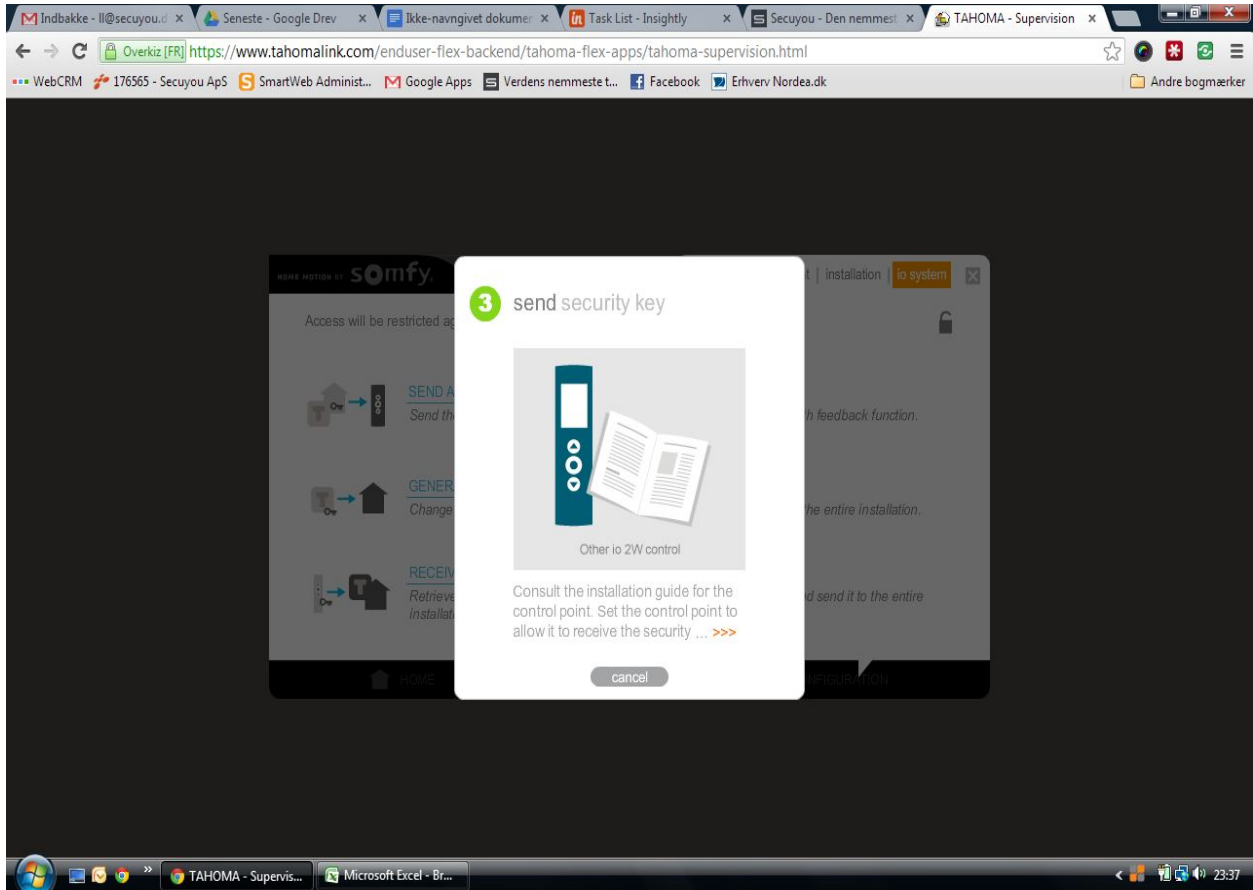

- when the key is copied you will get 2 green LEDs on the remote

