


# KAIA

## LIA

'Cutting through darkness'

Designed by KAIA


LIA's two-flamed elegance captivates when on, yet this wall light almost disappears into its surrounding when the lights are off.

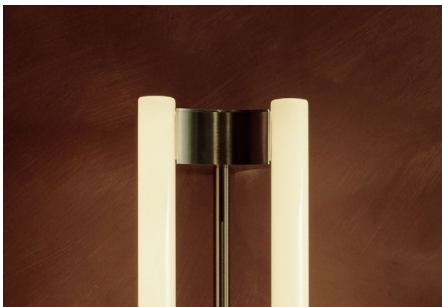

Process: The brass is cut, bent in its shape and polished. Then all the components are nickel plated or the brass is brushed and painted with a clear lacquer to maintain the natural effect of the brass. Lastly all parts are assembled to the LIA lighting object.

## LIA

Wall Sconce  
100

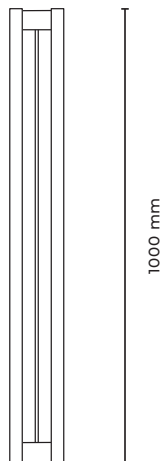

Type	Wall light
Material	Brass
Environment	Indoors
Dimension	1000 x 125 mm - 39.37 x 4.92 "
Weight	2.1 kg - 4.63 lb
Certification	IP20 CE; ETL US/CSA Canada
EU/UK - US	230 V - 110 V
Lamps	max. 2x 120 W, S14s, our suggestion: 2 x linear opal LED, 2700 K, 1055 lm, Mains ( Phase) dimmable, EPREL-ID: 566195;
Lamps US	2x Linear opal LED S14s,13W, 2700K, 1150 lm, Mains dimmable (leading edge)
Standard finishes:	
050 12 101	polished nickel
050 12 201	brushed nickel
050 12 202	brushed brass
050 12 209	black matte


On very rare occasions, these lamps may appear to have a slight buzzing or flickering. As is the case with all retro LED lamps, this is likely caused by a number of outside influences such as incorrect installation, wiring, dimming or transformers and in some instances low electrical resistance.

Please contact [sales@kaialighting.com](mailto:sales@kaialighting.com) for further information on dimmers etc. Please note KAIA Ltd cannot take any responsibility for the connection with your dimming or central control system. It is the customer's responsibility to ensure the compatibility with their systems.

Please ask your electrician & lighting designer for further advice.

**LIA**

Wall Sconce  
50



Type  
Material  
Environment  
Dimension  
Weight  
Certification  
EU/UK - US  
Lamps

Lamps US

Wall light  
Brass  
Indoors  
500 x 125 mm - 19.69 x 4.92 "  
1.9 kg - 4.63 lb  
IP20 CE; ETL US/CSA Canada  
230 V - 110 V  
max. 2x 60 W, S14s, our suggestion: 2x linear opal LED, 2700 K, 470 lm, Mains (Phase) dimmable, EPREL-ID: 566200;  
2x Linear opal LED S14s\*,7W, 2700K, 610 lm, Mains dimmable (leading edge)


Standard finishes:

050 13 101  
050 13 201  
050 13 202  
050 13 209

polished nickel  
brushed nickel  
brushed brass  
black matte

**LIA**

Wall Sconce  
30



Type  
Material  
Environment  
Dimension  
Weight  
Certification  
EU/UK - US  
Lamps

Lamps US

Wall light  
Brass  
Indoors  
300 x 125 mm - 11.81 x 4.92 "  
1.8 kg - 4.63 lb  
IP20 CE; ETL US/CSA Canada  
230 V - 110 V  
max. 2x 35 W, S14s, our suggestion: 2x linear opal LED, 2700 K, 275 lm, Mains (Phase) dimmable, EPREL ID 566198;  
Glass lamps not available.  
Please inquire.

Standard finishes:

050 14 101  
050 14 201  
050 14 202  
050 14 209

polished nickel  
brushed nickel  
brushed brass  
black matte

On very rare occasions, these lamps may appear to have a slight buzzing or flickering. As is the case with all retro LED lamps, this is likely caused by a number of outside influences such as incorrect installation, wiring, dimming or transformers and in some instances low electrical resistance.

Please contact [sales@kaialighting.com](mailto:sales@kaialighting.com) for further information on dimmers etc. Please note KAIA Ltd cannot take any responsibility for the connection with your dimming or central control system. It is the customer's responsibility to ensure the compatibility with their systems.

Please ask your electrician & lighting designer for further advice.