




EPDM rubber core with PTFE film for chemicals and food products.

Ideal for plastic pipes and other applications where a large tightening force cannot be applied.

- temperatures up to 150 °C
- pressures up to 20 bar
- to suit ANSI 150 flanges
- sizes 1-inch to 6-inch ex-stock

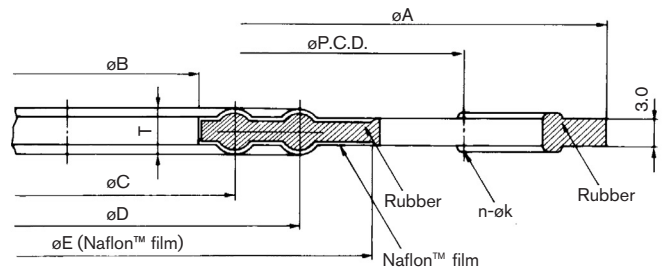

Nominal flange diameter		Gasket			Diameter of sealing part		Bolt		Reference E
A	B	O.D. A	O.D. B	Thickness T	C	D	PCD	n=øk	
15	1/2	85	18	5	30	—	60.3	4-16	42
20	3/4	95	22	5	32	44	69.9	4-16	52
25	1	103	29	5	38	50	79.4	4-16	60
(32)	(1 1/4)	111	39	5	47	59	88.9	4-16	70
40	1 1/2	121	44	5	53	68	98.4	4-16	79
50	2	146	55	5	65	83	120.7	4-19	99
65	2 1/2	173	70	5	81	101	139.7	4-19	118
80	3	186	81	5	94	112	152.4	4-19	130
(90)	(3 1/2)	210	91	5	110	134	177.8	8-19	168
100	4	223	103	5	124	148	190.5	8-19	168
(125)	(5)	249	128	5	150	174	215.9	8-22	190
150	6	274	152	5	172	196	241.3	8-22	212
200	8	337	200	5	222	246	298.5	8-22	270
250	10	401	251	6	276	300	362.0	12-25	330
300	12	477	302	6	335	365	431.8	17-25	400