




Tech Data Sheet

Features

- Pumps come close coupled to standard 150W, 415 Volt motor.
- Non-Metallic wetted parts: Polypropylene casing with Viton front casing O-ring. (option: EPDM O-ring)
- Liquid Temperatures up to 60°C.
- 25mm suction & 25mm discharge ports for hose tail or 1" suction & 1" discharge for BSP threaded

Model	200PS-3 (L)	200PS-3 (M)	200PS-3 (H)
Impeller size (mm)	80	74	70
Liquid SG	1.1	1.3	1.5
Speed (rpm)	2900	2900	2900

Performance Curves

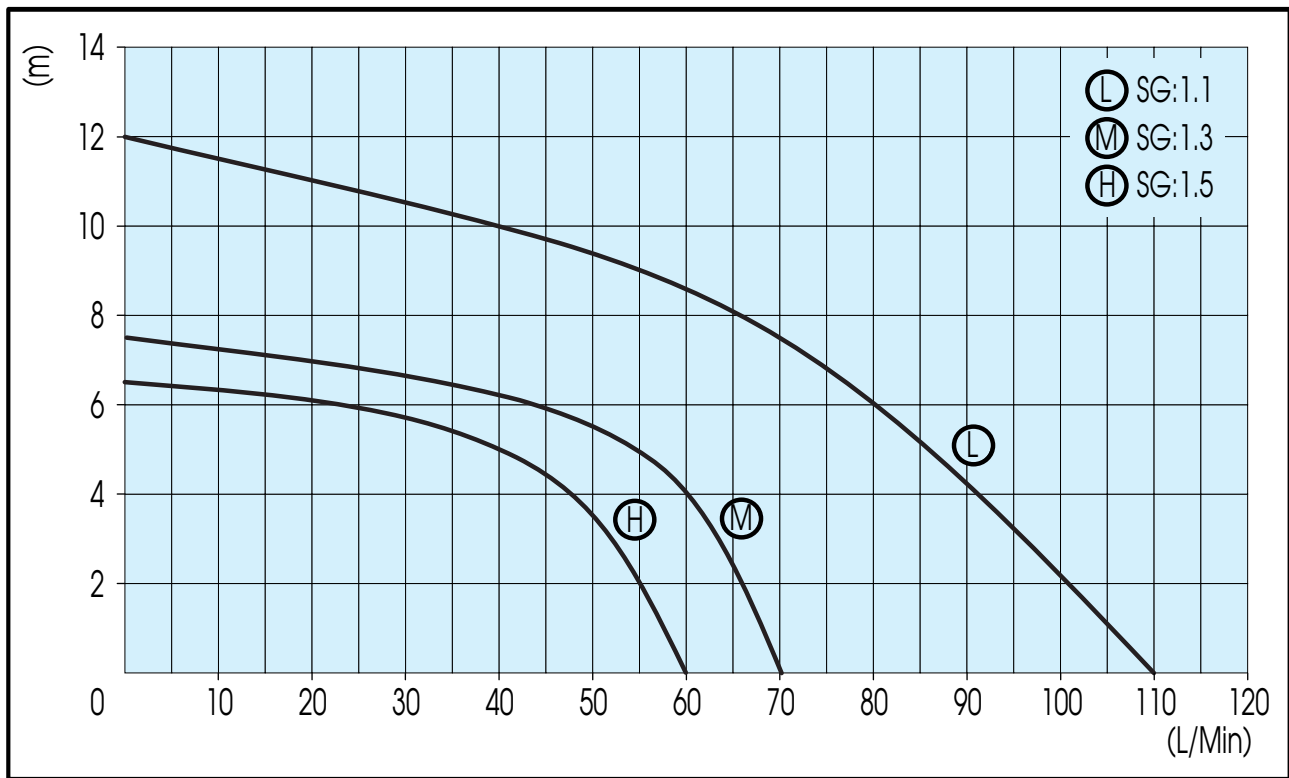

Dimensions

