



Email: info@ismoka.com
Web: www.eleafworld.com



MADE IN CHINA
Manufactured by Eleaf



Lemo 3 Atomizer User Manual

Notice for Use


Thank you for choosing Eleaf products! Please read this manual carefully before use so as to use correctly. If you require additional information or have questions about the product or its use, please consult your local agents, or visit our website at www.eleafworld.com.

Product Introduction


Lemo 3, an innovatively designed atomizer, can either be used with replaceable atomizer head or used with pre-made or self-built coil as RTA for DIY fun. The e-juice can easily be refilled from the top by removing the top cap only. Also all parts of Lemo 3 can be detached and reassembled, allowing convenience in cleaning and maintenance.

How to Use?

A. When used with pre-made or self-built coil as RTA:

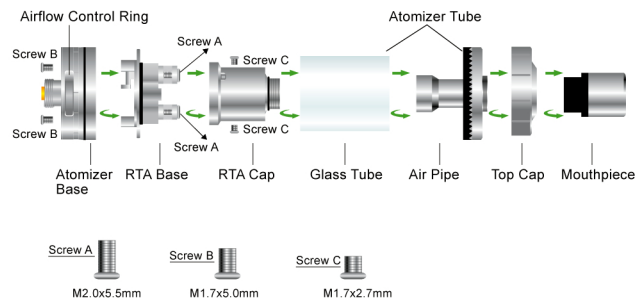


1. Screw off the atomizer base, loosen the two screws on the RTA cap and take the RTA cap off.
2. Fix the pre-made or self-built coil on the RTA base, activate the coil with your device till it goes red, and then put the cotton through the coil after the coil cools down. (Note: please make sure the finally fixed coil does not come into contact with the surface of the deck and the inner wall of the RTA cap.)
3. Drip a few drops of e-liquid directly into the pre-made or self-built coil to make it fully saturated before use, put the RTA cap on and tighten the screws, and then screw the atomizer tube onto the atomizer base tightly.
4. Screw off the top cap from the atomizer, slowly fill e-liquid into the atomizer along the glass tube and screw the top cap on tightly after filling. (Note: please don't overfill and don't fill e-liquid into the air pipe; please take several puffs without activating the atomizer and leave the atomizer sit for several minutes before use.)



5. The airflow can be adjusted by rotating the airflow control ring on the atomizer base.
6. Finally the Lemo 3 as RTA is ready for use.

B. When used with atomizer head as ordinary atomizer:

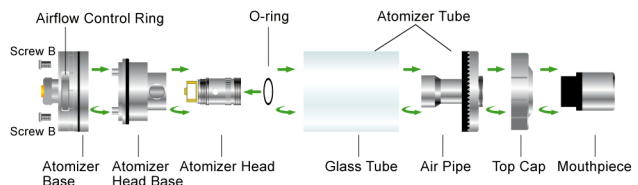

1. Take off the RTA base from the atomizer base, and fix the atomizer head base on with screws tightened.
2. Drip a few drops of e-liquid directly into the atomizer head to make it fully saturated before use, screw the atomizer head onto the atomizer head base tightly, and screw the atomizer tube on.
3. Screw off the top cap from the atomizer, slowly fill e-liquid into the atomizer along the glass tube and screw the top cap on tightly after filling. (Note: please don't overfill and don't fill e-liquid into the air pipe; please take several puffs without activating the atomizer and leave the atomizer sit for several minutes before use.)



4. The airflow can be adjusted by rotating the airflow control ring on the atomizer base.
5. Finally the Lemo 3 atomizer is ready for use.

Precautions

1. Only have your Lemo 3 atomizer repaired by Eleaf. Do not attempt to repair the unit by yourself as damage or personal injury may occur.
2. Do not leave the Lemo 3 atomizer in high temperatures or damp conditions, otherwise it may be damaged. The appropriate operation temperature is from -10°C to 60°C while using.
3. Do not attempt to combine the Lemo 3 atomizer with parts from other brands of e-cigarettes. If it is damaged in this way, our company will not take on responsibility and your warranty will be void.

Warnings

1. Please keep out of reach of children.
2. This is not recommended for use by young people or non-smokers.

Warranty

We are not responsible for any damages caused by human error. Legal warranty is applied.