



GE
Lighting

27216 - GE HIR™ PAR38

80PAR/HIR/SP10

- ☞ Up to 42% more efficient than standard halogen
- ☞ Up to 27% energy savings
- ☞ Up to 60% longer life -4000 hours

Product Photo



GENERAL CHARACTERISTICS

| | |
|--------------------------|------------------------------|
| Base Description | Medium Skirt |
| Base Type | Screw-In |
| Filament | CC-8 |
| Rated Life Hours-nominal | 3000 h |
| Primary Application | Indoor and Outdoor Spotlight |
| Product Technology | Halogen |
| Base | E26/50x39 |
| Bulb Shape | PAR38 |

PHOTOMETRIC CHARACTERISTICS

| | |
|--------------------------------|----------|
| Beam Spread | 10 deg |
| Center Beam Candle Pwr Candela | 22000 cd |
| Nominal Initial Lumen per Watt | 19 |
| Initial Lumens-nominal | 1500 lm |
| Color Temperature | 2900 K |

PRODUCT INFORMATION

| | |
|----------------------------------|----------------|
| Product Code | 27216 |
| Description | 80PAR/HIR/SP10 |
| Alternative Unit Of Measure | EACH |
| Standard Package Quantity | 12 |
| Ean UPC | 043168272162 |
| Standard Package GTIN | 00043168272162 |
| No Of Items Per Sales Unit | 1 |
| No Of Items Per Standard Package | 12 |
| Sales Unit | Each |
| UCC | 043168272162 |
| Alternative Unit Of Measure | CASE |
| Standard Package Quantity | |
| Ean UPC | 043168272162 |
| Standard Package GTIN | 10043168272169 |
| No Of Items Per Sales Unit | |
| No Of Items Per Standard Package | |
| Sales Unit | Case |
| UCC | 043168272162 |

DIMENSIONS

| | |
|----------|---------|
| Diameter | 4.75 in |
|----------|---------|

ELECTRICAL CHARACTERISTICS

| | |
|---------------------|-------|
| Input Voltage [nom] | 120 V |
| Rated power (Watts) | 80 W |

CAUTIONS & WARNINGS

Caution

- Lamp may shatter and cause injury if broken
- Do not use lamp if outer glass is scratched or broken.

Warning

- Pressurized lamp--unexpected rupture may cause injury, fire, or property damage
- Do not use lamp if outer glass is scratched or broken.

Risk of Burn


- Allow lamp to cool before handling.

Risk of Fire

- Keep combustible materials away from lamp.

Risk of Electric Shock

- Turn power off before inspection
- installation or removal.

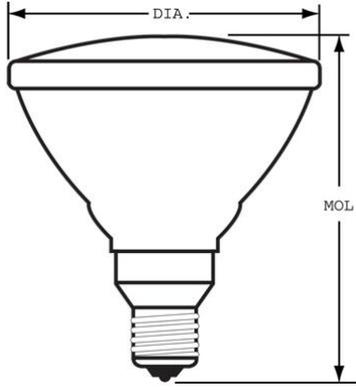

Jul 27, 2017 7:41:32 PM For additional information, visit www.gelighting.com