




MULTI-FUNCTIONAL POWER BANK

WALL CHARGER & POWER BANK

USER MANUAL

Please read these instructions carefully before using your product.

Product overview



Function description:

- ① Wireless Charging LED red; Standby LED green
- ② Type-C Input: 5V=3A; Output: 5V=2.4A
- ③ USB Output: 5V=2.4A
- ④ USB Output: 5V=2.4A
- ⑤ Battery indicator
- ⑥ Power switch
Short press to on power
Long press to turn off power
- ⑦ 5W Wireless Charging Transmitter
- ⑧ AC Input; chargeable plug or use extension cord



Specifications:

- Capacity: 6700 mAh polymer battery (24.79 Wh)
- Input: AC 90-240V 50/60Hz, 0.5A, 5V/3A (15W)
- Input: USB-C 5V/3A
- Output: USB-C 5V/2.4A
- Output: 2 x USB 5V/2.4A
- Output: Wireless 5W
- Charge time: ~2 hours
- Size: 80 x 80 x 29 mm
- Weight: 240g

Operation:

1. Turn on/off

Light press the power switch to turn on the power bank and wireless charging function.

The output is automatically turned off after 30 seconds.

2. Charging the Power Bank

Plug into wall outlet.

After fully charged, LCD indicates "100".

3. Wireless Charging (for Qi compatible devices)

Turn on the power switch, put your phone on the centre of wireless charging mark.

Long press the power switch for three seconds to turn off power when not using the wireless charging.

Attention

1. Please charge fully before first use;
2. Make sure to use correct USB cable when charging;
3. Before charging the device, please confirm whether the input voltage of the device is consistent with the output voltage of the mobile power supply;
4. Do not put the product in a damp place or soak the product with water;
5. Do not expose the product to the sun or put it at a flammable or explosive place;
6. Please place the product out of reach of children.




Package Contents:


Wall Charger & Power Bank x 1
AU/NZ Plug Adapter
User Manual x 1

Note: plug adapters for other countries can be purchased at www.powerpod.net


Charge the power bank:



Use the plug to charge it



Use an extension cord to charge it

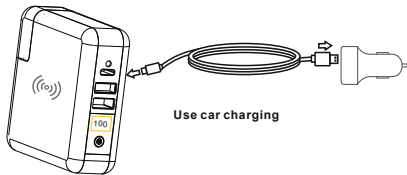

Use car charging

Protective Function:

- Output with constant voltage, over-voltage protection.
- Output with current-limiting, over-current protection. Release the over-current protection, output will recover automatically.
- Output short circuit protection. Short-circuit USB output interface will stop output and protect the product. If the short-circuit is released, output will recover automatically.
- Built-in battery protection. Double protective functions for built-in battery.

Warning:

- Ignoring safety instructions may lead to fire, electric shock, or damage to the digital device.
- Do not drop, disassemble, squeeze or expose to high temperature or to water.
- Please stop using it immediately if power bank or digital device swells or becomes deformed.
- Please keep away from children.
- Please dispose of product carefully.

Attention:

- Before charging digital devices, please make sure that the cable and connector are correctly connected. We recommend using the device's cable or a Powerpod cable to avoid damaging the digital device.

Storage and Maintenance:

If you do not use the portable battery pack for a long period, please follow the instructions below every 12 months to maintain its normal functions:

First, fully charge the portable battery pack, then discharge the power by an outer device. Finally, recharge it to half capacity, and store in a cool and dry place.

It is recommended to do a complete charging and discharging every 3 months to ensure the best status of the battery cells inside.

Support:

Please email support@powerpod.net