


ZOOZ™
bright ideas

MOMENTARY SWITCH
ZAC99

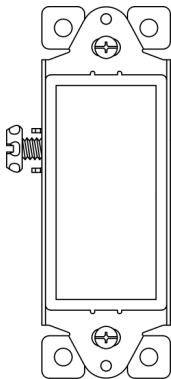

FEATURES

- ▶ Push-button control for selected Z-Wave dimmer modules or garbage disposals
- ▶ Works with loads up to 15A
- ▶ Accepts 14AWG and 12AWG wires
- ▶ Slim design for extra room in the switch box
- ▶ Clean decora style

SPECIFICATIONS

- ▶ Model Number: ZAC99
- ▶ Type: Momentary contact
- ▶ Power: 120 VAC, 60 Hz
- ▶ Maximum Load: 15A
- ▶ Operating Temperature: 32-104° F (0-40° C)
- ▶ Installation and Use: Indoor only
- ▶ Dimensions: 4" x 1.5" x 1.4"

! CAUTION

This is an electrical device - please use caution when installing and operating the momentary switch.

This is an accessory switch which is meant to be used with external relays and approved electrical devices such as a garbage disposal. The switch is on only when the upper paddle is pressed and held down.

This is NOT a Z-Wave device. You will need a Z-Wave behind-the-switch dimmer module (sold separately) to remotely control lighting in your smart home.

INSTALLATION

1. Make sure power is OFF in the switch box

2. Strip wire insulation if needed (expose to 0.75")
3. Connect all wires to screw terminals, including ground
4. Verify that you are dealing with **12 or 14 AWG copper wire** as this is the only approved type of wiring for this installation.
5. Tighten all screws
6. Secure your Z-Wave switch in the box with mounting screws, handling the wires with care.
7. Install the wall plate
8. Turn the power back on and test the device.

! WARNING

- ▶ This product should be installed indoors upon completion of any building renovations

- ▶ Prior to installation, the device should be stored in a dry, dust-and-mold-proof place
- ▶ Do not install the switch in a place with direct sun exposure, high temperature or humidity
- ▶ Keep away from chemicals, water, and dust
- ▶ Ensure the device is never close to any heat source or open flame to prevent fire
- ▶ Ensure the device is connected to an electric power source that does not exceed the maximum load power
- ▶ No part of the device may be replaced or repaired by the user

UL CERTIFIED

This is an UL certified device. UL, just like ETL, is a Nationally Recognized

Testing Laboratory. The UL mark is proof of product compliance to North American safety standards.

All brand names displayed are trademarks of their respective holders.

© Zooz 2017

ask@getzooz.com
www.getzooz.com

NOT SURE HOW
TO WIRE THIS
SWITCH?

JUST EMAIL US!

ask@getzooz.com