




# METALICON

Dynamic. Expressive. Enduring.

## Installation Instructions

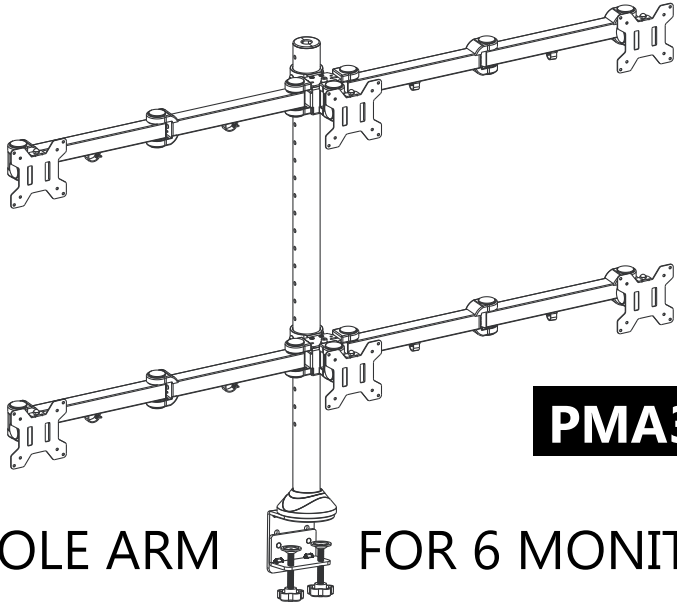


### UNPACKING INSTRUCTIONS

- Carefully open the carton, remove contents and lay out on cardboard or other protective surface to avoid damage.
- Check package contents against the Parts List on the next page to assure that all components were received undamaged. Do not use damaged or defective parts.
- Carefully read all instructions before attempting installation.


### IMPORTANT SAFETY INFORMATION

- Install and operate this device with care. Please read these instructions before installation, and carefully follow all instructions contained herein. Use proper safety equipment during installation.
- Please call a qualified installation contractor for help if you don't understand these directions or have any doubts about the safety of the installation.
- Do not use this product for any purpose or in any configuration not explicitly specified in these instructions. We hereby disclaim all liability for injury or damage arising from incorrect assembly, incorrect mounting, or incorrect use of this product.


## Parts List



(1) Pole-a



(2) Monitor Arm-b




(6) VESA Plate-c



(6) Nut-d



(1) Grommet Plate-e




(1) M10 Bolt-f




(1) M10 Washer-g




(1) Spring Washer-h



(1) C-clamp-i




(1) C-clamp Brace-j



(2) M10x15 Bolt-k




(3) C-clamp  
Brace Bolt-l




(1) Decorative Cover-m




(8) M8x10 Bolt-n




(24) M4x12  
Thumb Bolt-o




(24) M4x30 Bolt-p




(24) M4 Space-q



(1) Allen Key-r



(1) Wrench-s



(2) Spare Plastic  
Cover-t



**WARNING**



## CAUTION!

The monitor mount **must be securely attached** to a suitable desk top (minimum 25mm thickness recommended) **before fitting the arms and monitors**, failure to do this could lead to an unstable installation which could result in damage or injury.

## Step 1A

# C-clamp Installation

1. Install the C-clamp Brace (j) to the pole (a) using 3pcs C-clamp Brace Bolts (l), see Figure 1.
2. Install the C-clamp (i) to the pole assembly according to the thickness of the desktop. The thickness can be changed in three positions. Connect it using 2pcs M10x15 Bolts (k), and tighten using the Allen Key (r). Tighten the C-clamp to the desktop using the 2pcs eye bolts, see Figure 2.
3. Install the Decorative Cover (m).

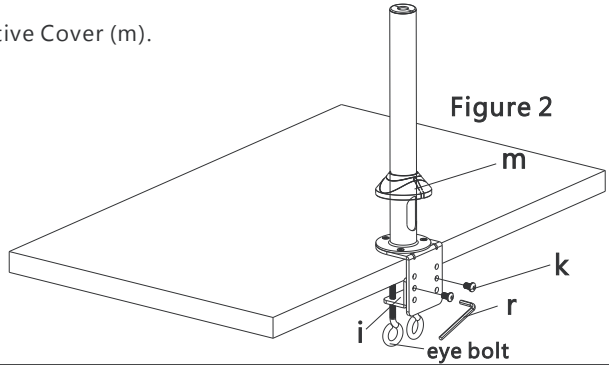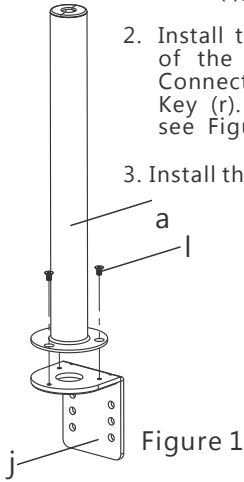


## Step 1B

# Existing Grommet Hole Installation

Remove the existing grommet to ensure a flat surface before installing the desk mount.


1. Position the Pole (a) on the mounting surface and secure using the Grommet Plate (e), M10 Washer (g), Spring Washer (h) and M10 Bolt (f). Fasten the M10 Bolt using provided wrench (s).
2. Install the Decorative Cover (m).

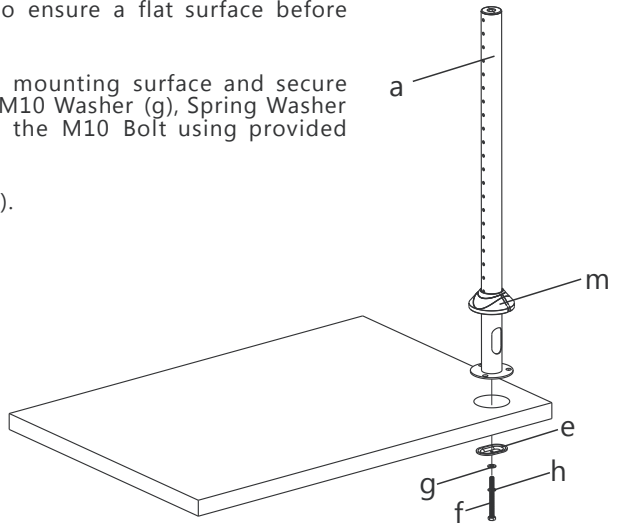

## Step 1C

## Drilled Grommet Hole Installation

1. Position the Pole (a) on the mounting surface and mark the center hole. Remove the pole. Drill a 10mm diameter hole at the marked position through the mounting surface.
2. Position the Pole (a) on the mounting surface and secure using the Grommet Plate (e), M10 Washer (g), Spring Washer (h) and M10 Bolt (f). Fasten the M10 Bolt using provided Wrench(s).
3. Install the Decorative Cover (m).

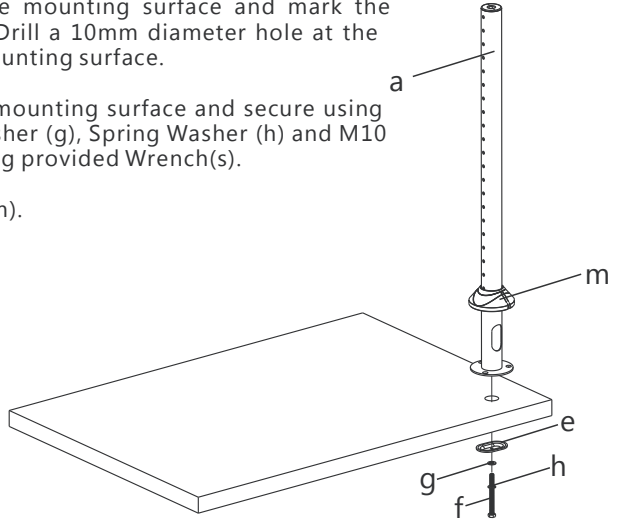


## Step 2

## Install Arms to the Pole


Install arms (b) to the pole(a), please ensure the wire clips on the arm (b) are on the under side of the arm.

Fasten the M8x10 Bolt (n) with the Allen Key supplied (r).

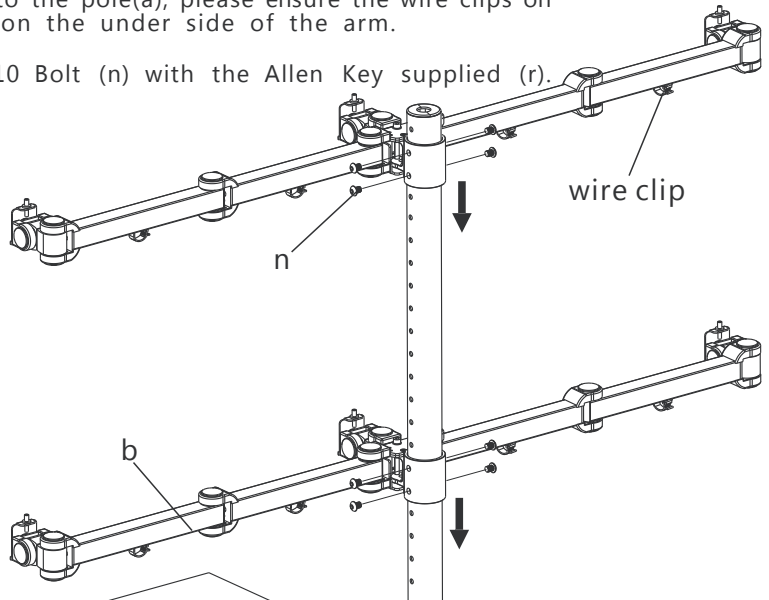


### Step 3

## Attach the VESA Plate to the Monitor

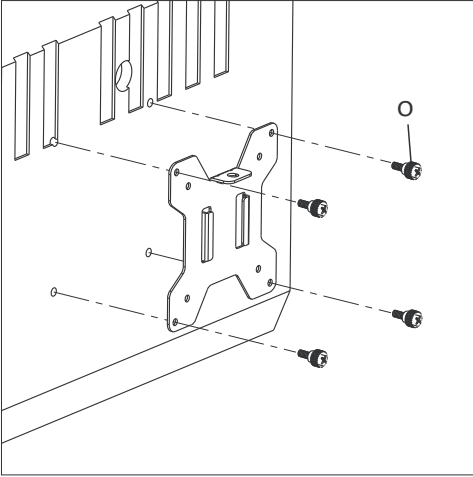

#### For Monitor with Flat Back


Use the hand turn screws (o) to secure the VESA plate directly to the monitor.

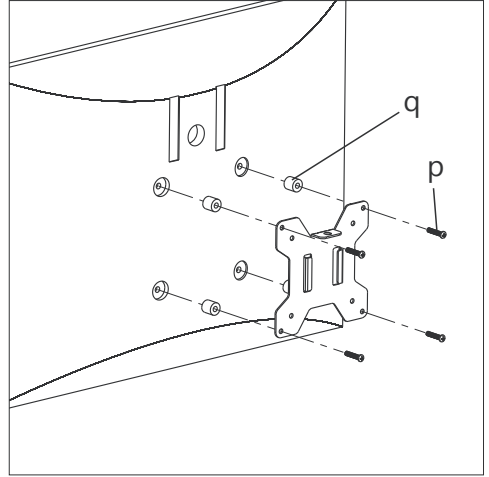


**For Monitor with Curved or Recessed Back** Use the plastic spacers (q) and the longer screws (p) to secure the VESA plate to the monitor.

### Step 4

## Slide the Monitor onto the Head of Arms

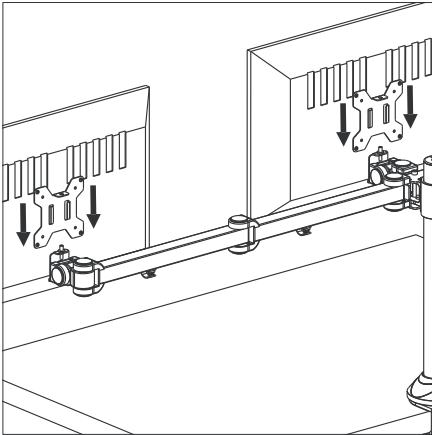

Slide the monitors onto the heads of the Monitor Arm (b) as shown in the above diagram.

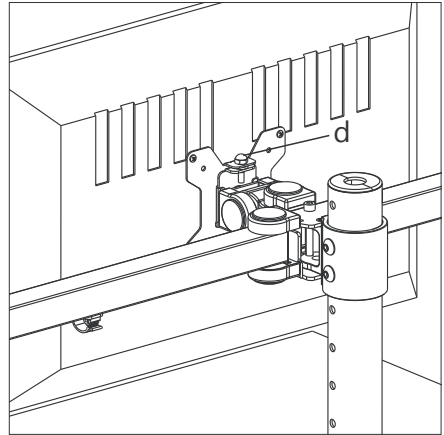


Install the security nut (d). Make sure the security nut is installed before you rotate the monitor.


## Step 5

## Adjust the Tilt Angle and Arms Torque

### Adjust the tilt angle tension

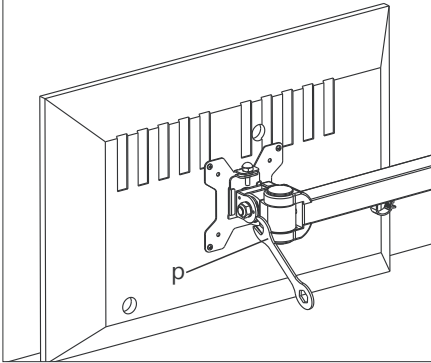


Remove the plastic cover, tighten the nut with the wrench (s) to adjust the tilt angle tension.

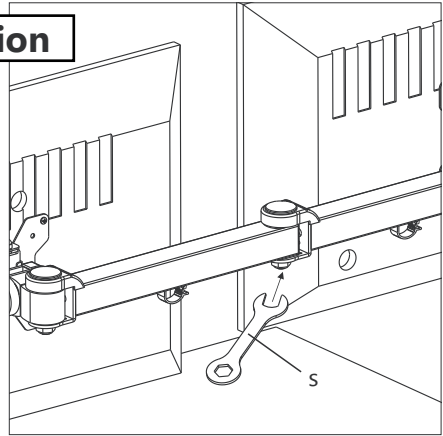


Remove the plastic cover, adjust the torque of Arms (b) with the supplied wrench (s).

## Step 6

## Adjust the Level of Monitors if necessary.

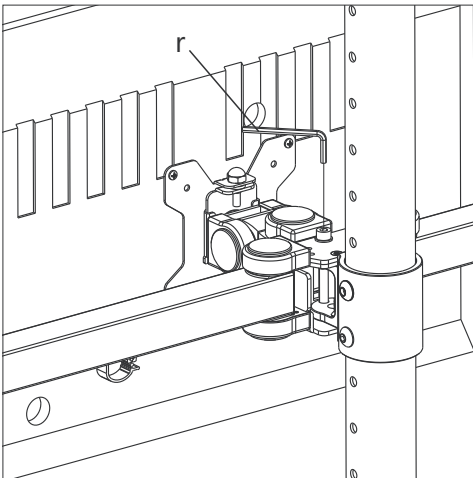

**To adjust the height of Centre Monitor:** Turn the bolt counterclockwise to lower the centre monitor, turn the bolt clockwise to raise the centre monitor.

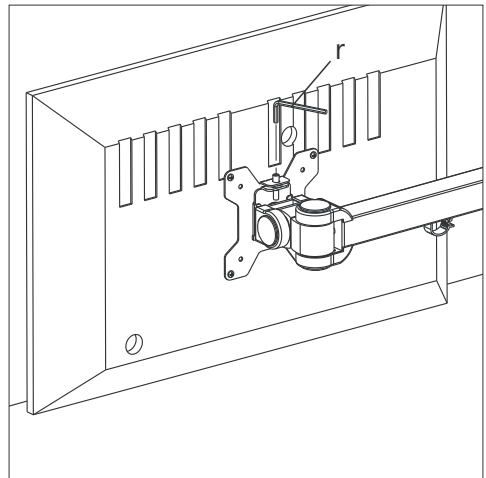

**To adjust the height of Side Monitors:** Remove the Nut (d) and turn the bolt counterclockwise with supplied Allen key (r) to raise the monitor. Install the Nut (d) after the adjustment.