



# *Prestige A3+*

---

## *Operations Manual*



## **Table of Contents**

Safety Instructions.....	p2
Technical Parameters.....	p2
Machine Views.....	p3
Operations Instructions.....	p4

# Safety Instructions

When using your Prestige A3+ Printer for DTF, basic precautions should always be followed.

1. Read all instructions.
2. Use the Prestige A3+ Printer only for its intended use.
3. To reduce the risk of electric shock, do not immerse the DTF printer in water or other liquids.
4. Do not disassemble or attempt to repair the DTF printer without qualified guidance. Please contact support for technical assistance.
5. The equipment is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of this equipment by a person responsible for their safety.
6. Close supervision is necessary for any DTF printer being used by or near children. Do not leave equipment unattended while connected.
7. The Prestige A3+ printer needs routine maintenance, please refer to the this manual.

## Technical Parameters

Model:	AA-PRESTIGE-A3-DTF
Printer Head:	Epson L1800 & 1390
Printing Width:	297 mm
Printing Resolution:	2880 x 1440 DPI
Printing Speed:	A3 size (1440 dpi / 5-7 min)
Ink System:	6 colors CISS
Software:	Cadlink Digital Factory V10 for DTF
Voltage:	110 Volts
Machine Size:	88 cm x 33 cm x 21.5 cm
Package Size:	38 cm x 84 cm x 30 cm
Packing:	Wooden Crate + Pearl Foam
Net/Gross Weight:	20 kg / 28 kg
Suitable Material:	Colton, polyser, PU
Warranty:	1-year warranty on non-consumable parts and 6-month warranty on Printhead

# Machine Views



# Operations Instructions

## 1. Connect the Prestige A3+ Printer for DTF to power



## 2. Turn on the system


2.1 Switch on the system




2.2 Turn on the printer.



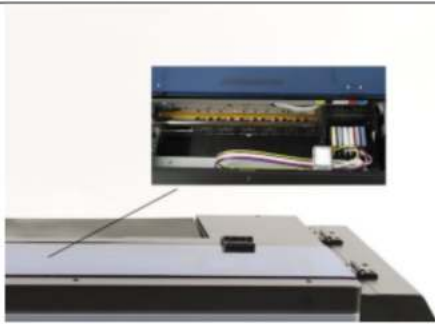



2.3 The power light will begin flashing as the auto inspection process begins.



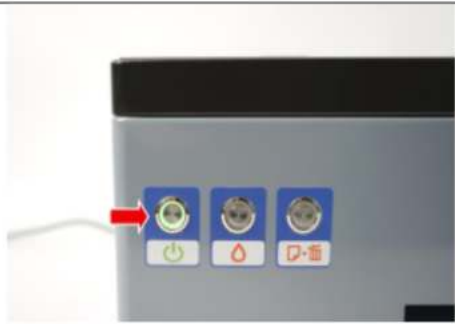

2.4 The printer is ready once the power light stops flashing

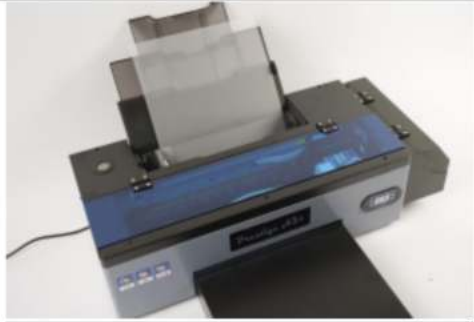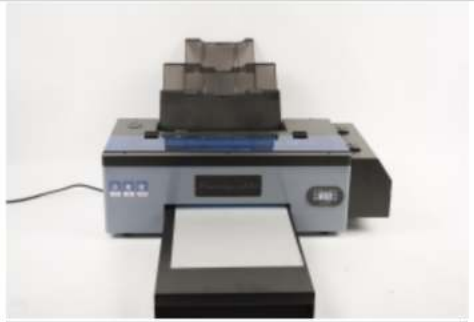


### 3. Paper rolling test.

3.1 Load one piece of film	3.2 Press paper / delete button.
	
3.3 Check if the paper can roll into the printer.	3.4 Check if the paper rolls out properly
	

### 4. Install waste ink bottle.

4.1 Remove waste ink bottle from the printer ink box.	4.2 Install waste ink bottle onto the back cover of the machine. Then, insert the waste ink tube into the bottle.
	

## 5. Place the waste ink plates under the printer.

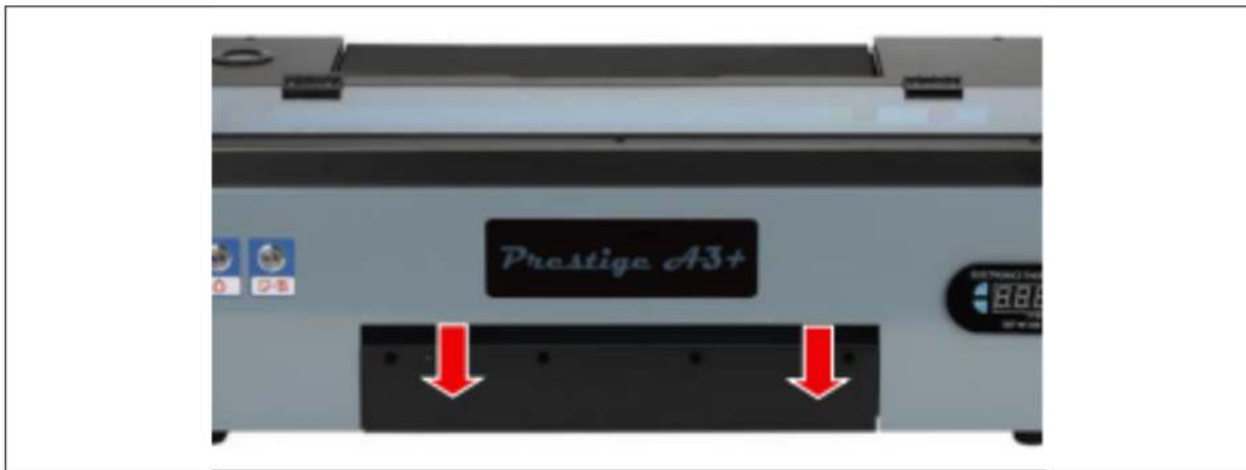

## 6. Fill the ink reservoirs.

6.1 Open the printer ink box cover.



6.2 Fill the ink reservoirs according to each color on the label.



## 7. Pull the inks into the ink cartridges.

7.1 Take out the ink cartridges from the printer head



7.2 Use the injector to pull ink into each cartridge from the ink reservoirs by pulling the injector plunger.



## 8. Pull ink into the waste ink bottle.

8.1 Remove the ink waste tube from the ink waste bottle and withdraw waste ink with the injector by pulling the injector plunger.

8.2 re-insert the waste ink tube into the waste ink bottle.



## 9. Head to Software Installation.

Please refer to <https://bit.ly/df-station-cadlink-installation>

## 10. Routine Maintenance & Troubleshooting

For further instructions on how to care for and maintain your printer, please reference our video manuals here: <https://bit.ly/df-station-prestige-playlist>