

STROBEPRO.COM

X60 

User Manual

Ver. 1.0


Table of contents

Quick start	3
Select mode	3
Connect to XTC, XTN or XTS	4
Setting Custom Functions	5
Technical Data	5

For your safety

To prevent damage to your product or injury to you or to others, read the following safety precautions in their entirety before using this device. Failure to observe the precautions listed in this section could result in damage to the product.

- ▲ Do not disassemble or modify
- ▲ Keep dry
- ▲ Do not handle with wet hands or immerse in or expose to water or rain
- ▲ Do not use in the presence of flammable gas
- ▲ Keep out of reach of children
- ▲ Turn off the speedlite immediately in the event of malfunction
- ▲ Do not expose to high temperature
- ▲ Do not leave the device in a closed vehicle in the sun or in other areas subject to high temperature
- ▲ Observe precautions when handling batteries

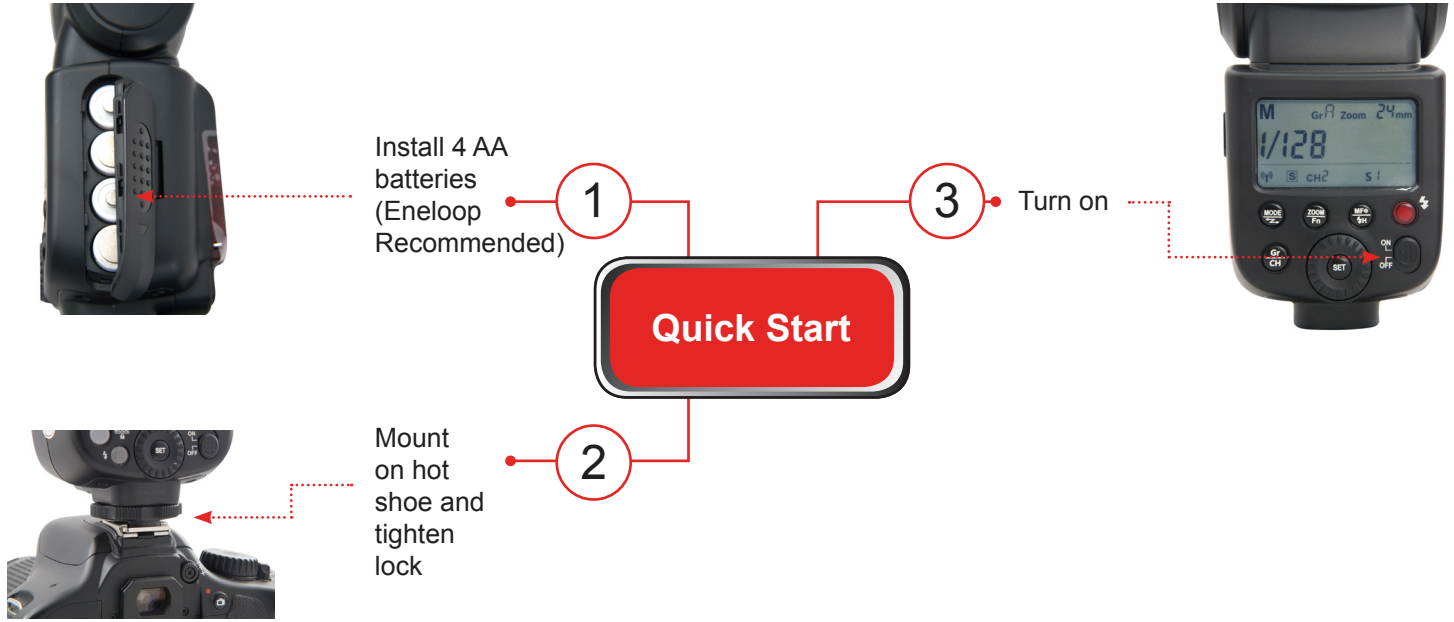



1 Turn on your X60M speedlite



2 To enable built-in wireless mode, hold the MODE/Wireless button for 3 seconds.



3 Using the Select Dial, select S (slave mode). Press SET button to confirm.



4 To select the channel number

Hold the Group/Channel button for 3 seconds



5 Using the Select Dial set the channel number to the same number on the XTC, XTN or XTS, then press SET button to confirm



5

To select the group, press the Group/Channel button once to change to group A, B, C, D or E.

High speed sync (HSS) is only available when used with XTC, XTN or XTS. Be sure HSS is enabled in your camera. The X60M will automatically detect HSS.



Function	Description	Values
SL	Sleep time	3, 10, 30, 60, OFF
FC	Focus beam	10, 20, 30 seconds
BP	Recycle beep	On, Off
BL	Back light	12 seconds, On, Off
OS	Optical slave	S1, S2, Off

Technical Data

Power	4 x AA batteries. LR6 alkaline or Ni-MH rechargeable batteries (preferred)
Guide No. (m ISO 100)	60 (1/1 ZOOM 105)
Vertical rotation angle	-10 - 90 degrees
Horizontal rotation angle	0 - 270 degrees
Colour temperature	5600k ± 200k
Recycle time	Approximately 0.1 - 5 seconds (alkaline batteries used)
Flash duration	1/300s - 1/2000s
Multi Flash	1-99 times; 1-99 Hz
Dimension	83mm x 154mm x 112mm
Net weight	380g