

# Lead Glass Pro

[www.leadglasspro.com](http://www.leadglasspro.com)

## 2mm (5#) Lead Equivalent X-Ray Glass

**Brand Name:** XtraClear X-Ray Glass by Lead Glass Pro

### Technical Data

Thickness: 5/16" (8.4mm)


Thickness Tolerance: +/- 0.030"

Lead Equivalency @ 150 KVP: 2mm - 5# - 5/64"

Weight Per Square Foot: 8.5#

Light Transmission: 85%+

Density (g/cm<sup>3</sup>) ≥ 4.8

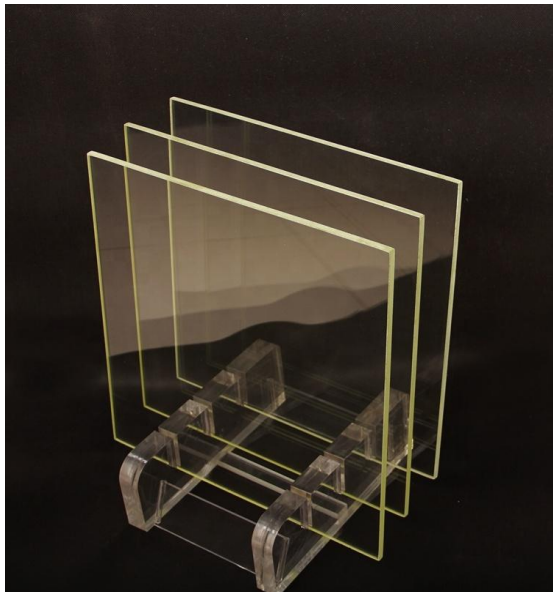

### Product Overview

- 60% minimum heavy metal oxide content
- 55% minimum lead oxide content

### Clean and Handle with Care

- Clean lead glass with a soft dry or damp microfiber cloth only
- Lead glass will absorb harsh chemicals and stain easily
- Lead glass scratches easily

### Optional

- Permanently labeled as safety glass meeting ANSI Z97.1 and CPSC 16 CFR Part 1201 Cat I
- Safety glass is required in doors, within 24" of a door, and within 18" of a floor
- Other lead equivalencies are available. It is the customer's responsibility to verify the proper lead equivalency

