

Game Country

Day - II WTFS

Easy DIP Switch Programming

This version of the Day II consist of our proven Day II controller installed in a imported case for easy installation. Four (4) self-tapping screws are included.

Use 6 or 12 volt battery but **12 volt** recommended for best performance.

NOTE: when connecting battery observe "wire" color. Red (+), Black (-)
When replacing battery grasp wire connector firmly **do not pull on wire.**


Motor Test:

Momentarily press TEST push button. Motor will run following a 10 second delay.

| Motor Run Time DIP Switch #1 | Run time | Motor Speed DIP Switch #1 | Speed |
|---------------------------------|--------------------------|------------------------------|---------------------|
| Switch 1 on | * 2 seconds | Switch 6 on | Slow |
| Switch 2 on | * 4 seconds | Switch 7 on | Slower |
| Switch 3 on | 8 seconds | Switch 8 on | Slower still |
| Switch 4 on | 16 seconds | 6 8 on | Slowest speed |
| Switch 5 on | 32 seconds | 6 8 off | * High Speed |
| 1-5 off | → 3 sec. on 3 sec. off → | 5 on-off cycles | |

(motor run times are cumulative)

| DIP Switch #2 | A.M. Feed Times | DIP Switch #3 | P.M. Feed Times |
|---------------|------------------------|---------------|---------------------------------|
| Switch 1 on | 2 hrs. before daybreak | Switch 1 on | 5 hrs. before nightfall |
| Switch 2 on | 1 hr. before daybreak | Switch 2 on | 4 hrs. before nightfall |
| Switch 3 on | * Daybreak | Switch 3 on | 3 hrs. before nightfall |
| Switch 4 on | 1 hr. after daybreak | Switch 4 on | 2 hrs. before nightfall |
| Switch 5 on | 2 hrs. after daybreak | Switch 5 on | * 1 hr. before nightfall |
| Switch 6 on | 3 hrs. after daybreak | Switch 6 on | Nightfall |
| Switch 7 on | 4 hrs. after daybreak | Switch 7 on | 1 hr. after nightfall |
| Switch 8 on | 5 hrs. after daybreak | Switch 8 on | 2 hrs. after nightfall |

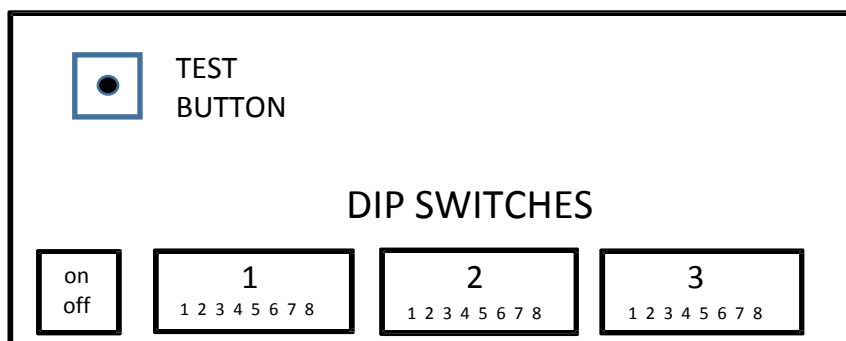

2403 Commerce Lane
Albany, GA 31707
229-883-4706

support@gamecountry.com
www.GameCountry.com

* Bold = Factory Default