

**Low Profile T5 Fluorescent Emergency
Ballast 800 Lumens**



Project:	
Catalog#:	
Approved by:	

Warranty & Listings

- Five year warranty against defects in material and workmanship (lamps excluded).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Suitable for use in sealed and gasketed fixtures.

Lamp Compatibility

- Compatible with most one-, two-, three-, and four-lamp electronic standard and dimming AC ballasts.
- Operates one or two T5, T5HO, T8, T12, Circular T5/T9, Ubend T8/T12, 4-Pin CFL and long CFL lamps in emergency mode. Refer to the chart on the next page for a complete list of compatible lamps.

Illumination

- Works with or without an AC ballast to convert new or existing fluorescent fixtures in to unobtrusive emergency lighting.
- Operates one lamp in the emergency mode for a minimum of 90-minutes.
- Provides a maximum initial lumen output of 800 lumens.

Electrical

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 6V long life, maintenance-free, rechargeable sealed NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to fluorescent lamp(s) for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Time delay enhancement to overcome end-of-life circuit-protection.


Mounting

- Suitable for installation inside, on top or in remote* of the fixture.
- Can be used in both switched and unswitched fixtures.
- UL Listed for factory or field installation.


Housing

- Low profile galvanized steel construction.
- Compact design fits most fluorescent fixtures.

* When battery packs are remote mounted, the remote distance cannot exceed 1/2 of the distance from ballast to lamp specified by the A.C. ballast manufacturer. The maximum allowable remote mounting distance is 50 feet.

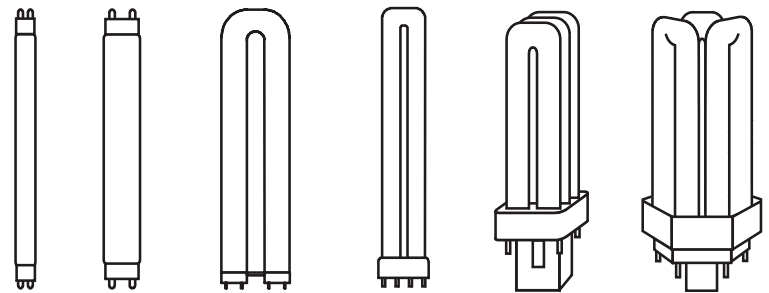

Dimensions

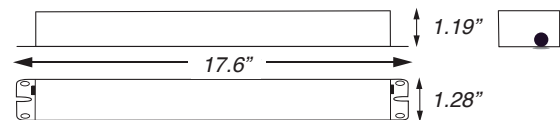

Low Profile T5 Fluorescent Emergency
Ballast 800 Lumens

Project:	
Catalog#:	
Approved by:	

Electrical Information

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
BALT5-800TD	2.7	2.7	0.130	0.130

Lamp Compatibility Chart

LAMP TYPE	W	ATTS	INITIAL LUMENS	
			1-Lamp	2-Lamp
T5		21	500n	/a
T5		28	750n	/a
T5		35	800n	/a
T5HO2		47	25	n/a
T5HO3		97	50	n/a
T5HO5		48	00	n/a
T8		28	650n	/a
T8		32	700n	/a
T8		40	675n	/a
T124		06	50	n/a
CFL 2G11		36	675n	/a
CFL 2G11		40	675n	/a

LAMP TYPE	W	ATTS	INITIAL LUMENS	
			1-Lamp	2-Lamp
CFL 2G11		50	725n	/a
CFL 2G11		55	725n	/a
CFL GR10q-4		28	500	550
CFL GR10q-4		38	600n	/a
Circular T93		24	00	n/a
Circular T94		04	75	n/a
Circular T52		24	25	n/a
Circular T54		06	50	n/a
Circular T55		57	25	n/a
U-bend T83		24	50	n/a
U-bend T12		40	400n	/a

NOTE: In 2-lamp operation, lumens are equally split between the two lamps.

