

ZOS

ZERO OXYGEN SOLUTIONS

HALO

WINE PRESERVER

OWNERS MANUAL

READ CAREFULLY BEFORE USE


WWW.ZOSWINE.COM

SUPPORT@ZOSWINE.COM

COMPONENTS:

ZOS HALO

HALO Preserver (with blank cartridge)



Holder



Cartridge






Cartridge Tube



Batteries (LR44, QTY. 2)




ZOS HALO

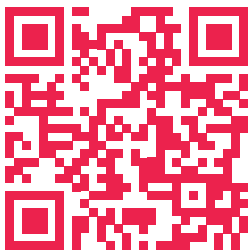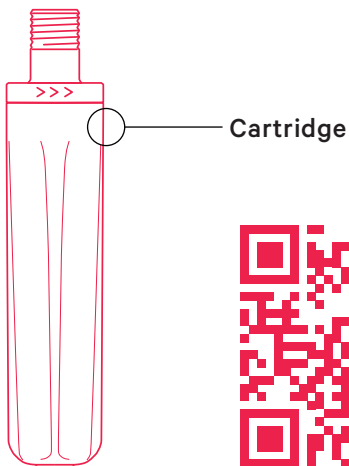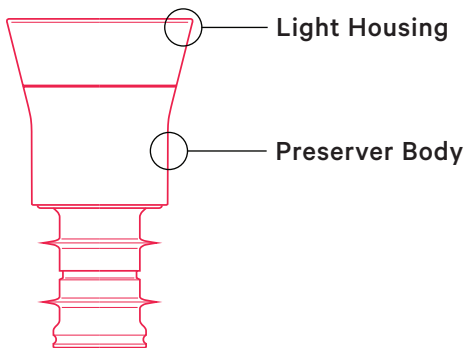

scan for instructional video
WWW.ZOSWINE.COM/GETSTARTED


SET UP

READ CAREFULLY
BEFORE USE

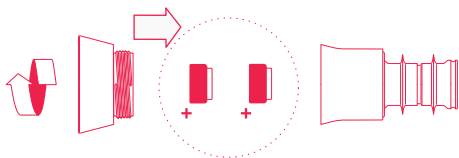

Install Batteries

Unscrew Light Housing from Preserver Body and install both batteries into Light Housing.




Install Cartridge

- Remove blank Cartridge from HALO preserver and discard.
- Remove new Cartridge from Cartridge Tube.
- Shake new Cartridge for 5 seconds before installing into HALO.
- Thread new Cartridge into Preserver Body.
DO NOT OVERTIGHTEN OR CRUSH.
- A **BLUE LIGHT** indicates HALO is now operating properly and ready for testing.
- **Immediately after installing new Cartridge, insert HALO into Holder and install cap.**
- **EXPOSURE TO AIR SIGNIFICANTLY REDUCES CARTRIDGE LIFE.**

SEE OUR INSTRUCTIONAL VIDEO
WWW.ZOSWINE.COM/GETSTARTED

TESTING CARTRIDGE

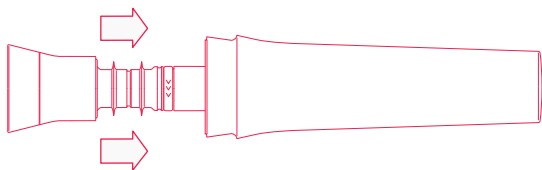

- To perform a test, pull HALO out of Holder and reinsert firmly.
- HALO will flash alternating **RED/GREEN** indicating cartridge testing.
- A solid Green or Red light will appear after the flashing stops.
 - **GREEN** = Cartridge is ready for use.
 - **RED** = Cartridge needs to be replaced.
- Always retest the Cartridge with each new bottle.
- **HALO should immediately be returned to Holder, when not in use.**

USING HALO

- Always test HALO before each new bottle by following the TESTING CARTRIDGE instructions above.
- Once you've confirmed the Cartridge is good (**GREEN LIGHT**), insert into wine bottle immediately.
- A **GREEN LIGHT** will flash with any bottle motion, indicating proper operation.
- HALO will not seal in some screw cap bottles (necks are too large).
- At least one glass of wine should be removed from bottle before inserting HALO.
- **To preserve Cartridge life, place HALO back into the bottle immediately after pouring.**

IMPORTANT NOTES

- **EXPOSURE TO AIR SIGNIFICANTLY REDUCES CARTRIDGE LIFE.**
- Always store in Holder when not in use.
- **Do not lay bottle on its side when using HALO.**
- Shake new Cartridges for 5 seconds before installing into HALO.

MAINTENANCE

No Lights:

- Verify Cartridge is screwed in completely. (Do not over-tighten or crush).
- Change Batteries

Battery Replacement:

- Remove Cartridge and place into Cartridge Tube before replacing batteries. Replace using two LR44 batteries.

Cleaning:

- When needed, clean HALO using a damp cloth only.
- HALO is not dishwasher safe, do not submerge in water.

ZOS
HALO