

# Aurelia Wave T3 3 Group Spec Sheet

## Water Requirements

- 3/8" dedicated cold water line with shut-off valve and compression fitting.
- Water hardness cannot exceed 3gpg or 50 ppm. If water hardness exceeds 3gpg a water softener must be installed.
- Minimum incoming water flow rate of 35 GPH and maximum line pressure of 70 PSI / 5 BAR.

## Water Filtration System

- Sediment / Chlorine
- RCF 124 - 1100 grains
- RCF 195 - 4350 grains

## Water Softener/Maintenance Calculation

$$\frac{\text{Cartridge Grain Capacity}}{\text{Water Hardness (grains per gallon)}} = \text{Gallon Capacity of Cartridge} \div \frac{\text{Gallons of Water Used per Day}}{\text{Days Until Cartridge Needs to be Replaced}}$$


---


$$\frac{\quad}{\quad} \div \frac{\quad}{\quad} = \frac{\quad}{\quad} \div \frac{\quad}{\quad} = \frac{\quad}{\quad}$$

## Power Requirements

- Volts: 220 (voltage range of 208-240)
- Watts: 8250
- Amp draw: 38
- Receptacle: Nema 6-50



Nema 6-50



NSF / ANSI Std.4

**WARNING: Warranty void if unit is connected without a water filtration system**

The average water consumption of this machine is 6 gallons per day, which represents 196 drinks at 4oz per drink.

## Counter Space Requirements


- Height: 22 inches
- Depth: 24 inches
- Width: 41 inches
- Weight: 230 pounds

## Shipping Dimensions & Weight

- Height: 27 inches
- Depth: 27 inches
- Width: 45 inches
- Weight: 250 pounds

## Drain Requirements

- Open gravity drain of minimum 1.25 inch I.D., within 4 feet of the machine.

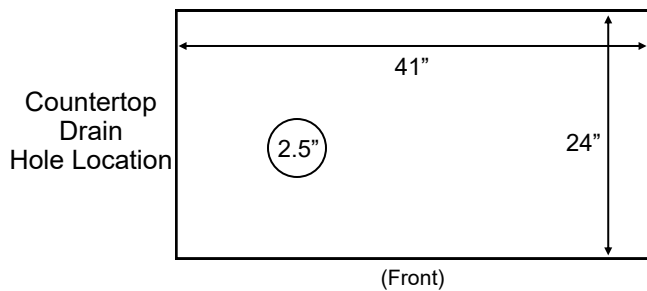

I, the customer, understand that these requirements must be in when the installer arrives. Failure to have the site ready will result in additional service and travel charges, and may cause further delays in installation.

Customer Name: \_\_\_\_\_ Signature: \_\_\_\_\_  
 Company Name: \_\_\_\_\_  
 Phone: \_\_\_\_\_ Fax: \_\_\_\_\_ Email: \_\_\_\_\_