

Figure 4

### Metal Surface Test after Cerma STM-3 Treatment:

Bore measure Before Treatment: 2.5612", Bore measure After Treatment: 2.5620"  
 Difference in Bore measurement: 0.0008"  
 $20.32\mu\text{m}/2 = 10.16 \mu\text{m}$  thickness Cerma STM-3 Treatment applied to  
 a achieve smooth surface.

Cerma, once cured, will not allow any additional coats to be laid  
 down on the now sealed surface

5/11

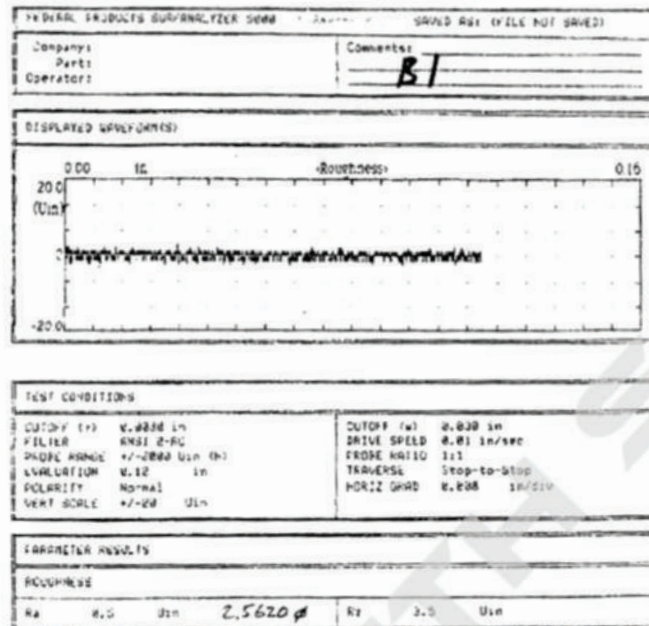


Figure 5