



Xcluder® Garage Door Seal Installation Instructions

Use for Part #162653, 162654, 162655

Thank you for your purchase of an **Xcluder® Pest Control Garage Door Seal**, the best way to close the door on unwanted pests.

NOTE: This seal designed to fit garage doors with 1/4" T-channel retainers. If your door is not so equipped or the retainer is damaged, a replacement can be obtained from many garage door supply and home improvement retailers or by contacting Xcluder® directly.

Tools Required:

1. Locking pliers or C-clamp
2. Sturdy shears



Caution!

If your door is connected to an automatic opener, be sure to disengage the opener before beginning work. At no time should you remove bottom roller carrier because it is under spring tension.

If complications do occur, contact a qualified door dealer for service. Never use a board or ladder to prop the door open.

Installation Instructions:

1. **STEP 1:** Unplug garage door opener and manually disconnect opener from the door, if applicable. Open garage door to full open position. Secure door in this position by placing a vice grip or C-clamp above top roller (Figure 1). Place another vice grip or C-clamp below bottom roller (Figure 2) to keep door from moving.
2. Slide old seal out one end. Slide in full length of new seal flush with one end. If sticking occurs, dish soap or silicone spray can be used as a lubricant. Go to other end, push about one inch extra into retainer, and crimp retainer (Figure 3). This procedure is to hold astragal in place due to shrinking. Trim end flush with door edge.
3. Remove clamps, close door, and readjust lock if necessary.

GARAGE DOOR OPENER OWNERS PLEASE READ!

4. Reconnect opener to the garage door and plug it in. **SAFETY REVERSE AND TRAVEL OF THE GARAGE DOOR OPENER MUST BE TESTED.** Refer to door opener manual for proper procedures or contact a qualified door agency for service.

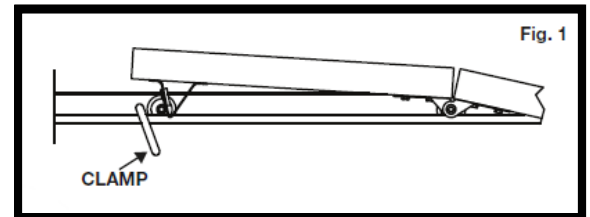


Fig. 1

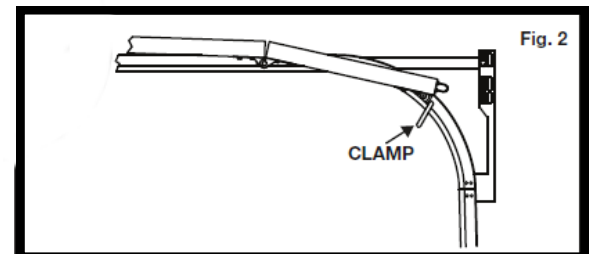


Fig. 2

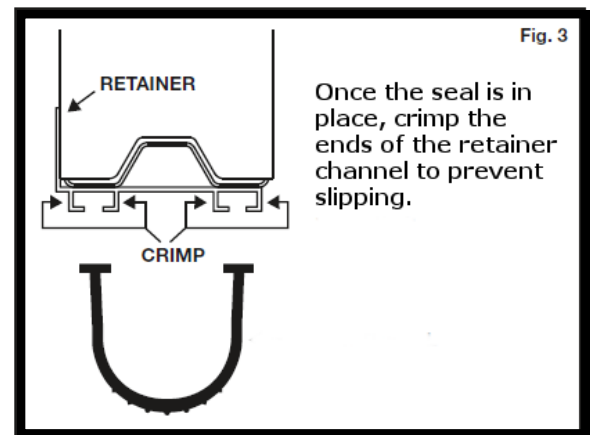


Fig. 3