

# LIMITLESS™ Power Bank Docking Station

Quick Start Guide



## WHAT'S INCLUDED

- (1) Power Bank
- (1) Docking Station
- (1) 36in Type-C Cable
- (1) Type-C Wall Adapter




## COMPONENTS

### Docking Station

1. Type-C 1 | Adapter (Output)
2. Type-C 2 | Charging Port (Output)
3. Type-C 3 | Power Port (Input)
4. AM/PM Indicator
5. LED Power Indicator Light
6. Digital Clock
7. USB Charging Port 1 (Output)
8. USB Charging Port 2 (Output)
9. Mode Button (M)
10. Minus Button (-)
11. Plus Button (+)

### Power Bank

12. Digital Battery Level Indicator
13. USB Charging Port 1 (Output)
14. Type-C Charging Port (Input/Output)
15. USB Charging Port 2 (Output)
16. Power Button
17. Dual Wireless Charging Pad

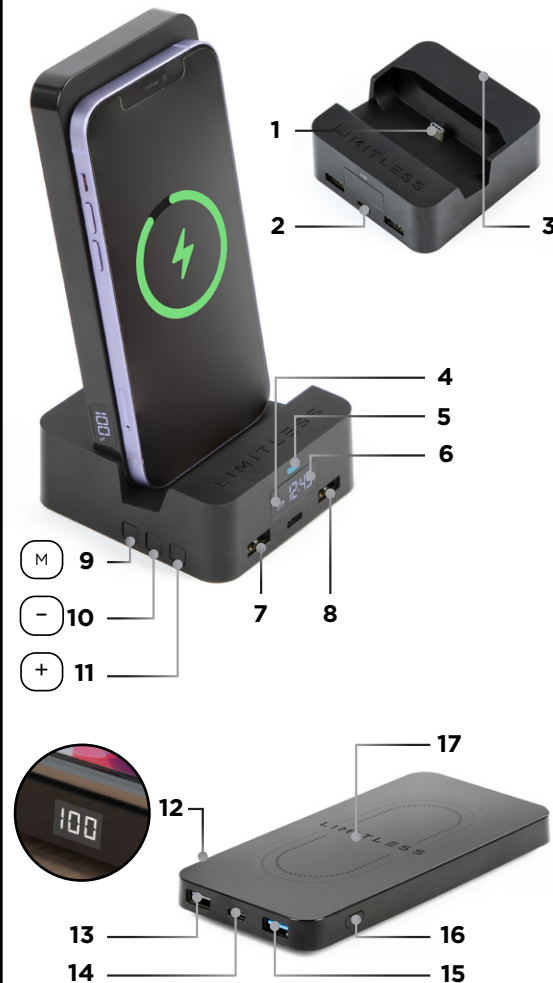

## GETTING STARTED

### Setting Up The Docking Station

1. Plug the Type-C Wall Adapter into an outlet.
2. Plug the 36in Type-C to Type-C Cable into the Type-C Wall Adapter and into the Type-C Power Port on the back of the Docking Station.
3. Install the Power Bank on the Docking Station by aligning the Type-C Charging Port on the Power Bank into the Type-C Adapter (Output) on the Docking Station.

### Setting the 12-Hour Clock

- (M) Single Click:** Switch Between Hour/Minute
- Press & Hold (2 Seconds):** Enter Time Setting Mode
- (+) Single Click:** Increase the Value By 1
- Press & Hold:** Increase the Value By 8 per Second
- (-) Single Click:** Decrease the Value By 1
- Press & Hold:** Decrease the Value By 8 per Second

## LIMITLESS™

All rights reserved. Limitless™ is a trademark of Limitless Innovations, Inc. Design and specifications subject to change without notice. Products may vary from images shown. Accessories sold separately.

**LimitlessInnovations.com**  
Support@LimitlessInnovations.com  
(855) 843-4828

Limitless Innovations, Inc.  
4800 Metalmaster Way  
McHenry, IL 60050

© Limitless Innovations, Inc.

Scan to learn more about using  
the features of your  
Power Bank Docking Station:



Designed In USA. Made In China.

## TECH SPECS

**Model:** LIM-10PBDS-XXX

### Docking Station:

**Type-C 1 | Adapter (Output):**

PD 20W - 5V/3A | 9V/2.22A | 12V/1.67A

**Type-C 2 | Charging Port (Output):**

PD 20W - 5V/3A | 9V/2.22A | 12V/1.67A

**Type-C 3 | Power Port (Input):**

12V/3.67A

**USB Charging Port 1 (Output):**

QC 18W - 5V/3A | 9V/2A | 12V/1.5A

**USB Charging Port 2 (Output):**

QC 18W - 5V/3A | 9V/2A | 12V/1.5A

**Dimensions:** 3.15 in x 3.35 in x 1.30 in

**Weight:** 3.19 oz (0.19 lb)

### Wall Adapter:

**Input:** 110V-240VAC | 50/60Hz | 1.6A

**Output:** 12V/3.67A | 44W

**Dimensions:** 2.44in x 2.01 in x 1.1 in

**Weight:** 2.99 oz (0.19 lb)

### Power Bank:

**Battery Capacity:** 10,000mAh

**Recharging Time (From 0%):** ±4 Hours

**Type-C Charging Port (Input):**

5V/3A | 9V/2A | 12V/1.5A

**Type-C Charging Port (Output):**

PD 18W - 5V/3A | 9V/2.22A | 12V/1.67A

**USB Charging Port 1 (Output):** 5V/2.4A

**USB Charging Port 2 (Output):**

QC 18W - 5V/3A | 9V/2A | 12V/1.5A

**Wireless Charger:** 5W | 7.5W | 10W

**Total Power (Output):** 18W

**Dimensions:** 6.06 in x 2.91 in x 0.63 in

**Weight:** 8.50 oz (0.53 lb)

### Environmental Conditions

**Operating Temperature:**

-23°-113°F (-5° ~ 45°C)

**Storage Temperature:**

-4°-158°F (-20° ~ 70°C)

**Operating Humidity:**

35-85% RH. Non-Condensing

**Storage Humidity:**

5-95% RH. Non-Condensing

### Total Power Outputs:

#### Docking Station

**USB 1 + Type-C 1 Output:**

5V/3A 15W Max

**USB 2 + Type-C 2 Output:**

5V/3A 15W Max

**USB 1 + USB 2 Output:**

QC3.0 18W + QC3.0 18W | Total: 36W

**Type-C 1 + Type-C 2 Output:**

PD 20W + PD 20W | Total 40W

**USB 1 + Type-C 1 + USB 2 Output:**

5V/3A + QC 18W | Total 31W

**USB 1 + Type-C 1 + Type-C 2 Output:**

5V/3A + PD 20W | Total 35W

**USB 1 + USB 2 + Type-C 1 Output:**

5V/3A + QC 18W | Total 31W

**USB 2 + Type-C 1 + Type-C 2 Output:**

5V/3A + PD 18W | Total 35W

**Total Output:** 30W Max

#### Power Bank

**USB 1 + USB 2 + Type-C 1 Output:**

5V/3A 15W Max

**USB 2 + TYPE-C 2 Output:**

5V/3A 15W Max


## CHARGING

### Recharging the Power Bank

A. Install the Power Bank on the Docking Station By Connecting to the Type-C Adapter.

OR

B. Plug the 36in Type-C to Type-C Cable into the Type-C Wall Adapter and the Type-C Charging Port on the Power Bank.

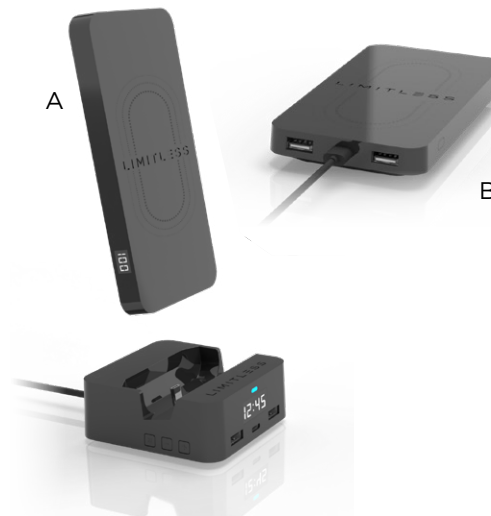

### Charging a Device

#### A. On the Docking Station

1. Select your charging method:

a. **USB Charging Port 1**

b. **USB Charging Port 2**

c. **Type-C Charging Port**

d. **Wireless Charger\***

*\*When Power Bank is Docked*

#### B. With Power Bank

1. Select your charging method:

a. **USB Charging Port 1**

b. **USB Charging Port 2**

c. **Type-C Charging Port**

d. **Wireless Charger**

When using charging methods a-c, connect a compatible charging cable (not included) to the Docking Station or Power Bank and to the charging port on the device.



### Using the Wireless Charger

1. Press the Power Button on the side of the Power Bank.
2. Place a compatible device on top of the Wireless Charger. If there is a successful connection the green icon will illuminate on the Digital Display.

If the device does not begin charging, try adjusting the positioning of the device on the wireless charger until a successful connection is made.

If the device is not enabled with wireless charging, please charge using one of the USB or Type-C Charging Ports.