


MODEL NO.	PRODUCT NO.	HP	PRESSURE PSI	ACFM @ LOAD PRESSURE	MOTOR RPM	NOMINAL SOUND @ 1	FULL LOAD CURRENT (AMPS)	AIR RECEIVER	DRYER	FILTER ELEMENT	WEIGHT LBS	
NO.	NO.		FOI	PHESSURE	HPIVI	METRE	230V/1/60	GAL.		CLEIVICINI	LDO	
D5	S-002520-CH	5	110-145	15	1740	65 dBA	28	60	ASD-15 115V, 60Hz, 2.2A	1 MICRON	505	
	EXHAUST AIR OUTLET				REMOVABLE SERVICE CAP			INSTALLATION REQUIREMENTS				




- MAINTAIN 3 FEET DISTANCE FROM WALLS AND OTHER OBJECTS FOR PURPOSE OF COOLING AND SERVICING.
- 2. COMPRESSOR MUST BE LEVEL AND ANCHORED DOWN TO SOLID LEVEL FLOOR.
- 3. AMBIENT CONDITIONS: 10°C (50°F) MIN. 40°C (104°F) MAX.



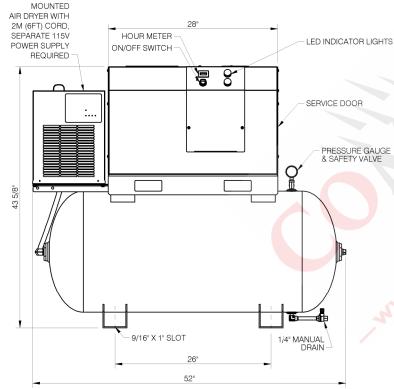

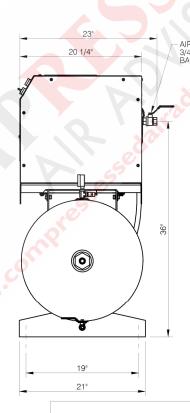

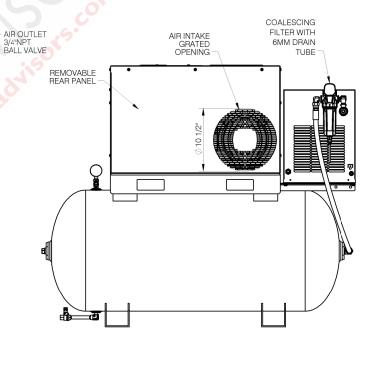

IMPORTANT NOTE: This print is the confidential property of GARDNER DENVER, INC. It is not to be used or reproduced in any manner, nor submitted to other parties for examination without the prior approval of GARDNER DENVER, INC. GARDNER DENVER, INC. is continually trying to improve its products, specifications subject to change without notice.

REV. DATE REVISION DESCRIPTION ECN NO.

	NAME OF	PROJECT	DESCRIPTION OF DRAWING				
D5	SCREW C	OMPRESSO	SALES-ENGINEERING DRAWING				
				DRAWING NO.	SHT NO	REV	
DRAWN BY	CHECKED BY	DATE	SCALE	D.F. 6.F.	1 /1	00	
EH		03/06/19	N.T.S	D5-SE	1/1	00	