


4

3

2

1

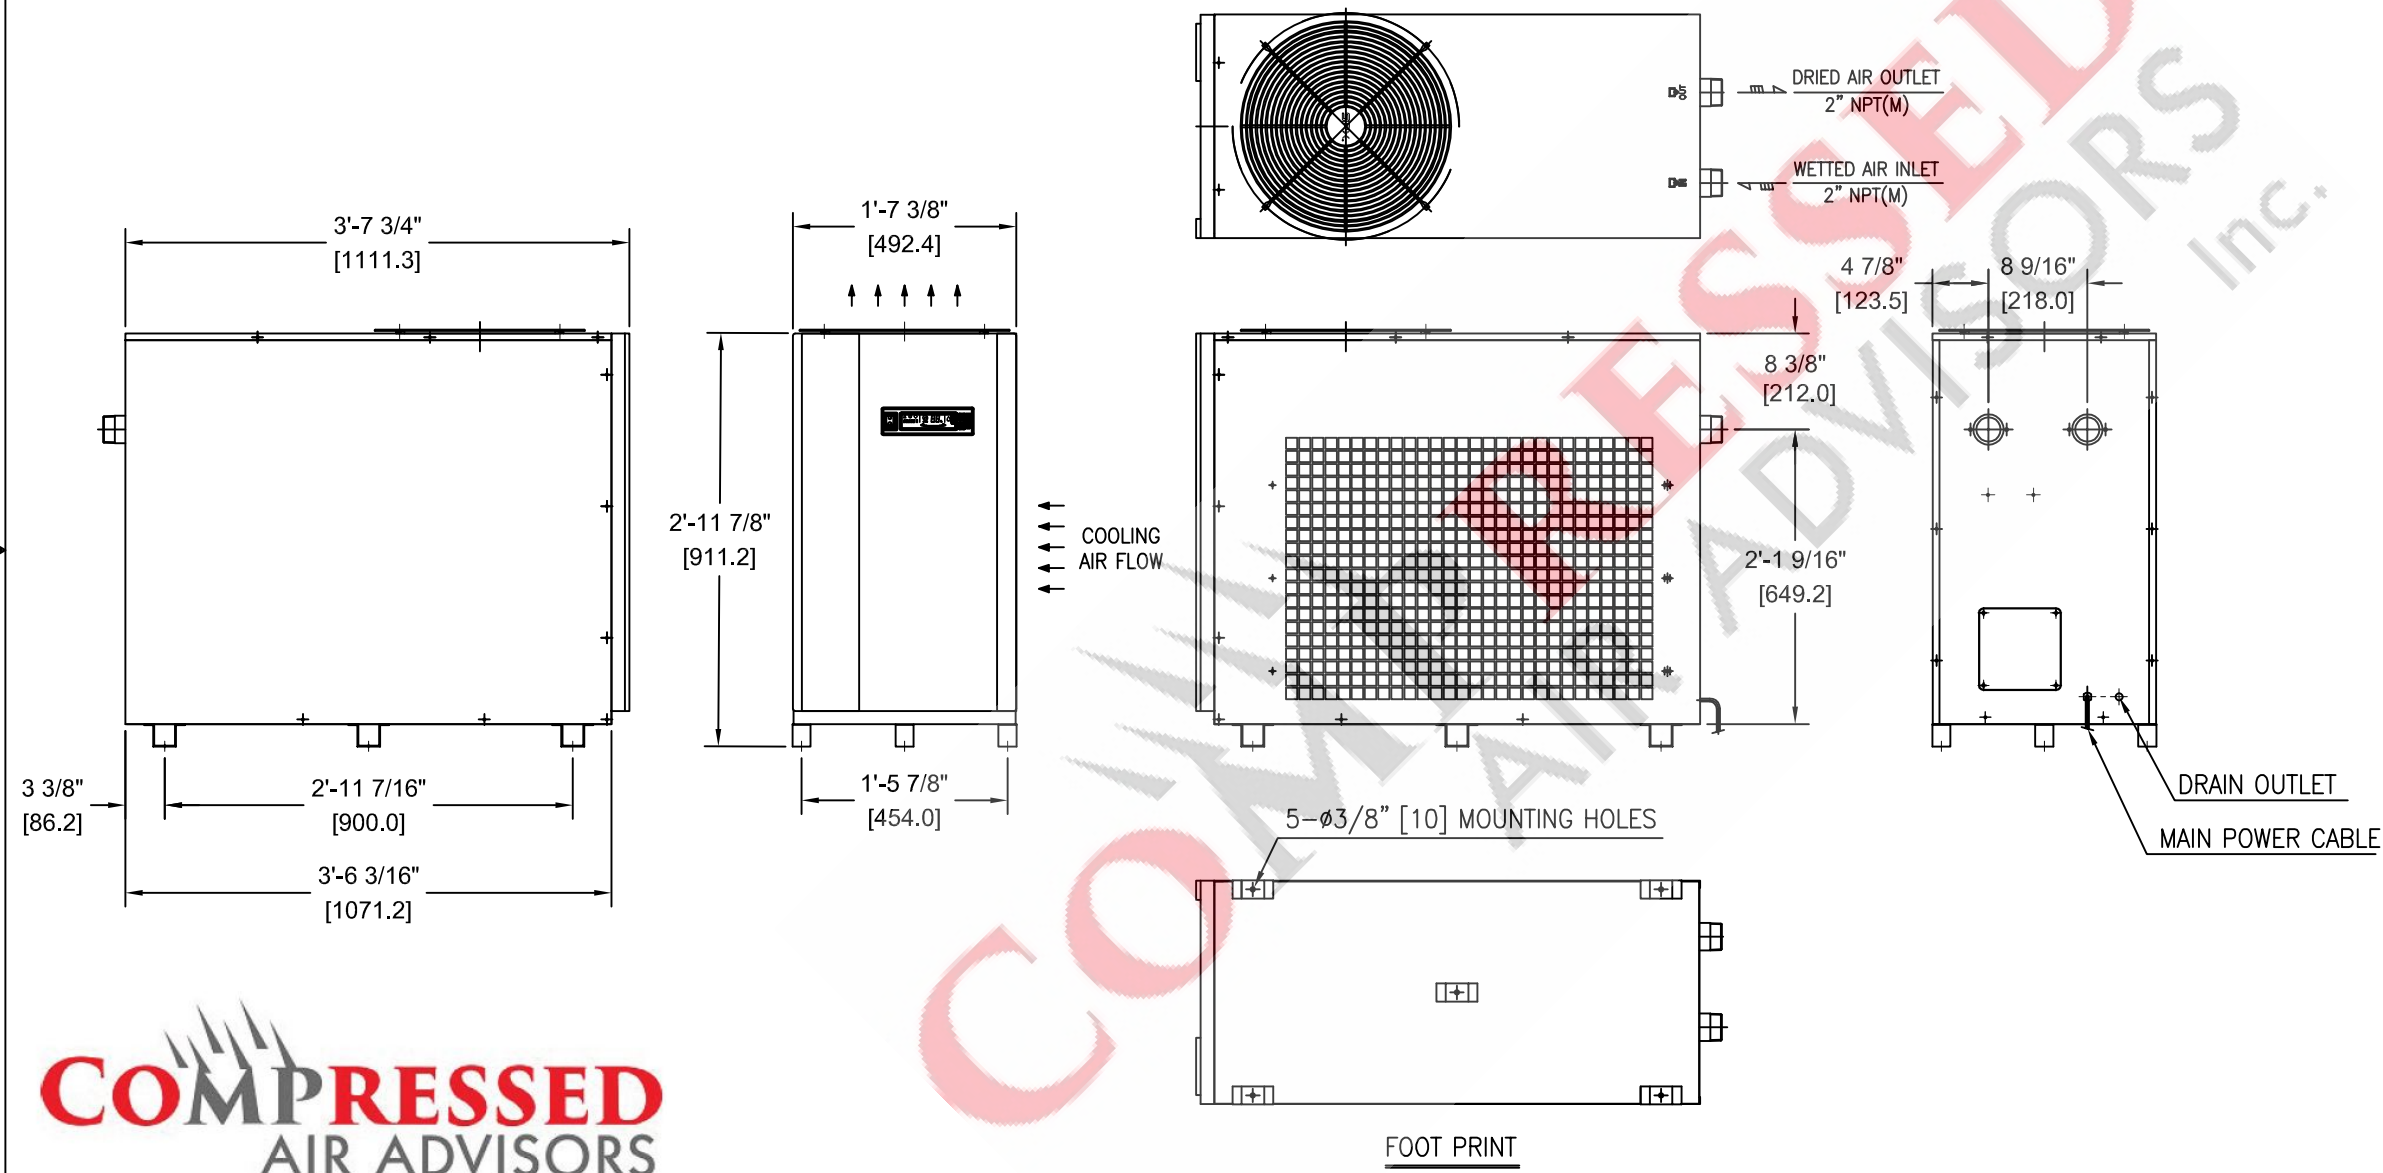

**SERVICE :**  
 COMPRESSED AIR

**OPERATING CONDITIONS :**  
 AIR INLET FLOW RATING- 400 SCFM (4.1) & 450 SCFM (4.5)  
 RATED INLET AIR PRESSURE- 100 PSIG  
 MAXIMUM INLET AIR PRESSURE- 232 PSIG  
 MINIMUM INLET AIR PRESSURE- 43.5 PSIG  
 RATED INLET AIR TEMPERATURE- 100°F  
 MAXIMUM INLET AIR TEMPERATURE- 122°F  
 MINIMUM INLET AIR TEMPERATURE- 39°F  
 RATED AMBIENT AIR TEMPERATURE- 100°F  
 MAXIMUM AMBIENT AIR TEMPERATURE- 113°F  
 MINIMUM AMBIENT AIR TEMPERATURE- 36°F

**SPECIFICATIONS:**  
 CONDENSER TYPE- AIR COOLED  
 POWER SUPPLY- 230V/1PH/60Hz (4.1) &  
 460V/3PH/60Hz (4.5)  
 DRAIN TYPE- ELECTRONIC AUTO DRAIN VALVE  
 EXPANSION DEVICE- CONSTANT PRESSURE EXPANSION VALVE  
 WEIGHT- 335 LBS (4.1) & 368 LBS (4.5)  
 REFRIGERANT- R-407c

NOTE: PRIMARY DIMENSIONS ARE INCHES  
 & DIMENSIONS IN BRACES ARE METRIC

**COMPRESSED AIR ADVISORS**  
 Inc.  
 Compressed Air Advisors, Inc.  
 Phone: 877.247.2381  
 info@compressedairadvisors.com  
 www.compressedairadvisors.com

REV.	DESCRIPTION	APPROVED
REVISION HISTORY ( / INDICATES LATEST REVISION)		

UNLESS OTHERWISE SPECIFIED  
 DIMENSIONS ARE IN INCHES  
 TOL. ON FRACTIONS: ± 1/16  
 TOL. ON DECIMALS: ± .030 (2 PLACE)  
 TOL. ON DECIMALS: ± .015 (3 PLACE)  
 TOL. ON ANGLES: ± 1

THIRD ANGLE PROJECTION

DRAWN BY: DPM  
 DATE: 2/2/17  
 CHECKED BY: NLC  
 DATE: 2/2/17  
 APPROVED BY: NLC  
 DATE: 2/2/17

**Hankison®**

GENERAL ASSEMBLY  
 FLX 4.1 & 4.5

SIZE B	DWG. NO. GA03HAN-0160	REV.
SCALE: NONE	EST. WT.	SHEET 10F 1

4

3

2

1