


# GENERAL ARRANGEMENT DRAWINGS

Model HITN 125

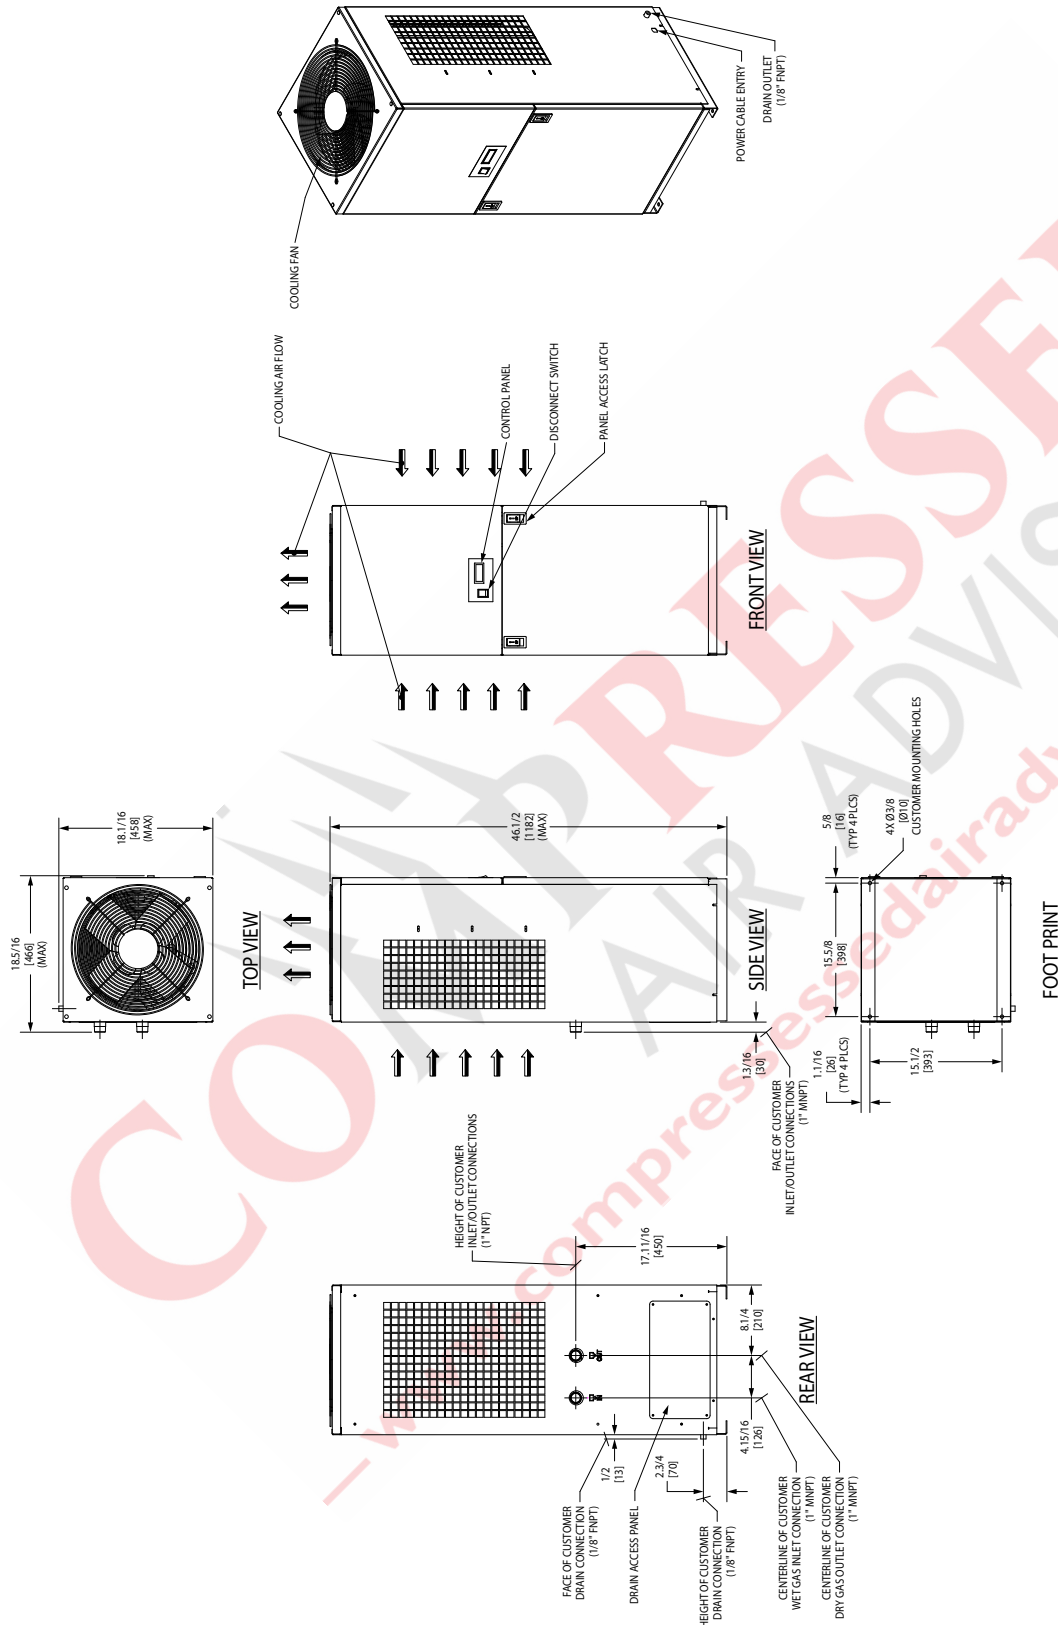

**SERVICE:** Compressed Air

**DRYER INFORMATION:**  
 Inlet Air Flow: 125 SCFM | 3.3 Nm<sup>3</sup>/min  
 Connections: 1" MNPT  
 Drain Connection: 1/8" FNPT  
 Refrigerant: R407C  
 Electrical: 230V/1PH/60HZ  
 Weight: 146.6 LBS. / 66.5 KG

- NOTES:**
1. Install in a clean, well ventilated area to reduce dirt and dust on the condenser coils.
  2. For cooling air flow and maintenance purposes, recommended clearance around unit is 2 feet (609.6 mm).
  3. Installation constraints. On-site assembly of piping, tubing and/or electrical connections, are the responsibility of the customer/owner.