


GENERAL ARRANGEMENT DRAWINGS

Model HITN 50

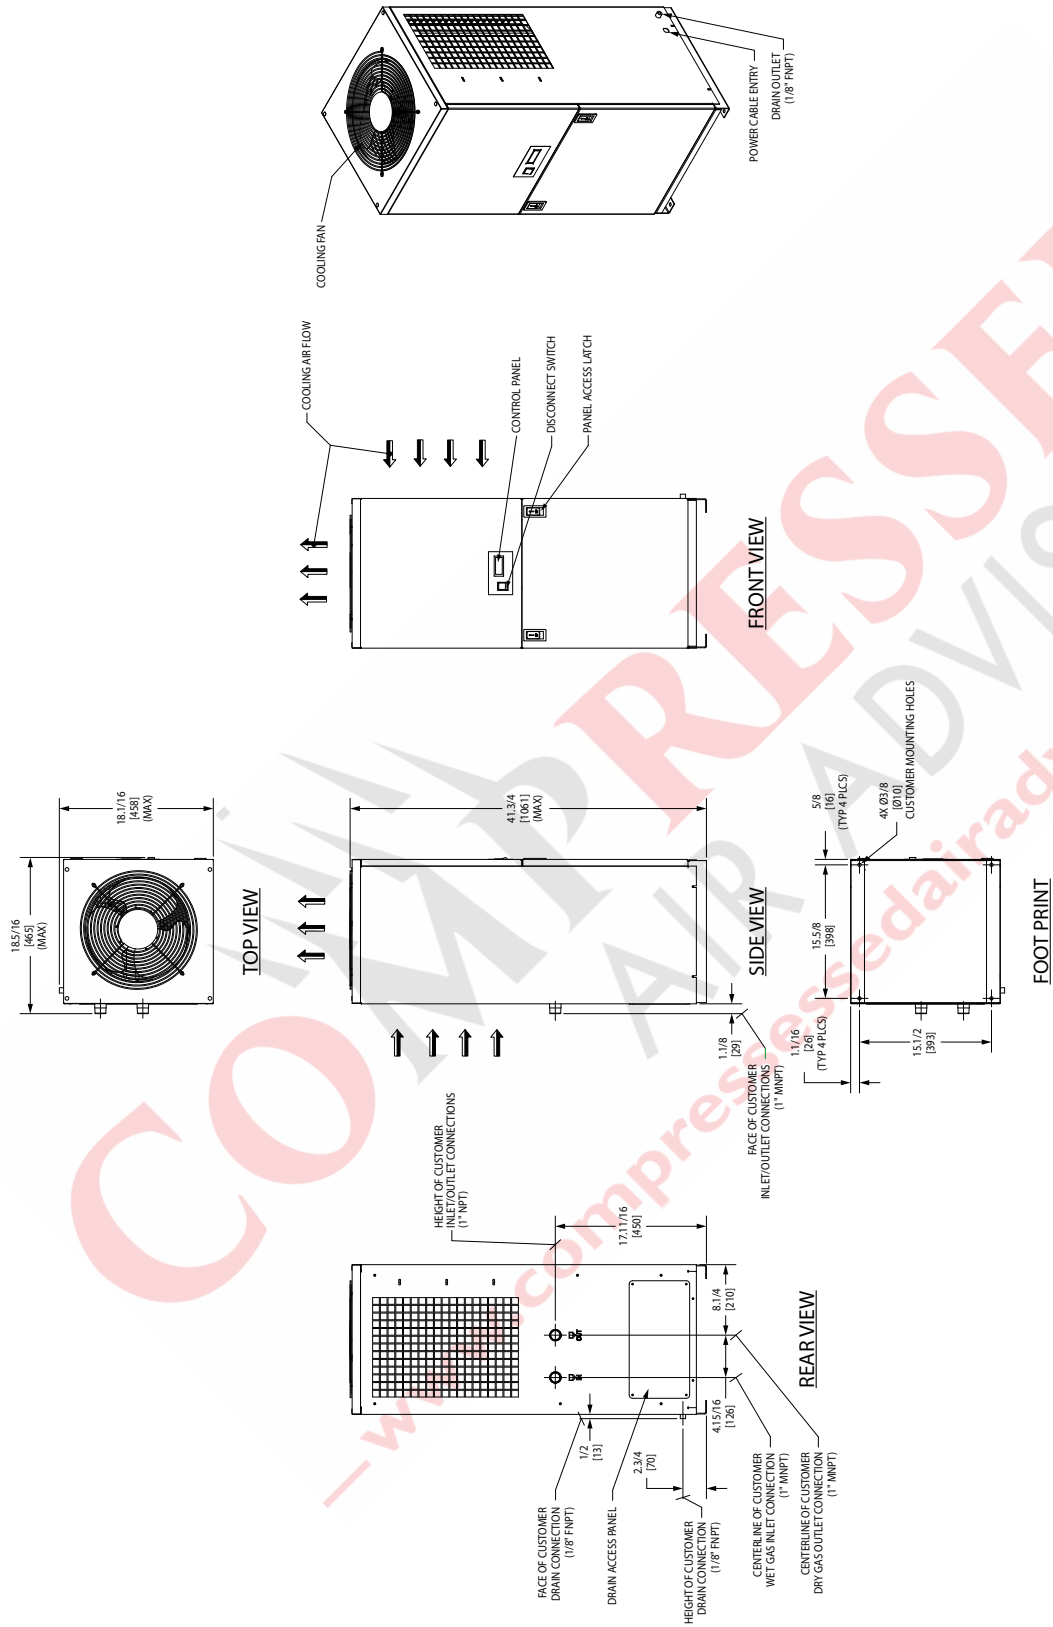

SERVICE: Compressed Air

DRYER INFORMATION:
 Inlet Air Flow: 50 SCFM | 1.3 Nm³/min
 Connections: 1" MNPT
 Drain Connection: 1/8" FNPT
 Refrigerant: R407C
 Electrical: 115V/1PH/60HZ
 Weight: 119.1 LBS. / 54 KG

- NOTES:**
1. Install in a clean, well ventilated area to reduce dirt and dust on the condenser coils.
 2. For cooling air flow and maintenance purposes, recommended clearance around unit is 2 feet (609.6 mm).
 3. Installation constraints: On-site assembly of piping, tubing and/or electrical connections, are the responsibility of the customer/owner.