


HSL-AO4-U HSL 4 channels Analog Output

Specifications

- 4-CH single-ended analog outputs
- LED indicator: Power and Link
- Slave ID consumption: 2¹
- Output range: ±12 V
- Driving capacity: ± 20 mA
- Offset error: ± 1.5 mV max
- Gain error: ± 0.1 % of max output
- D/A resolution: 16-bits
- Transmission Mode: Full / Half Duplex
- Transmission Speed: 3 / 6 / 12 Mbps
- HSL Bus max. communication time (12M / FD): 60.67 μs/command
- DAC max. update rate: 300 kS/s
- Settling time (-12V to +12V step): 10μs max
- Power supply requirement: +24V_{DC} (±10%)
- Operating temperature: 0 to 60°C
- Storage temperature: -20 to 80°C
- Power consumption: 4 W

DIP Switch Setting

➤ SW1



ON = 1	
100000	Address 1, 2
010000	Address 2, 3
...	...
011111	Address 62, 63
111111	Not used
OFF = 0	

Pin Definitions


➤ CN1

Pin #	Signal Name	Description
1	E24V	External Power, +24VDC +/-10%
2		
3	EGND	External Ground
4		
5	FG	Field Ground



➤ CN2, CN3


Pin #	Signal Name	Description
1	AO0 / AO2	Analog Output Channel 0 / 2
2	AG	Analog Ground
3	AO1 / AO3	Analog Output Channel 1 / 3
4	AG	Analog Ground




Jumper Setting

➤ JP1 (Terminator setting)


Not the last module (Default)



The last module




➤ JP3 (Transmission Speed setting)

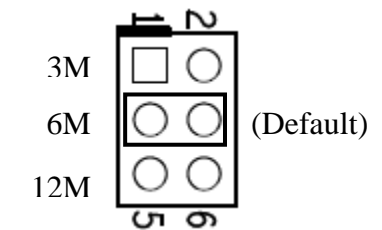


➤ JP2 (Transmission Mode setting)

Full Duplex (Default)



Half Duplex



¹ Each block of two IDs supports one module. If the slave ID of one module is set as “n”, the other should be set as “n+1”.


ADLINK on the Internet

Homepage: <http://www.adlinktech.com>
 Service: service@adlinktech.com


Copyright © 2007 ADLINK TECHNOLOGY INC.
 TEL: 886-2-82265877 FAX: 886-2-82265717
 Contents and specification subject to change without notice.
 HSL® is a registered trademark of ADLINK Technology INC. Other brands of products are trademarks or registered trademarks of their respective holders.
AM-HSLAO4-E1.00
P/N: 50-12115-1000 Rev 1.0




Dimensions

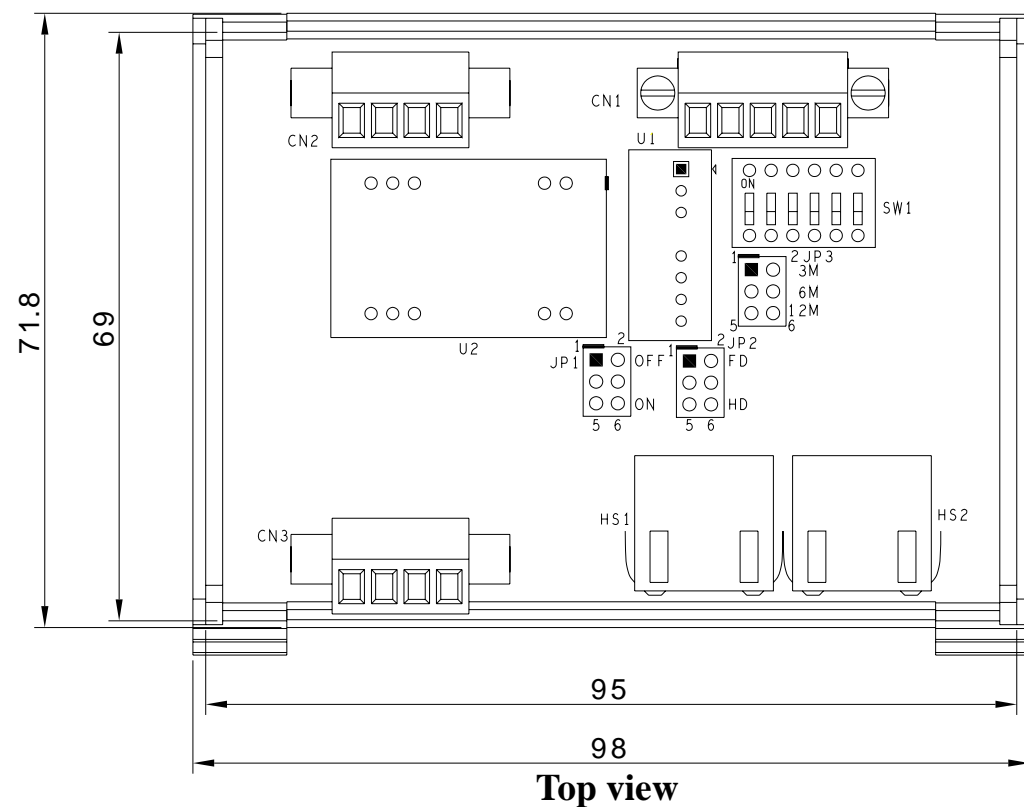

Top view

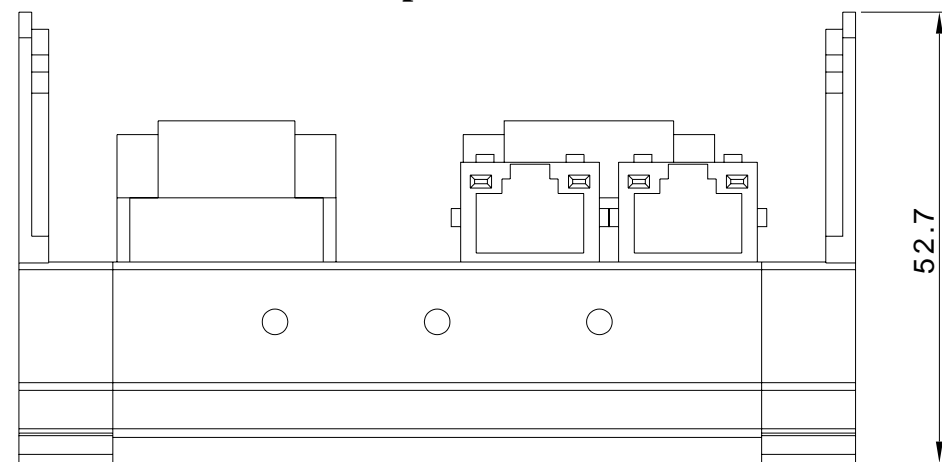

Front view

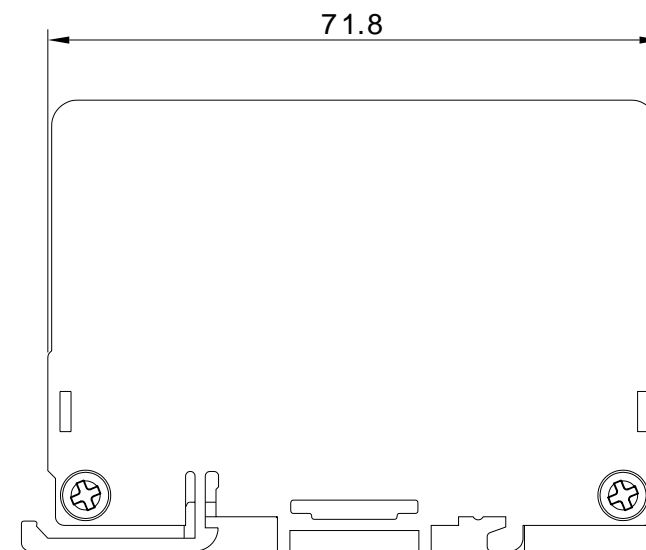

Right side view