

MODEL	DIMENSIONS													CONNECTIONS <NPT>	INLET AIR FLOW <scfm>	NET WEIGHT <lbs>	POWER SUPPLY	REFRIGERANT
	A	B	C	D	E	F	G	H	I	J	K	L	M					
HPRN600	32.25 {819.2}	21.75 {552.4}	50.44 {1281.3}	4.86 {123.5}	7.94 {201.6}	3.23 {82}	26.74 {679.2}	20.24 {514}	20.47 {520}	4.18 {106.2}	40.94 {1040}	49.26 {1251.2}	10.12 {257}	2"	600	344	460V/3PH/60Hz	R407c


NOTE: PRIMARY DIMENSIONS ARE INCHES  
& DIMENSIONS IN BRACES ARE METRIC








**SERVICE :**  
COMPRESSED AIR

**OPERATING CONDITIONS :**  
 RATED INLET AIR PRESSURE- 100 PSIG  
 MAXIMUM INLET AIR PRESSURE- 232 PSIG  
 MINIMUM INLET AIR PRESSURE- 43.5 PSIG  
 RATED INLET AIR TEMPERATURE- 100°F  
 MAXIMUM INLET AIR TEMPERATURE- 120°F  
 MINIMUM INLET AIR TEMPERATURE- 45°F  
 RATED AMBIENT AIR TEMPERATURE- 86°F  
 MAXIMUM AMBIENT AIR TEMPERATURE- 109°F  
 MINIMUM AMBIENT AIR TEMPERATURE- 37°F

**SPECIFICATIONS:**  
 CONDENSER TYPE- AIR COOLED  
 DRAIN TYPE -ELECTRONIC AUTO DRAIN VALVE  
 EXPANSION DEVICE- CONSTANT PRESSURE EXPANSION VALVE

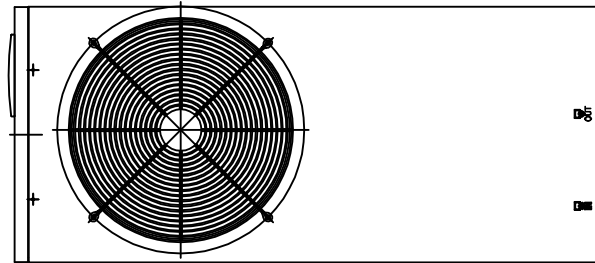

AIR OUTLET  
AIR INLET

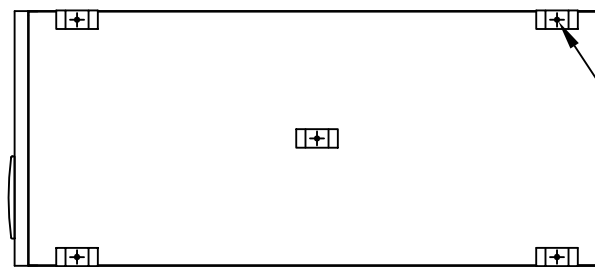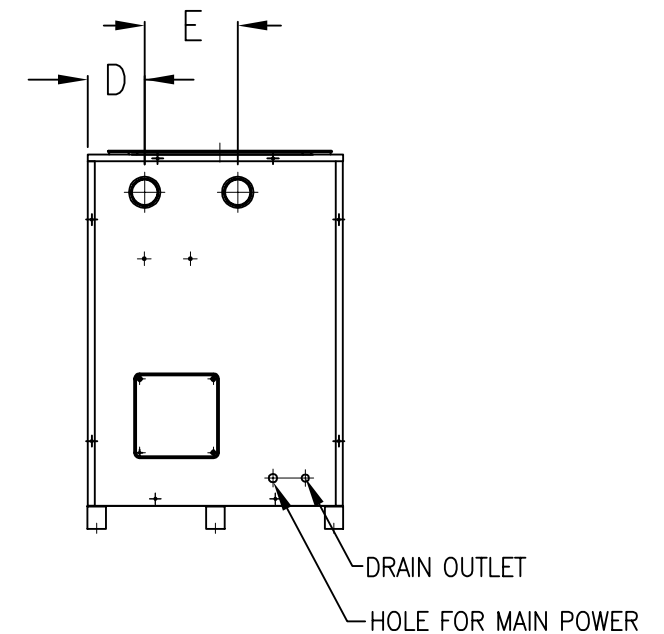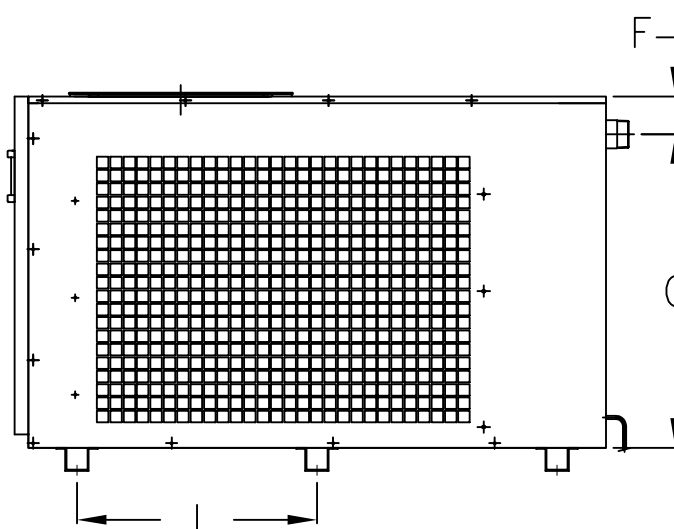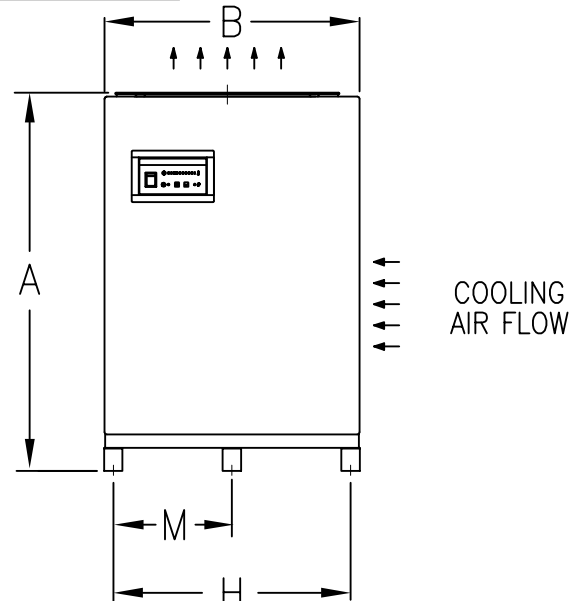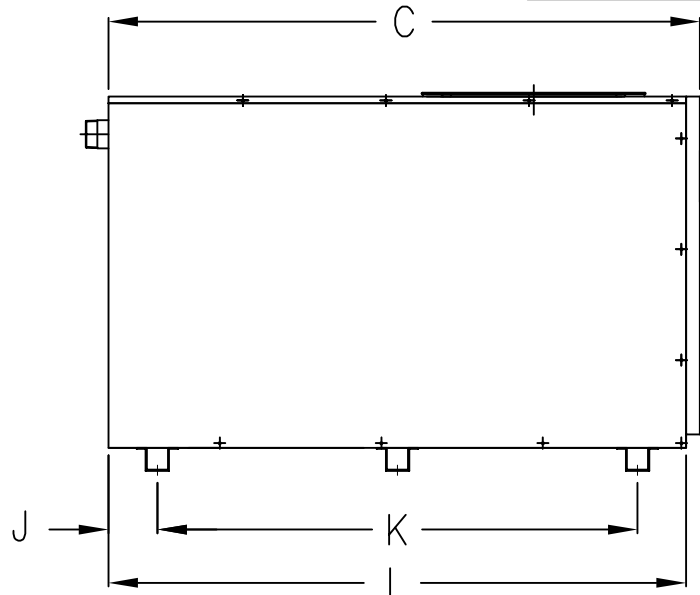

(5)0.394" {ø10} MOUNTING HOLES

FOOTPRINT

**COMPRESSED**  
AIR ADVISORS ONLINE, INC.  
YOUR COMPRESSED AIR PARTNER  
**877.247.2381**  
www.CompressedAirAdvisors.com

REV.	DESCRIPTION	BY	DATE	APPROVED
REVISION HISTORY (  INDICATES LATEST REVISION)				

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN INCHES  
TOL. ON FRACTIONS: ± 1/16  
TOL. ON DECIMALS: ± .03 (2 PLACE)  
TOL. ON DECIMALS: ± .015 (3 PLACE)  
TOL. ON ANGLES: ± 1.5

THIRD ANGLE PROJECTION

DRAWN BY: NLC  
DATE: 1/26/17

CHECKED BY: NLC  
DATE: 1/26/17

APPROVED BY: NLC  
DATE: 1/26/17

**SPXFLOW**

GENERAL ARRANGEMENT  
HPRN600 – AIR COOLED

SIZE B	DWG. NO. GA03HAN-0156	REV.
SCALE: NONE	EST. WT.	SHEET 10F 1