


- NOTES:**
1. MINIMUM CLEARANCE THAT MUST BE MAINTAINED FROM EACH SIDE OF UNIT TO ENSURE PROPER AIR FLOW AND SERVICEABILITY OF UNIT.
 2. ELECTRICAL RATINGS:
115-1-60 230-1-50/60
 3. AMBIENT TEMPERATURE:
THIS AIR DRYER SHOULD BE INSTALLED IN AREAS WHERE THE AMBIENT AIR TEMPERATURE WILL NOT DROP BELOW 35°F (2°C) OR EXCEED 110°F (43°C).
 4. MAXIMUM WORKING PRESSURE:
DRYERS HAVE AN INTERNAL AUTO DRAIN THAT HAS A MAXIMUM WORKING PRESSURE OF 175psi.
 5. UNIT WEIGHT (LBS/KG):
HIT 50 - 150 LBS/68 KG
HIT 75 - 155 LBS/70 KG

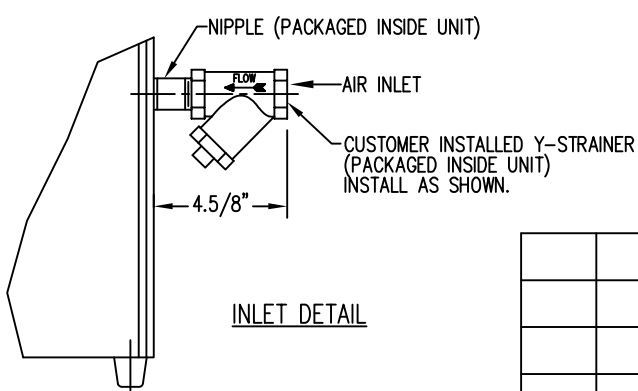

COMPRESSED AIR ADVISORS
Inc.
Compressed Air Advisors, Inc.
Phone: 877.247.2381
info@compressedairadvisors.com
www.compressedairadvisors.com

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOL. ON FRACTIONS: ± 1/16" TOL. ON DECIMALS: ± .030" (2 PLACE) TOL. ON DECIMALS: ± .015" (3 PLACE) TOL. ON ANGLES: ± .5°	FILER NO.		SPX DEHYDRATION & PROCESS FILTRATION NEWPORT, NC 28570-9169 U.S.A.	
						DRAWN BY: MPK DATE: 02-26-07			GENERAL ARRANGEMENT REFRIGERATED AIR DRYER HIT 50-75
					THIRD ANGLE PROJECTION		CHECKED BY: DWC DATE: 02-27-07		
REV.	DESCRIPTION	BY	DATE	APPROVED	APPROVED BY: JRL DATE: 02-27-07		SIZE B	DWG. NO. GA03HAN-0126	REV.
REVISION HISTORY (△ INDICATES LATEST REVISION)					SCALE: NONE		EST. WT.	SHEET 1 OF 1	