

365-Day Annual Timer

SA-027HQ

Features:


- Two N.O. or N.C. Form C relays 10A@14VDC
- Each relay can be programmed for 50 events, for a total of 100 individual programmable events
- Events can be set weekly, daily or hourly, over the course of an entire year
- Manual operation of relays without event programming
- One egress input per relay (2 total)
- Block programming allows events to be repeated
- First-person-in function interrupts the timer's normal operation
- Event outputs can be programmed disable, ON, OFF, shunt, or momentary (1-99 seconds)
- 10 Programmable holidays
- Password-protected programming
- Tandem mode allows both relays to operate simultaneously
- EEPROM Memory for data protection in case of power failure
- Built-in clock backup battery
- Built-in clock backup battery charger for external backup battery use
- Compensates for leap years
- Can be set for Standard or Daylight Saving Time
- Alphanumeric backlit LCD display for easy programming



Specifications:

| | | |
|---------------------------------|--|--------------|
| Input Voltage | 12~24 VDC/VAC | |
| Number of relays | 2 | |
| Relay rating | 10@14VDC | |
| Current draw | 70mA | |
| Number of programmable events | 50 for each relay, 100 total | |
| Blue LED | ON | Power is ON |
| | OFF | Power is OFF |
| Number of programmable holidays | 10 | |
| Battery charging current | 90mA | |
| Security code | 4-digits, numeric, ON/OFF | |
| Dimensions | 4 ³ / ₁₆ "x3 ¹ / ₁₆ "x1 ¹ / ₄ " (107x78x31 mm) | |
| Weight | 5.8-oz (164g) | |

Overview:

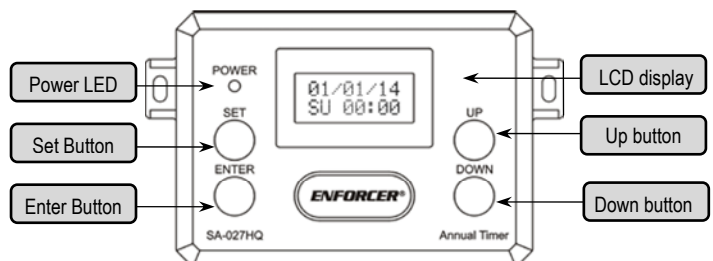

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



Copyright © 2020 SECO-LARM U.S.A., Inc. All rights reserved.
 All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners.
 The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI®

PI_SA-027HQ_191206.docx