

## LD3-30500

DALI PWM Dimming Decoder/Driver

DALI PWM Dimming  
Decoder/Driver

LD3-30500

### Product Features

- Use with DALI controller.
- PWM Output Current 5A/CH MAX.
- DALI digital control input, dimming control LED modules.
- Addressable output channels.
- Dimming range is 0-100% (LED brightness starts up at 1%).
- Works with DC power supply.
- Over-heat protection.
- Safety Class 2.
- 3-Channel 12-24VDC constant voltage output.



### Technical Specifications

Parameter	Min. *	Nom. *	Max.	Unit
Input Voltage Range	12	-	24	Vdc
12-24V DC Output Current	-	-	5	A/ch
Output Power	-	-	-	W/ch
Output Voltage	12	-	24	Vdc
Output Current	-	-	5	A/ch
Peak Current	-	-	6	A/ch
Dimming Control (DALI)	-	IE62386	-	-
Case Temperature	-	-	70	°C
Ambient Temperature	-20	-	50	°C

**Notes:**

1. Protection: short-circuit protection, overload protection, overheat protection.
2. \*Valid at temperature of 25°C.


# LD3-30500

## DALI PWM Dimming Decoder/Driver

DALI PWM Dimming  
 Decoder/Driver

LD3-30500

### Dimensions

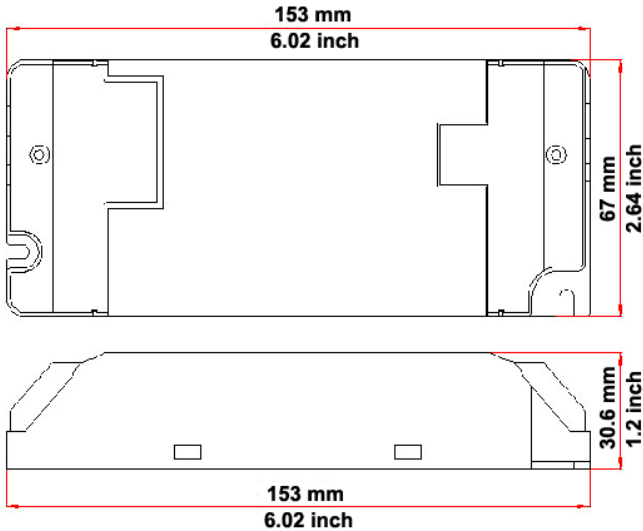

### Connection Instructions



⚠ Installation Notes:

- 1) Review the connection diagram carefully before installation.
- 2) Use either DALI controller input or a compatible touch dimmer to control the LED lights. Do not use simultaneously.
- 3) Use 16-20 AWG wires and trim end 1/4 - 3/8 inch.
- 4) Press the cap down and insert wire then release cap.
- 5) Double-check all connections prior to powering up.

# LD3-30500

DALI PWM Dimming Decoder/Driver

DALI PWM Dimming  
 Decoder/Driver

LD3-30500

## DALI Connection Diagram

