

# LD4-10035

## DALI PWM Dimming Decoder/Driver

### Product Features

- Use with DALI controller or compatible touch dimmer.
- DALI digital control input, dimming control LED modules.
- Addressable output channels.
- Dimming range is 0-100% (LED brightness starts up at 1%).
- Works with DC power supply.
- Over-heat protection.
- Safety Class 2.
- 1-Channel 350mA constant current output.
- Works with lights of 1W x 3~12 LED.




### Technical Specifications

Parameter	Min. *	Nom. *	Max.	Unit
Input Voltage Range	12	-	48	VDC
Power Factor@12-48VDC	90	92	-	
Output Current	0	330	350	mA
Peak Current		<500		mA
Output Voltage	9	9-40	40	V
Output Power (1 Channel Pout Total)	10.1	3- 12	13	W
Dimming Control (Dimmer)	IE62386			
Case Temperature	-	-	70	°C
Ambient Temperature	-20	-	50	°C

**Notes:**

1. Protection: overheat protection.
2. \*Valid at temperature of 25°C.


### Dimensions

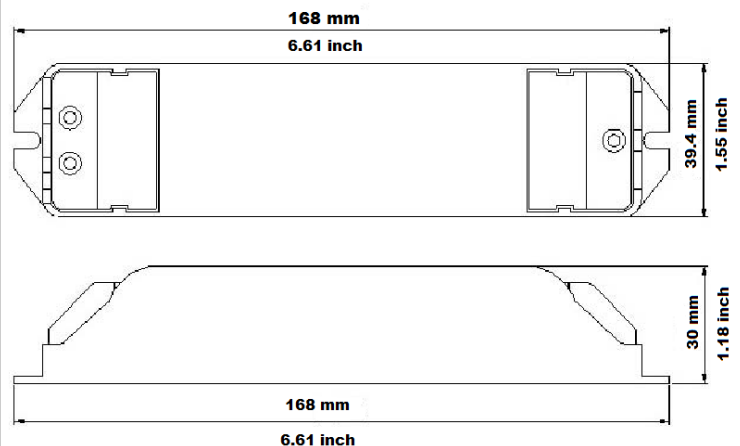

# LD4-10035

## DALI PWM Dimming Decoder/Driver

### Connection Instructions

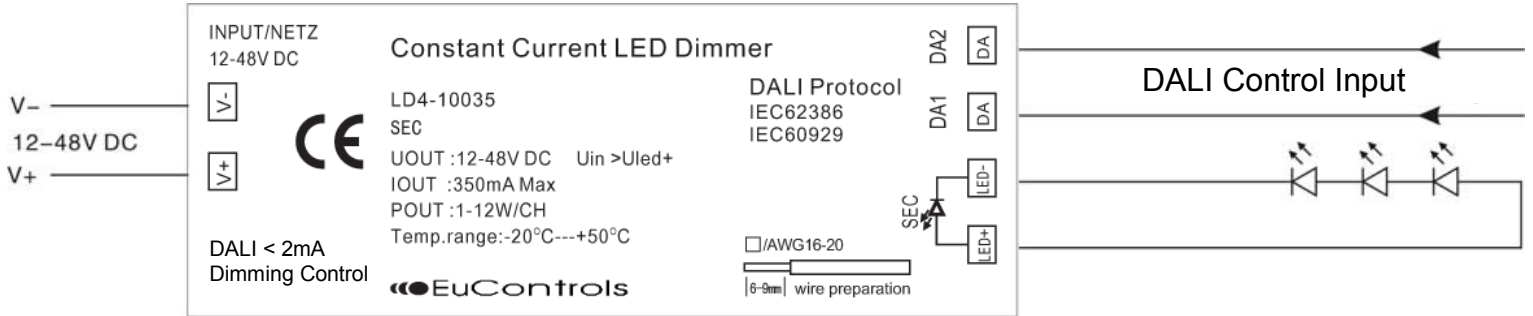

#### Installation Notes:

- 1) Review the connection diagram carefully before installation.
- 2) Use either a DALI controller input or a compatible touch dimmer to control the LED lights. Do not use simultaneously.
- 3) Use 16-20 AWG wires and trim the end 1/4 - 3/8 inch.
- 4) Press the cap down and insert the wire then release the cap.
- 5) Double-check all connections prior to powering up.

### DALI Connection Diagram

