

hugolog

USER MANUAL

R6 INDOOR SECURITY CAMERA



PRODUCT WARRANTY CARD

Your Hugolog product is protected by a 1-year warranty from the purchase date. For more information on repairs, exchange, and other policies, please visit www.hugolog.com

Please send all inquiries through the Contact Form on our website or email us at support@hugolog.com. And our technicians would be glad to assist you.

Telephone: +1(213) 992-4747



For more setup instructions and video tutorials, please scan the QR code on the left or visit: www.hugolog.com/pages/9

hugolog

CATALOGUE

002	WHAT'S IN THE BOX
003	APP SET UP
007	FCC COMPLIANCE
008	LIVE VIEW & PLAYBACK
011	MORE FUNCTIONS
012	INSTALLATION
012	ALEXA SET UP(Optional)
020	TROUBLESHOOTING
022	MOTION DETECTION
023	OTHERS
024	CUSTOMER SERVICE
025	PARAMETER
Back over	PRODUCT WARRANTY CARD

PARAMETER	
Camera	35R
IR Distance	3.6mm FOV 105°
Lens	IR Cut Filter with auto switch
Day & Night System	High-Performance Embedded SOC Processor
Processor	Built-in Omni-direction microphone
Audio	Built-in loudspeaker
Input	1-25fps adaptive frame rate of network transmission
Output	WDR
Video	Interface
Frame Rate	Hugolog Cloud Storage
WDR	Interface
Cloud Storage	Local Storage
Interface	Micro SD Card (Max.128G)
Local Storage	Max. 2.5W
Power Supply	Operating conditions
Power Consumption	-14°F ~ 122°F (-20°C ~ 50°C) Humidity 80% or less (non-condensing)
	SV DC 1A

hugolog


CUSTOMER SERVICE

LIVE CHAT:
In Hugolog Connect APP or on hugolog.com


Email: support@hugolog.com
Our professional technicians are committed to reply all your requests within 24 hours

If you purchased from Amazon, you can also contact our professional customer service team in your Amazon account


Telephone:
+1(213) 992-4747

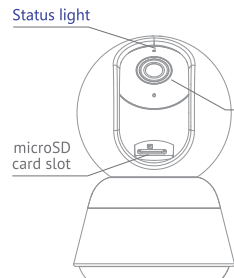


Status light

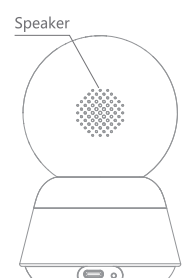


Speaker




microSD card slot



Lens



Power




Reset


Power	DC5V±10%
Status light	<ul style="list-style-type: none"> Flashing slowly: awaiting WIFI connecting. Flashing rapidly: currently connecting/ the network is abnormal. Solids on: camera running correctly.
Microphone	Capture sound for your video
SD card slot	Support local SD Card storage (Max.128G)
Reset	Press and hold the "RESET" for 5 seconds with pin to reset the device(Camera will, return to factory default settings)


hugolog


WHAT'S IN THE BOX


PLEASE CONSULT THIS CHECKLIST FOR ALL PARTS.















OTHERS


WHAT CAN I DO IF THE IMAGE IS NOT CLEAR?

- The camera is equipped with Ultra HD lens and sensor to produce superior image, however the image quality may be affected by the lighting condition
- Ensure the camera is NOT facing to environment with poor lighting condition to bring bright lighting sources such as sun light.
- Ensure your phone and your router has enough bandwidth to stream HD video. A minimum of 2Mbps is required to stream each camera. If the network does not meet this requirement, the live view stream will be downgraded to SD automatically

NIGHT VISION

- The camera is equipped with infrared LED technology to capture black and white night vision image in detail at night. However, the night vision image quality may be affected by the following factor.
- There are high contrast light sources such as car headlight pointing to the camera







hugolog

APP SET UP


- Connect the camera to power via included USB Charger. If you are not setting up the camera for the very first time, press and hold the "Reset" for 5 seconds until you hear a beep.

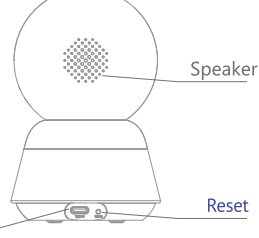

Speaker




Power




Reset


- Please download the Hugolog Connect App from the App Store or Scan the QR code below. Hugolog Connect APP is available for both iOS and Android OS. Search the name "Hugolog Connect" in App Store or Google Play(The other Hugolog apps, such as Hugolog do NOT support)




Hugolog Connect




GET IT ON Google Play





Download on the App Store



hugolog

WHAT CAN I DO IF THE CAMERA IS OFFLINE?

- Make sure your home Wi-Fi is working. Check other devices connected to the same Wi-Fi and see if they can use the Internet.
- Check if your Wi-Fi name or password has been changed by your family and you do not know. If yes, please reset the camera and set it up all over again.
- If the Internet works well and the camera still shows offline, please restart your router, wait for 2-3 mins and see if the camera will be online automatically. Sometimes when the router is overloaded, the camera will be offline.
- Check the indicator of the camera. If the camera shows solid blue when it is online, now there is no light, maybe the power cable is defective. You could change the cable, restart the camera, and check.

Check if WIFI password or router is changed. If so please reset the camera

- Ensure router is powered on and online
- Ensure camera has power
- Ensure the phone has decent network bandwidth
- Check the app is on latest version

Register

United States of America

Email

Get Verification Code

I Agree User Agreement and Privacy Policy

hugolog

TROUBLESHOOTING

IF YOU CANNOT CONNECT THE CAMERA TO THE INTERNET, CHECK THE FOLLOWING STEPS

- Ensure you are connecting to a 2.4GHz WiFi not 5GHz
- Ensure WiFi password or SSID is correct
- Ensure the camera is placed as close to the router as possible
- Ensure camera is powered on and the indicator is blinking rapidly before scanning the QR code
- Ensure you are using the correct APP (Hugolog Connect)
- Ensure the camera is scanning the QR code on the phone in the correct way
- If the above doesn't help, reset the camera and start pairing again or you can find us at support@hugolog.com


WHAT CAN I DO IF THE CAMERA STOPPED WORKING?

- Close the APP and Restart the APP again


Network setup

Option 1: Bluetooth Network Setup (Requires Bluetooth permission to the Hugolog Connect App)

The App will automatically search for nearby devices and display a quick network setup window. Click the "Add" button, confirm that the network you are connecting to is a 2.4GHz WiFi, and enter the correct password and user name, click the "Next" button, the camera will start pairing.



Devices to be added 1



Living Room

Option 2: QR Code Network Setup (camera scan the QR code displayed on your phone)

If Option1 doesn't work, please click the "+" sign to add the camera. Continue to click "Video Surveillance" > "R6-2.4GHz"

Confirm that the network you are connecting to is a 2.4GHz WiFi, enter the correct password and user name, and click "Next" to generate a QR code that carries the Wi-Fi information. Use the camera to scan the QR code on the phone. Press "1 Heard a Prompt" after the camera reads the QR code and beeps. Then the camera will start pairing.

hugolog

LIVE VIEW & PLAYBACK

1. This Camera only works with 2.4GHz Wi-Fi, 5GHz Wi-Fi is not supported!


2. Please put the camera near to the router during setting up the camera, after connection succeed, you can place the camera in another place.

Note: Put the camera close to the router(3 feet) during setting up the camera.

If the pairing is not successful, press the Reset button for 5 seconds until you hear a prompt and start again. Or check the FAQ section for more troubleshooting steps

If you encounter any issues during use, please feel free to contact us: support@hugolog.com

You can now tell your Echo device to show the camera feed by calling "Alexa, Show Baby Room." You can change and update the camera name in the Hugolog Connect APP camera menu. (Refer to Step 3)



"Alexa, show me the baby room"

hugolog

FCC COMPLIANCE

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:


- This device may not cause harmful interference.
- This device must accept any interference received, including interference that may cause undesired operation.

The manufacturer is not responsible for any interference received, including interference that may cause undesired operation. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.


RF warning statement: To maintain compliance with FCC's RF exposure guidelines, this equipment should be installed and operated with a minimum distance of 20 cm between the radiator and your body.

Tap 'DISCOVER DEVICES'



Wait until the Alexa APP discovers the Hugolog camera. Check the following if Alexa repeatedly fails to discover the camera.

- Ensure the Hugolog Connect camera, the Alexa device and your phone are connected in the same Wi-Fi network.
- Ensure the Hugolog Connect camera is powered on and set up in the Hugolog Connect APP
- Ensure the Alexa device, such as Echo Show, is set up and connected.
- Ensure the camera is added to the Hugolog Connect account that is linked to the Hugolog Connect Skill in the Alexa APP




Alexa is looking for devices to connect...
This may take up to 45 seconds.

hugolog

LIVE VIEW & PLAYBACK


Tap 'Authorize'

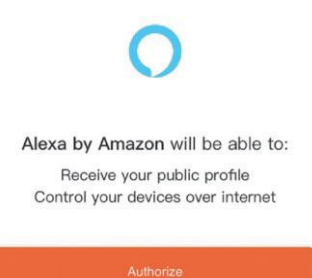

Alexa by Amazon will be able to:
Receive your public profile
Control your devices over internet

Authorize

Tap 'Done' after the Hugolog Connect APP is linked to the Hugolog Connect Skill.

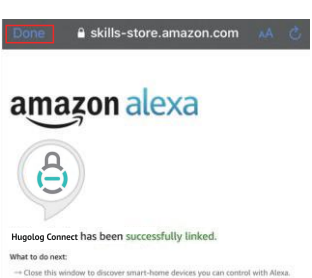


Hugolog Connect has been successfully linked.
What to do next:
*Click the camera to discover what items the camera can control with Alexa.


hugolog

ENABLE TO USE

Tap 'ENABLE TO USE'

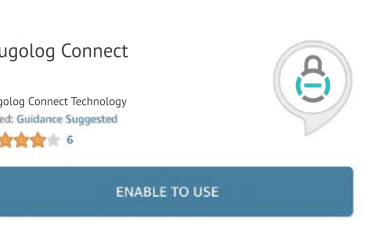

Log in to your Hugolog Connect APP account and tap 'Link Now'

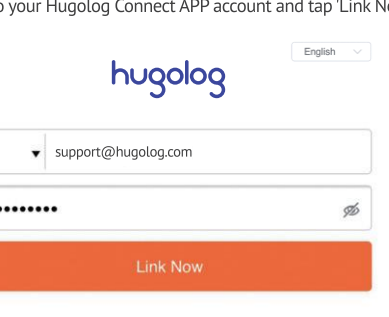

- Camera Name
- Switch Video Quality
- Time Stamp
- Edit Camera Settings
- Sound Switch
- Zoom in
- Wi-Fi signal
- Enter Full Screen Mode
- Screenshot: Take a Screenshot and Save it to gallery
- Two-Way Audio: Press and Hold to Talk, Release to Listen
- Record: Record a Video Clip and Save it to gallery
- Fold/Unfold the function bar
- Playback: Watch the videos saved on the Micro SD Card
- Gallery: The folder where screenshots and videos are saved
- Night mode:
 - Auto: Automatically switch to infrared mode at night or when the ambient light source is dark, and automatically turn off when the ambient light source is bright enough.
 - Color Mode: The camera is equipped with starlight technology to capture pictures and events at night clearly without additional light source.
 - Black & White mode: In this mode, the camera will always presents black and white night vision mode.

hugolog

LIVE VIEW & PLAYBACK

Private Mode: Private mode means the camera will turn off and all the features cannot be used. Turn on this function, both the sharer and the user cannot view the camera any more. When you don't need the camera to work and don't want to plug off it, you can use the private mode.

Motion Detection: Receive push notification when motion is detected

Siren: When you perceive danger, you can turn on the siren at any time to expel possible dangerous factors

Motion Tracking: Automatically tracks when objects move.

Sound Detection: Receive push notification when sound is detected.


Messages: Alarm notifications

Direction: Pan-Tilt control


Site: Save the current view as a site easily with 'Site Added Successfully', or use the 'Direction' button to adjust the camera angle and add your desired target point as a site (up to 6 site settings supported). To quickly confirm the safety of the target location, simply click on the saved site and the camera will automatically rotate to your saved view.

Cloud: Watch the videos saved on the Cloud Server (Subscription Required)

Tap the Menu icon and choose 'Skills & Games' in the Alexa APP

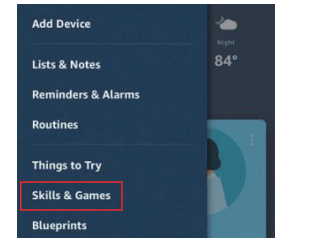

Search 'Hugolog Connect' and choose the 'Hugolog Connect' skill. (Not Hugolog)

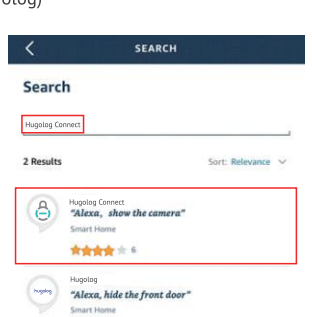

hugolog

MORE FUNCTIONS


Enter the setting interface of serial number 4

BASIC FUNCTION SETTINGS

- Status Indicator: Switch camera's status indicator
- Flip Screen: Flip the live view screen
- Watermark: Switch the brand watermark of live view
- Wide Dynamic Range: In photography, videography, and image processing, WDR refers to the ability of a camera or display device to capture or display images or video with a wide range of brightness. It can handle bright and dark areas at the same time, making details more clearly visible.
- Talk Mode: Switch to select One-Way Communication or Two-Way Talk mode.
 - One-Way Communication: Hold the talk button to talk
 - Two-Way Talk: Tap the talk button on the panel to start talk
- Camera calibration: The camera automatically performs a calibration function to account for some rotation problems.

OTHER FUNCTIONS

- Offline Notification: You will be notified if the camera is offline.
- Visit FAQ Articles: Display common problems to help you troubleshoot problems quickly
- Share Device: You can share this camera with others so that they can watch the camera as well.
- Put to Home Screen: Put this camera on the phone's home screen so that you can watch it more quickly.

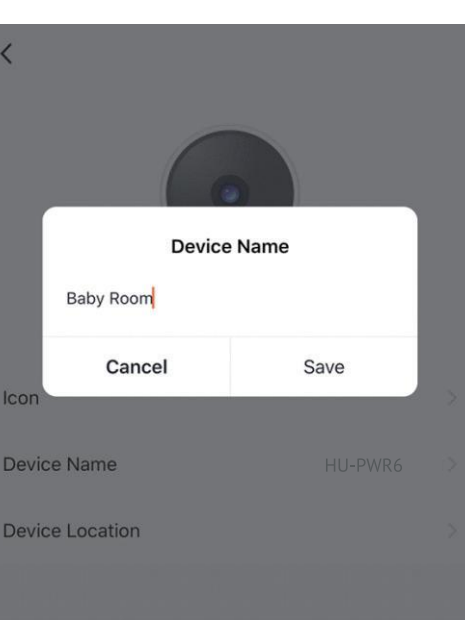

hugolog

INSTALLATION

FIND A GOOD MOUNTING SPOT


- Use the Real-Time Rate (RTMR) in the APP live view screen to test the Wifi signal strength. Move the camera as close to the router as possible if the Real-Time Rate is poor

ALEXA SET UP (Optional)

BEFORE YOU START

- Download and Install Amazon Alexa APP on Your Phone
- Log in the Alexa APP with Your Amazon Account
- Set up Your Alexa Device
- Ensure Your Hugolog Connect Camera is Powered on and Online in the Hugolog Connect APP

In the Hugolog Connect APP, go to the camera you are setting up, and tap the 'Edit' button to enter the camera menu.



Tap the camera model number or camera name

