


CQSA 1024

USB to DMX Stand Alone Interface



A versatile DMX controller that provides powerful Stand Alone mode triggering capabilities, making it suitable for a wide range of project and installations.

Compatible with all Chromateq software, it can be integrated into scalable control systems designed for live performance or fixed installation, or deployed individually without a computer as an elegantly simple but sophisticated standalone control solution.

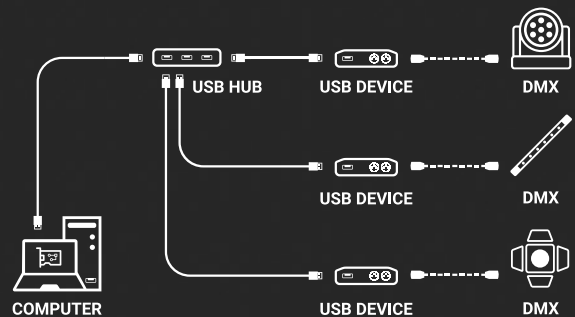


10th
YEAR
ANNIVERSARY

↓
FREE

DESIGNED & DEVELOPED
IN FRANCE

5
YEAR
WARRANTY

CHROMATEQ

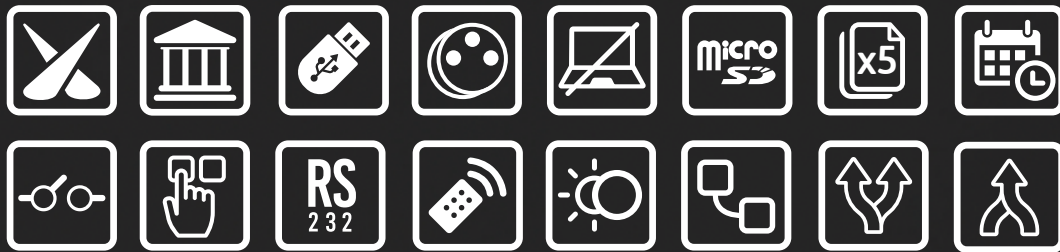

HARDWARE Options

DMX Output	2x512 or 1024 In/Out channels PC and Stand Alone
Multiple Zone	5 Zones, play up to 5 different scenes/sequences at time in Stand Alone
Memory	Micro SD Card (all FAT format, up to 256 GB) + Internal memory (No SD card required)
DMX Modes	DMX In/Out, DMX Splitter, DMX Merge, DMX Record, DMX Trigger
RS232	Can receive triggers from RS232 devices (16 characters max)
Stand Alone Options	6 selectable modes: Buttons (8), Pages (10), Zones (5), Colour (99 RGB + 8 RGBW), Commands from the Contacts (Speed, scene, dimmer, zone) Time Clock setting adjustable in Stand Alone. 16-bit and fine channel management Automatic Scene Recovery if the power is cut off Cross Fade time between scenes Turn Off display after 4s, Default start scene, Dimmer and RGB color selection Master/Slave mode with Up to 32 devices combined and synchronized (64 universes)
Triggers (Stand Alone)	8 Buttons with blue status LED, 10 pages Real Time Clock and calendar for each scene (Hour, Day, Week, Month, Year) 7 Dry Contacts on 3~5V (On, On/Off, Release, Restart, Scene Priority, 127 contacts max) Can command the device from the Dry Contacts Can receive RS232 trigger commands in Live and Stand Alone (16 characters max) DMX input (DMX signal from another DMX device) Infrared Remote, Light intensity (with optional deported PCB and remote)
Max DMX outputs (USB)	x12 USB interfaces connected = 24 DMX out max
Power	5V DC (USB), 5V to 24V - 0.2A (DC connector), 0.2W, High Voltage Protection
Dimension	H : 38mm (1.49in) / W : 166mm (6.54in) / D : 97mm (3.82in)
Housing	Black ABS Plastic with 4 mounting slots
I/O Connectors	Mini USB 2.0, 3 pin XLR (XLR5 optional)
Operating Temperature	-40 to +85 C°
IP Rating	IP40
Certifications	CE, LVD, RoHS
International Warranty	5 years



SOFTWARE Options

LED Player	Up to 64x512 DMX Outputs	<h3>FREE SOFTWARE</h3> <p>Download and Update</p> 
Pro DMX	30 minutes Audio and Video Timeline	
Pixxem	8x512 Artnet, 128x128 or 16384 Pixels	
Studio DMX	3D viewer in real time (Full mode)	
Wi-Light 2 APP	Mobile software control (Android, iOS)	
Art-Net Output from PC	2x512 DMX Outputs per connected device	
System Compatibility	Windows, iOS, Linux	
Technical support	Worldwide, English, French, Chinese	

2010 - 2021 Chromateq SARL
Chromateq - All rights reserved

191 Allée de Lauzard
34980 St Gély du Fesc, FRANCE
Web: www.chromateq.com
Email: info@chromateq.com
Phone: +33 952210755
Wechat: Chromateq
WhatsApp: +8613422062209
QQ: 2908265661

Software & App download:

Software package download: <https://www.chromateq.com>
Wi Light 2 app download (iOS): <https://apps.apple.com/us/app/wi-light-2/id1523046687?l=fr>
Wi Light 2 app download (Android): <https://play.google.com/store/apps/details?id=com.chromateq.wilight2>

PC minimum configuration:
Windows / Mac OS / Linux (Device)
2Ghz CPU, 8 Gb RAM
2Gb RAM graphic card
500 Mb disk
1 USB port (Device)
1 Ethernet Port (for Art-Net & sACN)



www.chromateq.com
Contact • Support • Download