



# SLIM 512

Wall mounted USB to DMX Stand Alone Interface



The SLIM Stand Alone interface provides a wall-mounted solution designed for indoor installations and projects requiring a user-friendly and aesthetically-pleasing lighting control panel.

Easily mounted on any surface, the control panel fits standard European and US wall plugs.

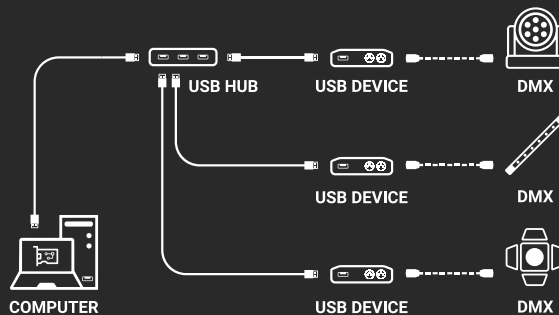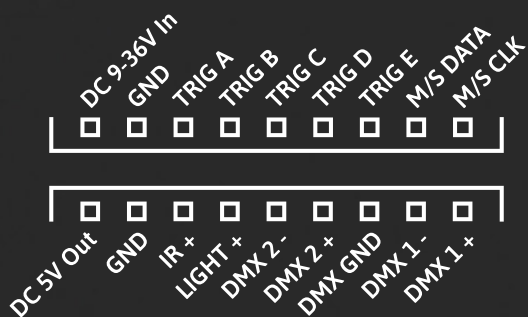


10<sup>th</sup>  
YEAR  
ANNIVERSARY

↓  
FREE

DESIGNED & DEVELOPED  
IN FRANCE

5  
YEAR  
WARRANTY

CHROMATEQ

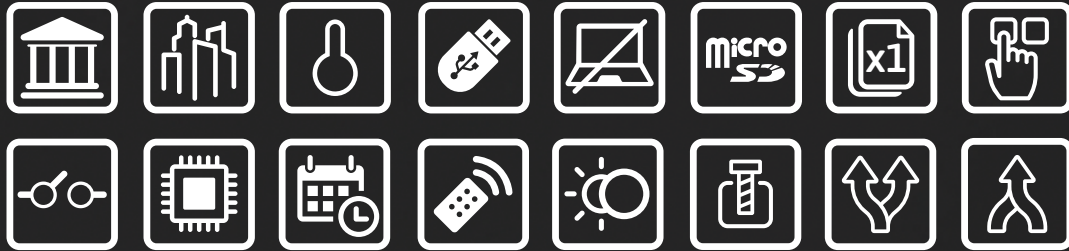


## HARDWARE Options

DMX Output	512 In/Out channels PC and Stand Alone, default 2x512 Splitter mode
Zone	1 Zone, play 1 scene/sequence at time in Stand Alone
Memory	Micro SD Card (all FAT format, up to 256 GB) + Internal memory (No SD card required)
DMX Modes	DMX In/Out (PC), DMX Splitter, DMX Merge, DMX Record
Stand Alone Options	6 selectable modes: Buttons (8), Pages (10), Zones (5), Colour (99 RGB + 8 RGBW), Commands from the Contacts (speed, scene, dimmer, zone) Time Clock setting adjustable in Stand Alone. 16-bit and fine channel management Automatic Scene Recovery if the power is cut off Cross Fade time between scenes Turn Off display after 4s., Default start scene, Dimmer and RGB color selection Master/Slave mode with Up to 32 devices combined and synchronized (64 universes)
Triggers (Stand Alone)	8 buttons with blue status LED, 10 Pages Real Time Clock and calendar for each scene (Hour, Day, Week, Month, Year) 5 Dry Contacts on 3~5V (On, On/Off, Release, Restart, Scene Priority, 31 contacts max) Infrared Remote, Light intensity (with optional deported PCB and remote)
Max DMX outputs (USB)	x12 USB interfaces connected = 12 DMX max
Power	5V DC (USB), 5V to 24V - 0.2A (screw connector), 0.2W, High Voltage Protection
Dimension	H : 38mm (1.49in) / W : 166mm (6.54in) / D : 97mm (3.82in)
Housing	Black or White ASB Plastic with mounting slots
I/O Connectors	Mini USB 2.0, Screw Terminal block 2x9 Pins
Operating Temperature	-40 to +85 C°
IP Rating	IP40
Certifications	CE, LVD, RoHS
International Warranty	5 years



## SOFTWARE Options

LED Player	Up to 64x512 DMX Outputs	<b>FREE SOFTWARE</b> Download and Update 
Pro DMX	30 minutes Audio and Video Timeline	
Studio DMX	3D viewer in real time (Full mode)	
Wi-Light 2 APP	Mobile software control (Android, iOS)	
Art-Net Output from PC	1x512 DMX Outputs per connected device	
System Compatibility	Windows, iOS, Linux	
Technical support	Worldwide, English, French, Chinese	

2010 - 2021 Chromateq SARL  
Chromateq - All rights reserved

191 Allée de Lauzard  
34980 St Gély du Fesc, FRANCE  
Web: [www.chromateq.com](http://www.chromateq.com)  
Email: [info@chromateq.com](mailto:info@chromateq.com)  
Phone: +33 952210755  
Wechat: Chromateq  
WhatsApp: +8613422062209  
QQ: 2908265661

### Software & App download:

Software package download: <https://www.chromateq.com>  
Wi Light 2 app download (iOS): <https://apps.apple.com/us/app/wi-light-2/id1523046687?l=fr>  
Wi Light 2 app download (Android): <https://play.google.com/store/apps/details?id=com.chromateq.wilight2>

### PC minimum configuration:

Windows / Mac OS / Linux (Device)  
2Ghz CPU, 8 Gb RAM  
2Gb RAM graphic card  
500 Mb disk  
1 USB port (Device)  
1 Ethernet Port (for Art-Net & sACN)



[www.chromateq.com](http://www.chromateq.com)  
Contact • Support • Download