



SLIM 1024

Wall mounted USB to DMX Stand Alone Interface



The SLIM Stand Alone interface provides a wall-mounted solution designed for indoor installations and projects requiring a user-friendly and aesthetically-pleasing lighting control panel.

Easily mounted on any surface, the control panel fits standard European and US wall plugs.

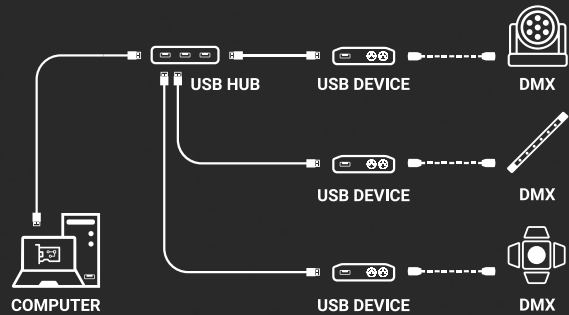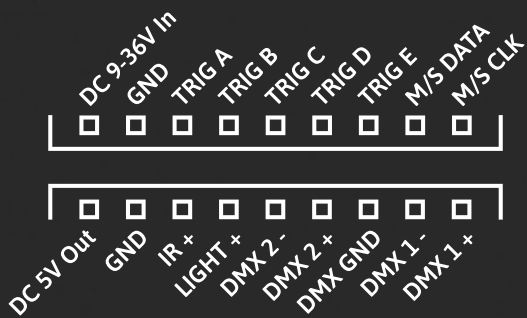

10th
YEAR
ANNIVERSARY

↓
FREE

DESIGNED & DEVELOPED
IN FRANCE

5
YEAR
WARRANTY

CHROMATEQ




HARDWARE Options

| | |
|------------------------|--|
| DMX Output | 2x512 or 1024 In/Out channels PC and Stand Alone |
| Multiple Zone | 5 Zones, play up to 5 different scenes/sequences at time in Stand Alone |
| Memory | Micro SD Card (all FAT format, up to 256 GB) + Internal memory (No SD card required) |
| DMX Modes | DMX In/Out, DMX Splitter, DMX Merge, DMX Record, DMX Trigger |
| Stand Alone Options | 6 selectable modes: Buttons (8), Pages (10), Zones (5), Colour (99 RGB + 8 RGBW), Commands from the Contacts (speed, scene, dimmer, zone) Time Clock setting adjustable in Stand Alone. 16-bit and fine channel management Automatic Scene Recovery if the power is cut off Cross Fade time between scenes Turn Off display after 4s., Default start scene, Dimmer and RGB color selection Master/Slave mode with Up to 32 devices combined and synchronized (64 universes) |
| Triggers (Stand Alone) | 8 buttons with blue status LED, 10 Pages Real Time Clock and calendar for each scene (Hour, Day, Week, Month, Year) 5 Dry Contacts on 3~5V (On, On/Off, Release, Restart, Scene Priority, 31 contacts max) DMX input (DMX signal from another DMX device) Infrared Remote, Light intensity (with optional deported PCB and remote) |
| Max DMX outputs (USB) | x12 USB interfaces connected = 24 DMX max |
| Power | 5V DC (USB), 5V to 24V - 0.2A (screw connector), 0.2W, High Voltage Protection |
| Dimension | H: 1.9 cm ; W: 12.7 cm ; L: 11 cm ; 0.2 Kgs (WALL-MOUNTED) |
| Housing | Black or White ASB Plastic with mounting slots |
| I/O Connectors | Mini USB 2.0, Screw Terminal block 2x9 Pins |
| Operating Temperature | -40 to +85 C° |
| IP Rating | IP40 |
| Certifications | CE, LVD, RoHS |
| International Warranty | 5 years |



SOFTWARE Options

| | | |
|------------------------|--|---|
| LED Player | Up to 64x512 DMX Outputs | <h3>FREE SOFTWARE</h3> <p>Download and Update</p>  |
| Pro DMX | 30 minutes Audio and Video Timeline | |
| Studio DMX | 3D viewer in real time, Full mode | |
| Wi-Light 2 APP | Mobile software control (Android, iOS) | |
| Art-Net Output from PC | 2x512 DMX Outputs per connected device | |
| System Compatibility | Windows, iOS, Linux | |
| Technical support | Worldwide, English, French, Chinese | |

2010 - 2021 Chromateq SARL
Chromateq - All rights reserved

191 Allée de Lauzard
34980 St Gély du Fesc, FRANCE
Web: www.chromateq.com
Email: info@chromateq.com
Phone: +33 952210755
Wechat: Chromateq
WhatsApp: +8613422062209
QQ: 2908265661

Software & App download:

Software package download: <https://www.chromateq.com>
Wi Light 2 app download (iOS): <https://apps.apple.com/us/app/wi-light-2/id1523046687?l=fr>
Wi Light 2 app download (Android): <https://play.google.com/store/apps/details?id=com.chromateq.wilight2>

PC minimum configuration:
Windows / Mac OS / Linux (Device)
2Ghz CPU, 8 Gb RAM
2Gb RAM graphic card
500 Mb disk
1 USB port (Device)
1 Ethernet Port (for Art-Net & sACN)



www.chromateq.com
Contact • Support • Download