
FORWARD VISION I

2916K, 2916KLH, 2936K, 2936KLH, 2946K, 2946KF, 2956K, & 2956KF SERIES **ASSEMBLY INSTRUCTIONS**

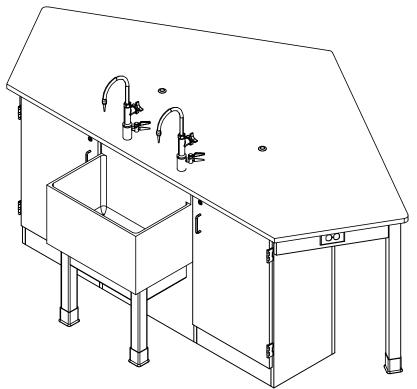

NOTE:

1. MODEL VIEWS MAY NOT REPRESENT EXACT MODEL PURCHASED

Α	CREATED DRAWING	11/2/16	EMR	-	
REV.	DESCRIPTION	DATE	NAME	ECN NO.	
REVISION LEVEL					

DWN BY: EMR 11/2/16

CONFIDENTIAL:
ALL DESIGN RIGHTS RESERVED
THE INFORMATION, DATA, DESIGN, AND DRAWINGS EMBODIED
IN THIS DOCUMENT AND ALL REPRODUCTIONS THEREOF ARE THE EXCLUSIVE PROPERTY OF DIVERSIFIED WOODCRAFTS, INC.

THESE DOCUMENTS ARE SUPPLIED WITH THE UNDERSTANDING THAT THEY WILL NOT BE DISCLOSED TO THIRD PARTIES WITHOUT WRITTEN CONSENT OF DIVERSIRED WOODCRAFTS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT WRITTEN CONSENT IS SUBJECT TO LEGAL ACTION.

300 South Krueger Street Suring, WI 54174 diversifiedwoodcrafts.com

FORWARD VISION I ASSEMBLY INSTRUCTIONS

SCALE: REVISION: 1 OF 18 REV A FORWARD VISION I NTS

TOOLS REQUIRED						
½" WRENCH						
½" SOCKET AND TORQUE WRENCH - OPTIONAL						
CONTACT CEMENT						
SCREW DRIVER						
C-CLAMPS						
SHIM STOCK (IF NEEDED)						

ASSEMBLY COMPONENTS					
ITEMS INCLUDED	PART#	PART DESCRIPTION	QTY		
ТОР	VARIES	TOP,EPOXY (SIZE VARIES W/ STYLE OF CABINET)	1		
CABINET	N/A	2946 & 2956 CABINETS - 24"W X 35"H X 15.25"D	2		
CABINET	N/A	2916 & 2936 CABINETS - 21"W X 35"H X 15.25"D	2		
REMOVABLE PANEL	N/A	2946 & 2956 REMOVABLE PANEL - 18"W X 35"H X 0.75"D	1		
REMOVABLE PANEL	N/A	2916 & 2936 REMOVABLE PANEL - 24"W X 35"H X 0.75"D	1		
BACK PANEL	N/A	BACK PANEL - 66"W X 35"H X 0.75"D	1		
SCREWS - REMOVABLE PANEL	100495	SCREW,#10X1-½ PHIL TR. SMS,ZN	6		
SCREWS - BACK PANEL	100478	SCREW,#8X1 ¼ SQ. WASHER FLAT HEAD	12		
LONG APRON	N/A	LONG APRON - 0.81"THK X 4.50"W X 49"L	2		
SHORT APRON	N/A	SHORT APRON - 0.81"THK X 4.50"W X 21.88"L	2		
BRACKET - APRON TO CABINET	100972	BRACKET, APRON TO CABINET	2		
SCREWS - APRON TO CABINET	100037	SCREW,#10X5% QUAD PNHD LUB	4		
BOLT - APRON TO CABINET	100387	BOLT, 3/ ₈ -16X1.50 HEX HEAD	4		
NUT - APRON TO CABINET	100621	NUT, 3/8 -16 HEX ZINC	4		
WASHER - APRON TO CABINET	100451	WASHER, 5/16 FLAT ZINC PLATED	4		
BRACKET - APRON TO APRON	100376	BRACKET, APRON TO APRON	1		
SCREWS - APRON TO APRON	100037	SCREW,#10X% QUAD PNHD LUB	8		

NOTE:

- 1. *XX* INDICATES ITEMS USED ONLY FOR THE DROP IN SINK UNITS.
- 1.1. EX. 2946K AND 2956K
- 2. **XX** INDICATES ITEMS USED ONLY FOR THE END SINK UNITS.
- 2.1. EX. 2916K & KLH AND 2936K & KLH
- 3. ***XX*** INDICATES ITEMS USED ONLY FOR THE LAB HAND UNITS.
- 3.1. EX. 2916KLH AND 2936KLH

Α	CREATED DRAWING	11/2/16	EMR	-	
REV.	DESCRIPTION	DATE	NAME	ECN NO.	
	PENICION LENGT				

NOTED OTHERWISE	DWN BY:	EMR	DATE DWN:	11/2/16
DECIMALS: .X = ± .030 .XX = ± .020 .XXX = + .010	APR BY:		DATE APR:	
ANGLES: = ± 1°0′ CABINET SQUARENESS = ± .0625	APR BY:		DATE APR:	

CONFIDENTIAL:
ALL DESIGN RIGHTS RESERVED
THE INFORMATION, DATA, DESIGN, AND DRAWINGS EMBODIED
IN THIS DOCUMENT AND ALL REPRODUCTIONS THEREOF ARE
THE EXCLUSIVE PROPERTY OF DIVERSHED WOODCRAFTS, INC.

THESE DOCUMENTS ARE SUPPLIED WITH THE UNDERSTANDING THAT THEY WILL NOT BE DISCLOSED TO THIRD PARTIES WITHOUT WRITTEN CONSENT OF DIVERSIFIED WOODCRAFTS, NC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT WRITTEN CONSENT IS SUBJECT TO LEGAL ACTION.



300 South Krueger Street Suring, WI 54174 diversifiedwoodcrafts.com

FORWARD VISION I TOOLS AND ASSEMBLY COMPONENTS

SHEET: REVISION: FORWARD VISION I _{2 OF 18} REV A

ASSEMBLY COMPONENTS						
ITEMS INCLUDED	PART#	PART DESCRIPTION	QTY			
BOLT - APRON TO APRON	100381	BOLT, 5/16 X2-3/4, CARRIAGE BOLT	2			
NUT - APRON TO APRON	100044	NUT,HEX 5/16 - 18 STEEL ZINC	2			
WASHER - APRON TO APRON	100451	WASHER,5√6 FLAT ZINC PLATED	2			
BRACKET - CORNER LEG	100077	CORNERS,STEEL TABLE APRON	2			
SCREWS - CORNER LEG	100037	SCREW,#10X5/8 QUAD PNHD LUB	8			
LEGS	500101	LEG,OAK,2.25X2.25X34.25	3			
LEG HARDWARE KIT	520001	LEG HARDWARE KIT, 1 LEG	2			
LEG LEVELER	100079	LEG LEVELER,BLK,BASE 1	1			
LEG BOOT	100076	LEG BOOT,BLK RUBBER	3			
SILICONE	100711	SILICONE,SEALANT,CLEAR	1			
RUBBER BASE MOLDING	100283	RUBBER BASE MOLDING (SOLD BY FOOT)	14			
STAINLESS STEEL CORNERS	100057	CORNERS-STAINLESS STEEL,BASE	4			
SCREWS - BASE	100064	SCREW,#6X ½ PTH SMS SS SCREW	16			
ELECTRICAL BOX	100033	ELECTRICAL BOX 3.00X2X2.5 DEEP	2			
ELECTRICAL OUTLET	100034	ELEC,OUTLET,GFI,20A 125V,BLK	2			
FIXTURE - FAUCET	100074-BKR	FIXTURE,L65-WSA-DIV(MULTI-SERVICE)	2			
FIXTURE - SINK	100691	SINK,EPOXY L3,BLK	1			
FIXTURE - SINK TRAP	100056	SINK TRAP,PLASTIC ADJUSTABLE	1			
FIXTURE - SINK STOPPER	100112	SINK STOPPER 1 ½,BLK	1			

NOTE:

- 1. *XX* INDICATES ITEMS USED ONLY FOR THE DROP IN SINK UNITS.
- 1.1. EX. 2946K AND 2956K
- 2. **XX** INDICATES ITEMS USED ONLY FOR THE END SINK UNITS.
- 2.1. EX. 2916K & KLH AND 2936K & KLH
- 3. ***XX*** INDICATES ITEMS USED ONLY FOR THE LAB HAND UNITS.
- 3.1. EX. 2916KLH AND 2936KLH

Α	CREATED DRAWING	11/2/16	EMR	-	
REV. DESCRIPTION		DATE	NAME	ECN NO.	
DEVISION LEVEL					

NOTED OTHERWISE	DWN BY:	EMR	DATE DWN:	11/2/16
DECIMALS: .X = ± .030 .XX = ± .020 .XXX = + .010	APR BY:		DATE APR:	
ANGLES: = ± 1°0′ CABINET SQUARENESS = ± .0625	APR BY:		DATE APR:	

CONFIDENTIAL:
ALL DESIGN RIGHTS RESERVED
THE INFORMATION, DATA, DESIGN, AND DRAWINGS EMBODIED
IN THIS DOCUMENT AND ALL REPRODUCTIONS THEREOF ARE
THE EXCLUSIVE PROPERTY OF DIVERSHED WOODCRAFTS, INC.

THESE DOCUMENTS ARE SUPPLIED WITH THE UNDERSTANDING THAT THEY WILL NOT BE DISCLOSED TO THIRD PARTIES WITHOUT WRITTEN CONSENT OF DIVERSIFIED WOODCRAFTS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT WRITTEN CONSENT IS SUBJECT TO LEGAL ACTION.



300 South Krueger Street Suring, WI 54174 diversifiedwoodcrafts.com

FORWARD VISION I TOOLS AND ASSEMBLY COMPONENTS

SHEET: REVISION: FORWARD VISION I 3 OF 18 REV A

ASSEMBLY COMPONENTS						
ITEMS INCLUDED	PART#	PART DESCRIPTION	QTY			
FIXTURE - STRAINER	100055	SINK,OUTLET/STRAINER EPOXY,BLK	1			
LONG APRON	N/A	LONG APRON FOR END SINK - 0.81"THK X 4.50"W X 16.06"L	1			
SHORT APRON	N/A	SHORT APRON FOR END SINK - 0.81"THK X 4.50"W X 10.44"L	2			
LEGS	500100	LEG,OAK,2.25X2.25X28.25	2			
LEG HARDWARE	520001	LEG HARDWARE KIT, 1 LEG	2			
LEG BOOT	100076	LEG BOOT,BLK RUBBER	2			
BRACKET - CORNER LEG	100077	CORNERS,STEEL TABLE APRON	2			
SCREWS - CORNER LEG	100037	SCREW,#10X % QUAD PNHD LUB	8			
L BRACKET	100355	BRACKET,RAIL 1.25X1.25X4.25	2			
SCREWS - L BRACKET	100649	SCREW,#8X ¾ PHIL TRUSS HEAD SMS	8			
FIXTURE - FAUCETS	100074-BKR	FIXTURE,L65-WSA-DIV(MULTI-SERVICE)	2			
FIXTURE - SINK	100831	SINK,EPOXY 46E,BLK END/WALL	1			
** FIXTURE - SINK TRAP**	100056	SINK TRAP,PLASTIC ADJUSTABLE	1			
FIXTURE - STOPPER	100112	SINK STOPPER, 1 ½,BLK	1			
FIXTURE - STRAINER	100055	SINK,OUTLET/STRAINER EPOXY,BLK	1			
ROD SOCKETS	206505	ROD SOCKET ASSY, SOCKET, WASHER, NUT	2			
LAB HAND	101090	LAB HAND METAL	2			
LAB HAND ROD	206578-P	ROD,LAB HAND,PLASTIC 1/8 DIAX9L	2			

NOTE:

- 1. *XX* INDICATES ITEMS USED ONLY FOR THE DROP IN SINK UNITS.
- 1.1. EX. 2946K AND 2956K
- 2. **XX** INDICATES ITEMS USED ONLY FOR THE END SINK UNITS.
- 2.1. EX. 2916K & KLH AND 2936K & KLH
- 3. ***XX*** INDICATES ITEMS USED ONLY FOR THE LAB HAND UNITS.
- 3.1. EX. 2916KLH AND 2936KLH

Α	CREATED DRAWING	11/2/16	EMR	-	
REV. DESCRIPTION		DATE	NAME	ECN NO.	
DEVISION LEVEL					

NOTED OTHERWISE	DWN BY:	EMR	DATE DWN:	11/2/16
DECIMALS: .X = ± .030 .XX = ± .020 .XXX = + .010	APR BY:		DATE APR:	
ANGLES: = ± 1°0′ CABINET SQUARENESS = ± .0625	APR BY:		DATE APR:	

CONFIDENTIAL:
ALL DESIGN RIGHTS RESERVED
THE INFORMATION, DATA, DESIGN, AND DRAWINGS EMBODIED
IN THIS DOCUMENT AND ALL REPRODUCTIONS THEREOF ARE
THE EXCLUSIVE PROPERTY OF DIVERSHED WOODCRAFTS, INC.


THESE DOCUMENTS ARE SUPPLIED WITH THE UNDERSTANDING THAT THEY WILL NOT BE DISCLOSED TO THIRD PARTIES WITHOUT WRITTEN CONSENT OF DIVERSIFIED WOODCRAFTS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT WRITTEN CONSENT IS SUBJECT TO LEGAL ACTION.





300 South Krueger Street Suring, WI 54174 diversifiedwoodcrafts.com


FORWARD VISION I TOOLS AND ASSEMBLY COMPONENTS


SHEET: REVISION: FORWARD VISION I NTS 4 OF 18 REV A

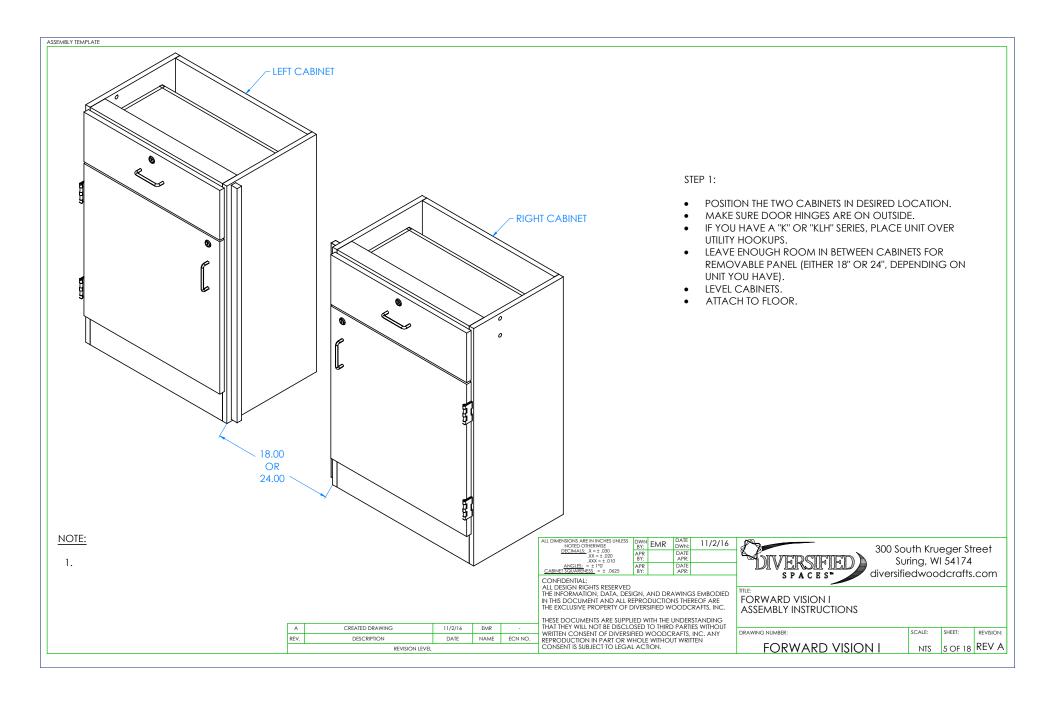


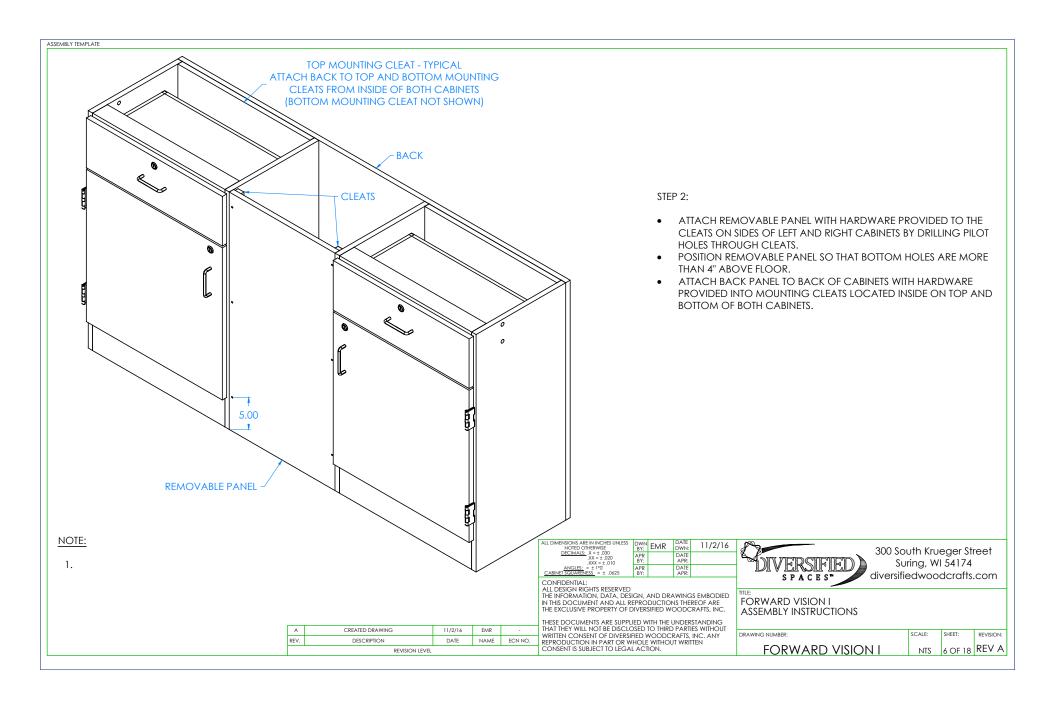


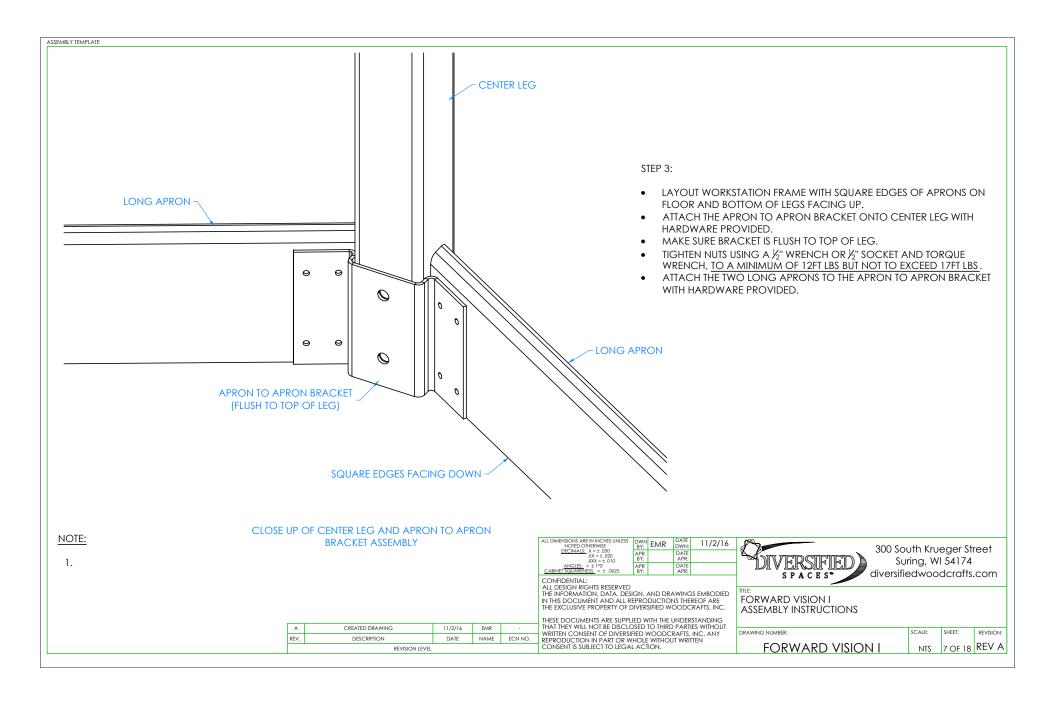


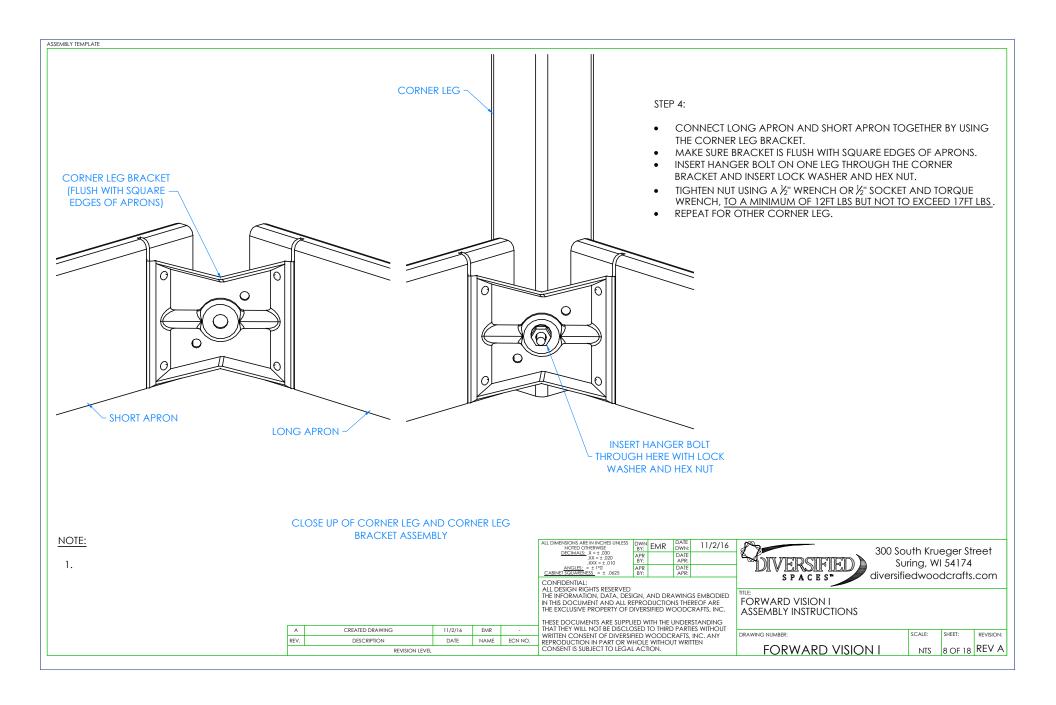


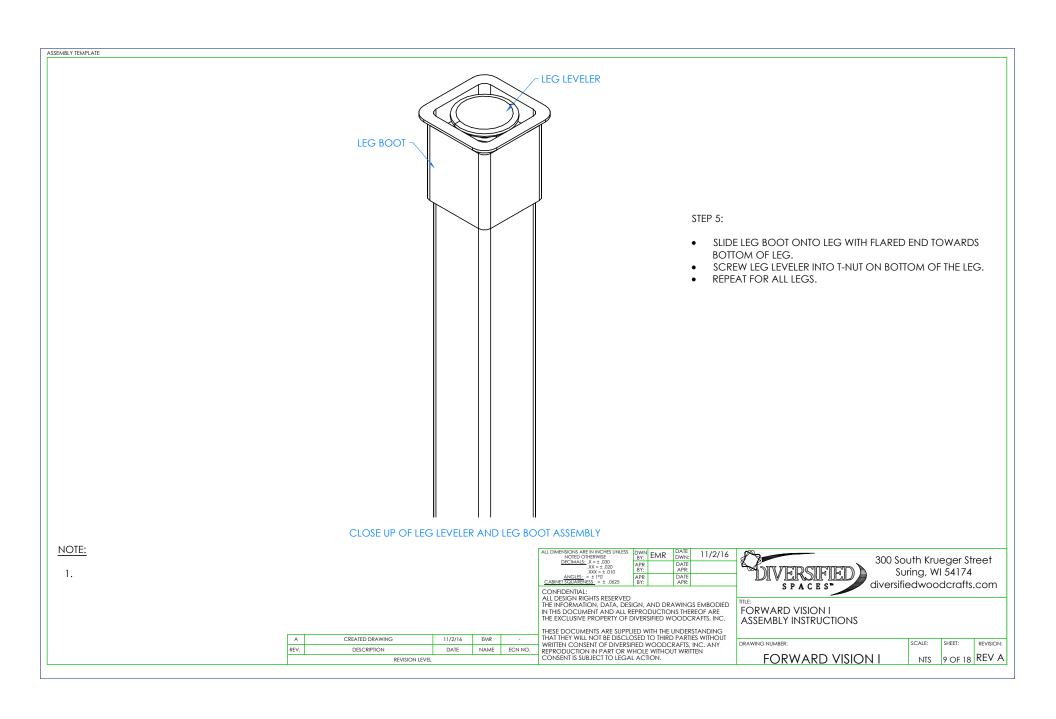


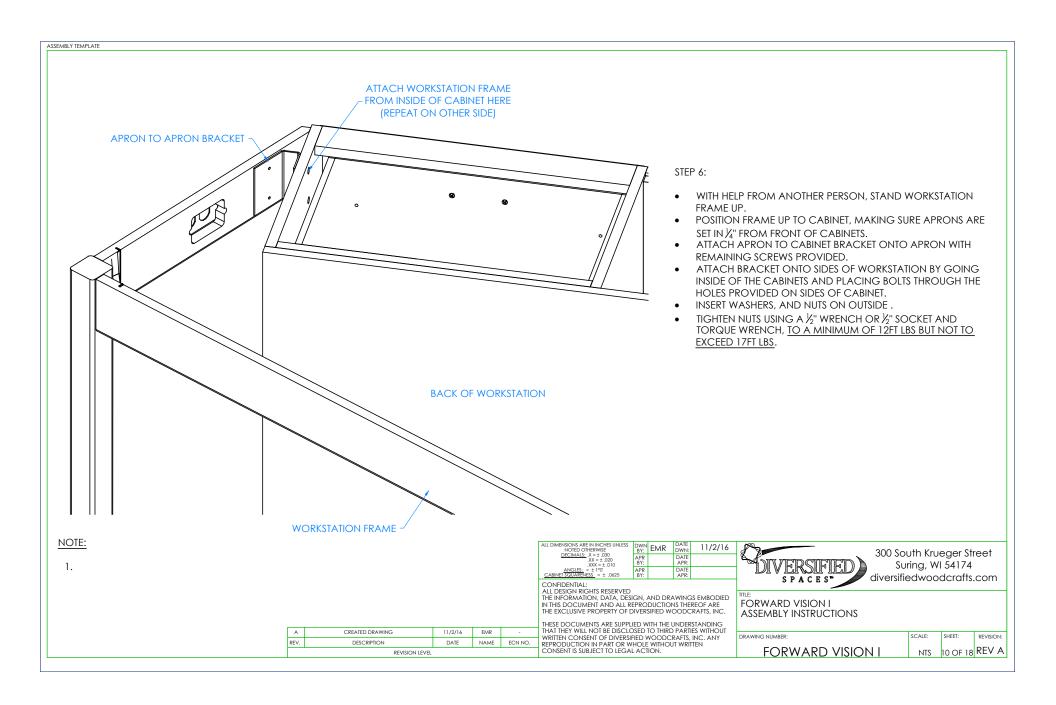


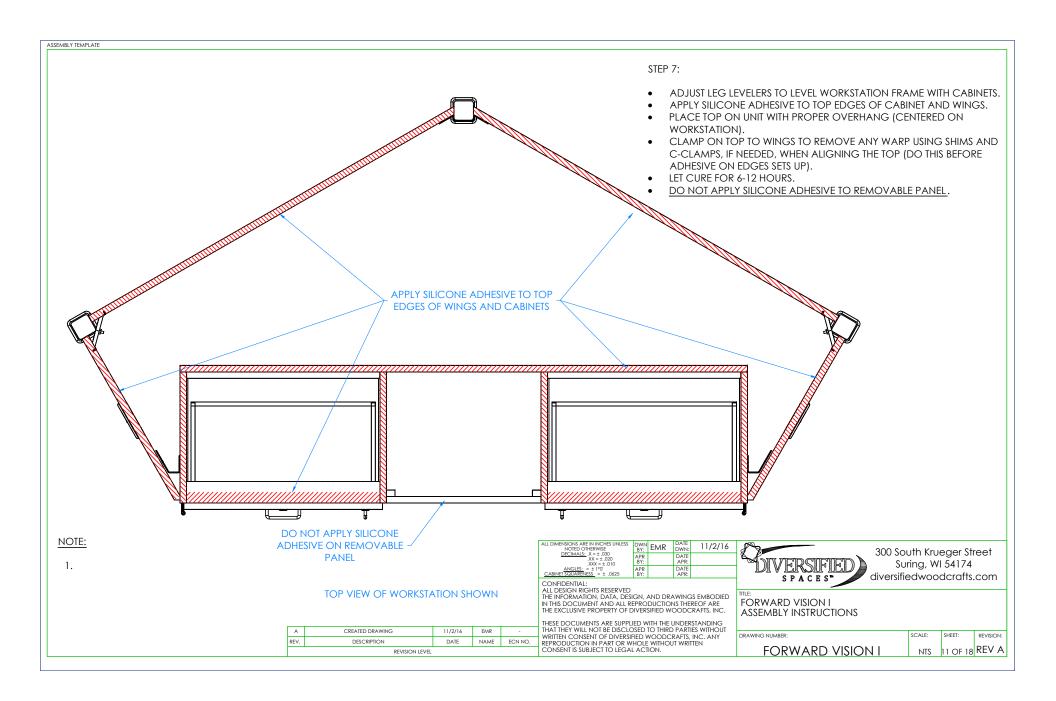


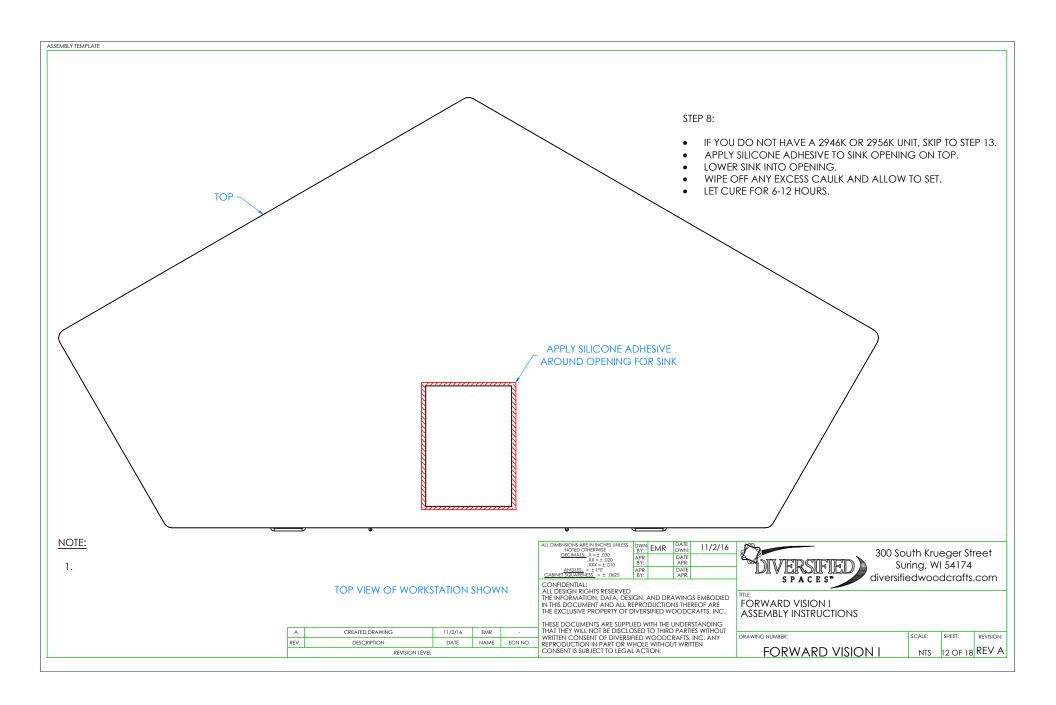


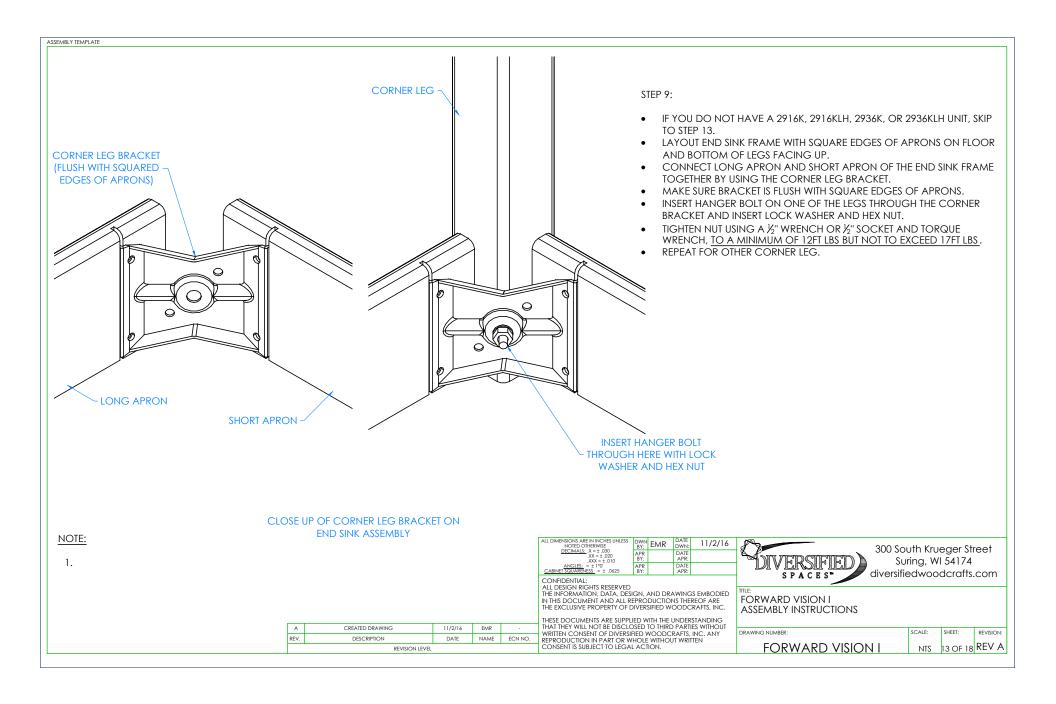

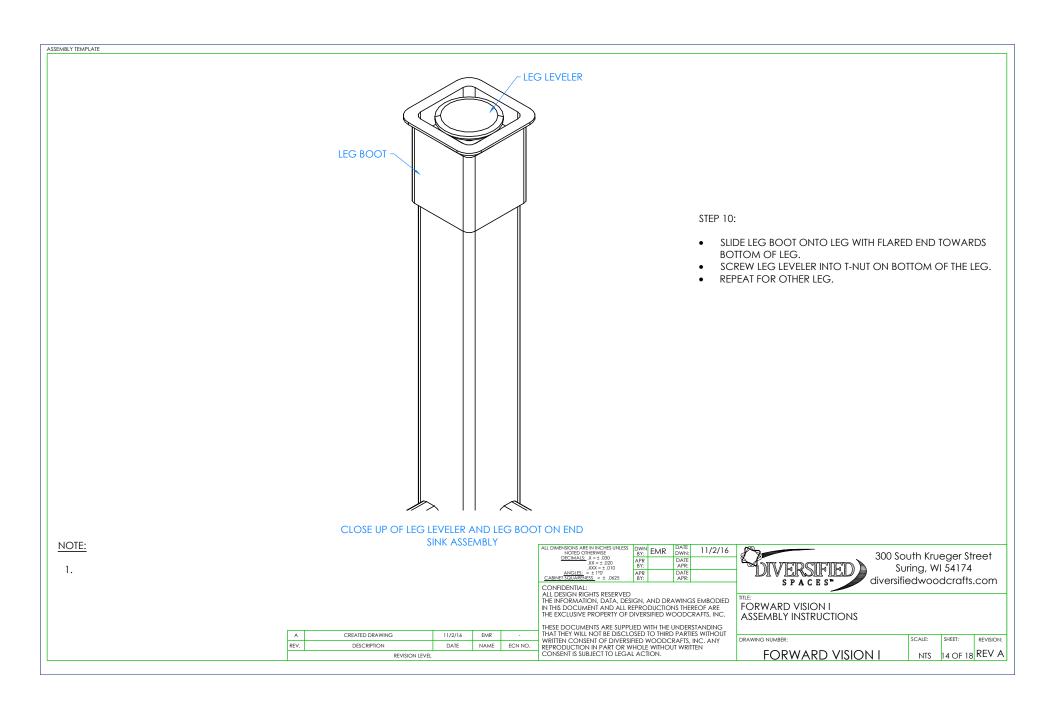

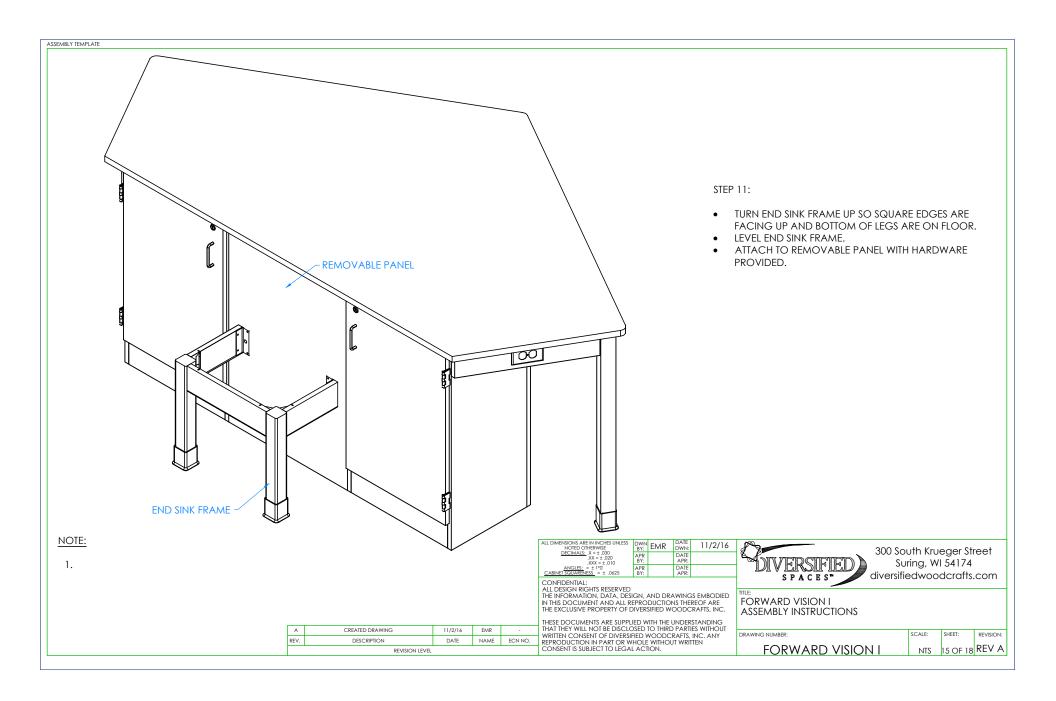

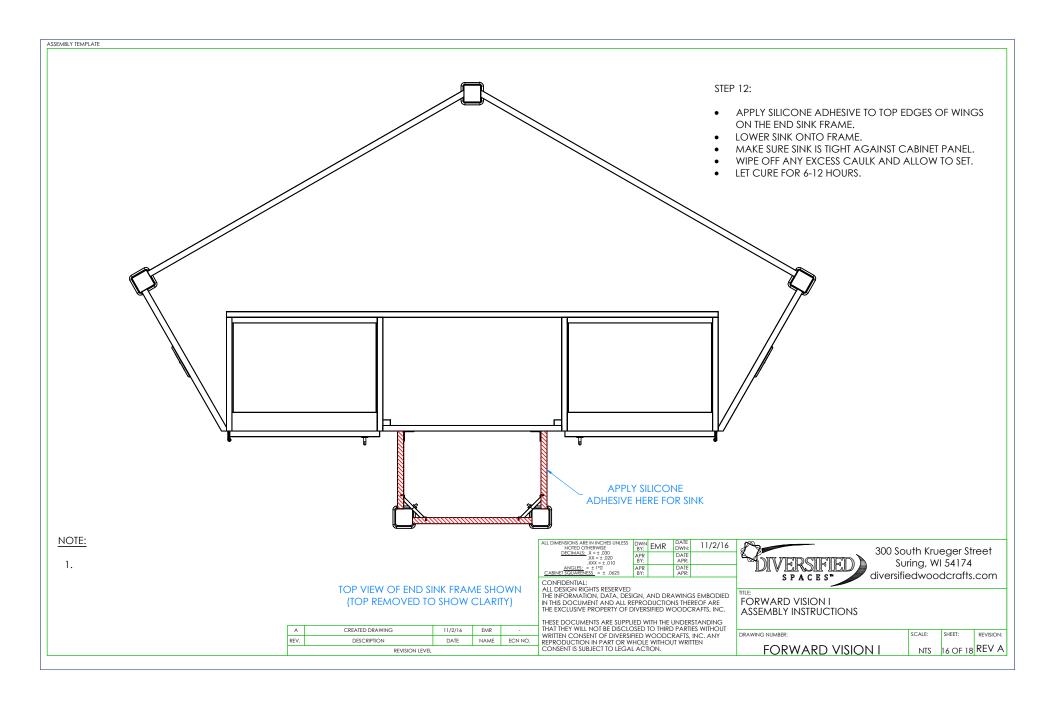

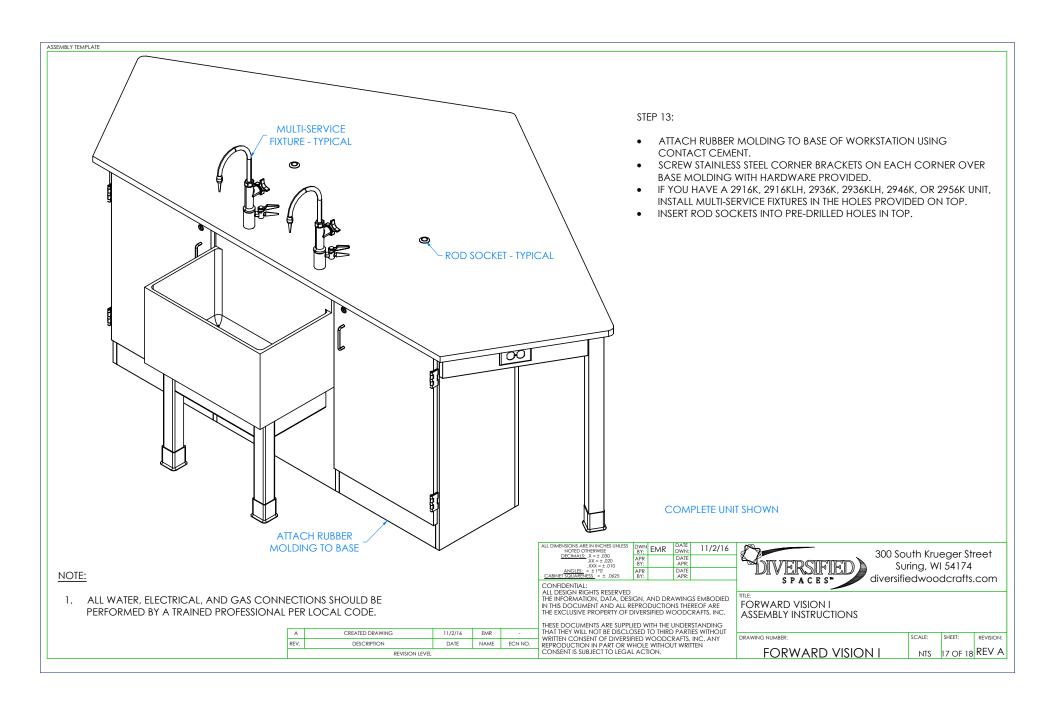

TROUBLESHOOTING YOUR GFCI ELECTRICAL RECEPTACLE:

<u>PLEASE NOTE: THROUGHOUT ANY OF THE FOLLOWING STEPS (PROCEDURES); IF YOU ARE NOT SURE YOU CAN DO THIS JOB SAFELY, AND COMPETENTLY, REFER THIS WORK TO QUALIFIED PROFESSIONAL!</u>

If your unit comes equipped with a GFCI (Ground Fault Circuit Interrupter) electrical receptacle, and there is no power in the receptacle please consider/check the following:

- The extension cord (if being used) is working properly.
- The breaker hasn't been tripped, or turned off.

This type of GFCI has two testing-related buttons on it. One button is appropriately labeled "TEST", and the other button is labeled "RESET". To test the GFCI receptacle follow these steps:

- Plug in an appliance (lamp or night light) into the outlet. The light should now be on. Then press the "TEST" button on the GFCI. The GFCI "RESET" button should pop out, and the light should go out.
- If the "RESET" button pops out, but the light doesn't go out, the GFCI has been improperly wired. In this case please contact a certified professional. There may also be a problem with other wiring in the same circuit.
- If the "RESET" button doesn't pop out, the GFCI is defective, or malfunctioned, and should be replaced.
- If the GFCI is functioning properly, and the lamp goes out, press the "RESET" button to restore power to the outlet.

Conversely, if you have a GFI that has tripped (which is common) and it will not reset, you may have a wiring short in the circuit, a defective appliance on the circuit, or the GFI itself has become defective. To test a tripping GFCI follow these steps:

- Remove every appliance connected to the GFCI's circuit and reset it. If it doesn't reset there may either be a wiring fault behind a socket outlet, or your GFCI itself has become faulty.
- Make sure whatever you are plugging into to the GFCI is dry and not damaged.
- Only plug in one item at a time. If you are plugging in a defective item it will cause the GFCI to trip, and that item therefore should be replaced.

If you are still having difficulty the easiest way to troubleshoot a GFI is to obtain a GFI tester, which is available at most hardware stores. It plugs into the GFI outlet, and will supply you with a "snapshot" of your connections, indicating wiring problems and/or the condition of the GFI. Another way to troubleshoot is to simply purchase a new GFI and install it.