


LED Strips Light

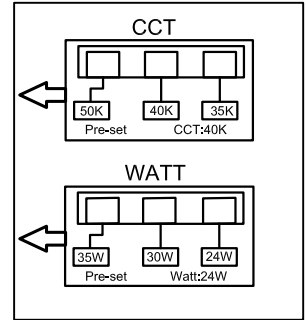

Advantage:

- Excellent 130 Lumens a watt
- Input voltage is AC 100-277 V
- CCT Tunable 3500K & 4000K & 5000K
- Multiple power regulation: 24W&30W&35W
- 5 years warranty
- Mounts to almost any surface, multiple options
- Excellent Beam Angle 120 Degrees

Product description:

LED strip is ideal for replacing traditional fluorescent lamp. It has multiple advantages. Easy installation: surface, hanging or continuous row mount. Available in standard and high voltage. 0-10V dimming. Motion sensor and emergency battery for option, Excellent for Offices, Warehouse, Garage, Shopping Mall, School, and many more applications.





LED Strip Light

Standard :




Optional :



LED Strips Light

Specifications:

Unit : inch(mm)

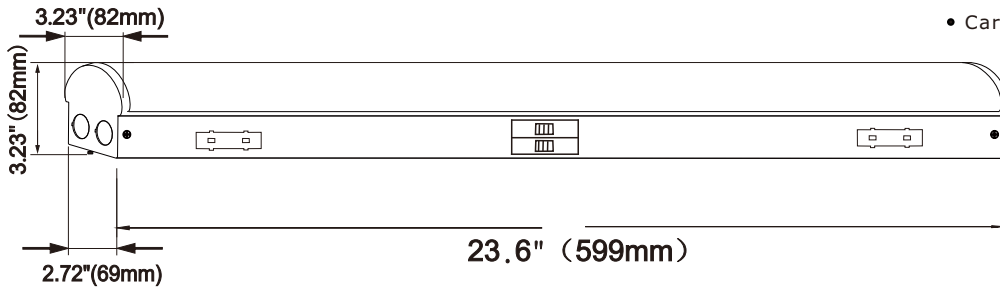




Structure Features

- Shell materials: Aluminum & PC.
- Finish: White
- Net weight : 1.01Kg (2.22 lbs)
- Product Size:599mmX82mmX82mm
23.6\"X3.23\"X3.23\"
- Carton Size:665.5mmX189.9mmX195.1mm
26.2\"X7.48\"X7.68\"(4Pcs/CTN)

Technical Parameters:

WSD-ST2FT243035W27-3545K			
Power	24W/30W/35W	Beam Angle	120°
Input Voltage	AC100-277V	Lighting Source	LED SMD
PF	>0.90	Lens	Frosted PC
Driver Efficiency	>90%	Working Temperature	-20 - +40°C
Luminous Flux	2877 Lm/3839Lm/4228Lm	Storage Temperature	-40 - +80°C
Color Temperature	3500K/4000K/5000K	Protection Level	IP20
CRI	Ra>80	Cable	ON Cable
Optional dimming function	0-10Vdc	SystemEfficacy(Lm/w)	130 Lm/w

Photometry:

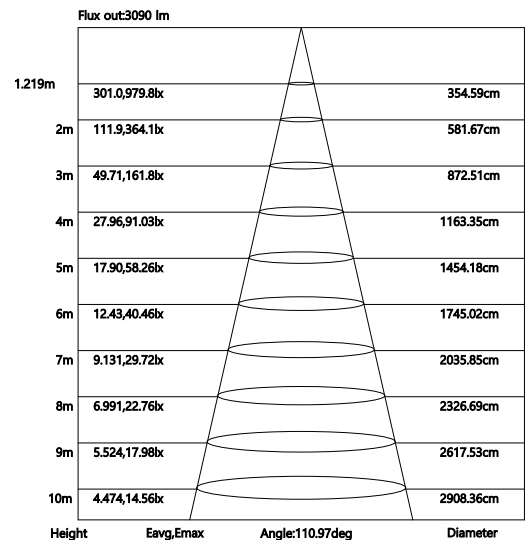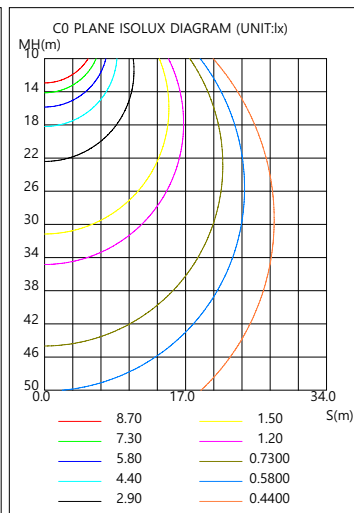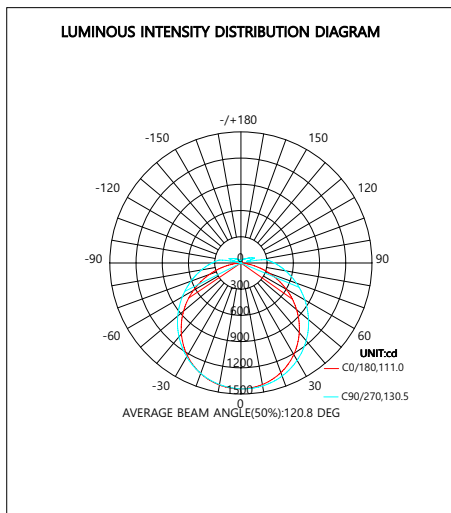


Example:WSD-ST2FT243035W27-3545K

WSD	ST	2 FT	243035W	27	3545K
Company	Product	Size	Power	Voltage	Color Temp
WSD LED INC	LED Strip Light	2FT(2feet)	24W(24W) 30W(30W) 35W(35W)	AC100-277V	35K(3500K) 4K(4000K) 5K(5000K)


LED Strips Light

Mounting :


CHAININSTALLATION(Standard Installation)



Step1. Insert a chain on each hook and insert hooks into the installation holes




Step 2. Attach the chains to the ceiling and adjust till balanced and secured



Step3. Take wires from the shielded cables, connect AC wires and Dimming wires(if needed)




Step4. Wrap the wires with metal materials




Step5. Optional seamless infinite splicing


CHAININSTALLATION(Optional)




Step1. Snap buckles into the lamp body

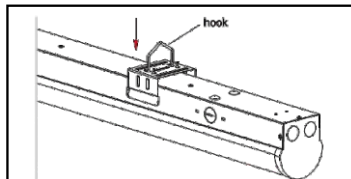


Step 2. Attach the hooks at the slotted holes of buckles

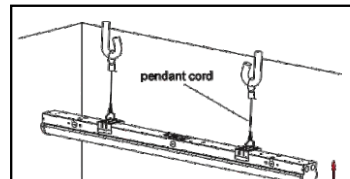


Step3. Hook buckles with pendant cord and suspend the light to the desired height

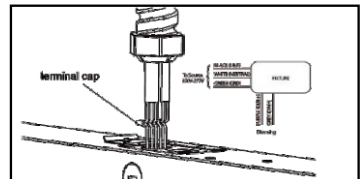


Step4. Take wires from the terminal caps, connect AC wires and Dimming wires(if needed)



Step5. Insert the terminal blocks and wires into the strip

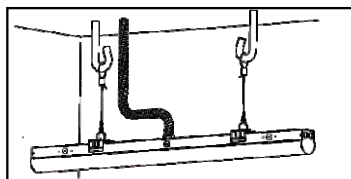


Step6. Insert the wire terminal joints to the wire entry

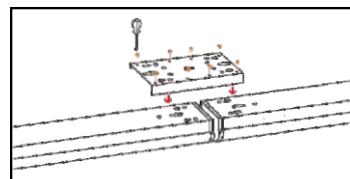


Step7. Optional seamless infinite splicing


SURFACEMOUNTEDINSTALLATION(Optional)




Step 1. Fix the buckles in parallel by screws with 18.9" distance between each buckle

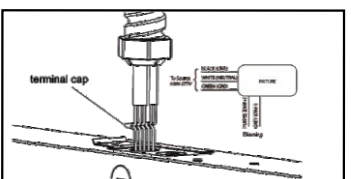

Step 2. Take wires from the terminal caps, connect AC wires and Dimming wires(if needed)



Step3. Secure the strip with buckles

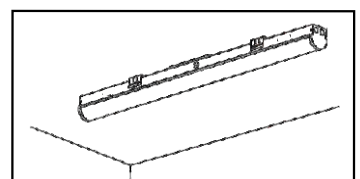

Step4. Installation is completed