


PORTABLE

ASME tanks and safety valves
Oversized components
Powder coated tanks
1 Year Warranty



OIL LESS

Direct drive
Low noise
Low vibration
Low maintenance
1 year warranty

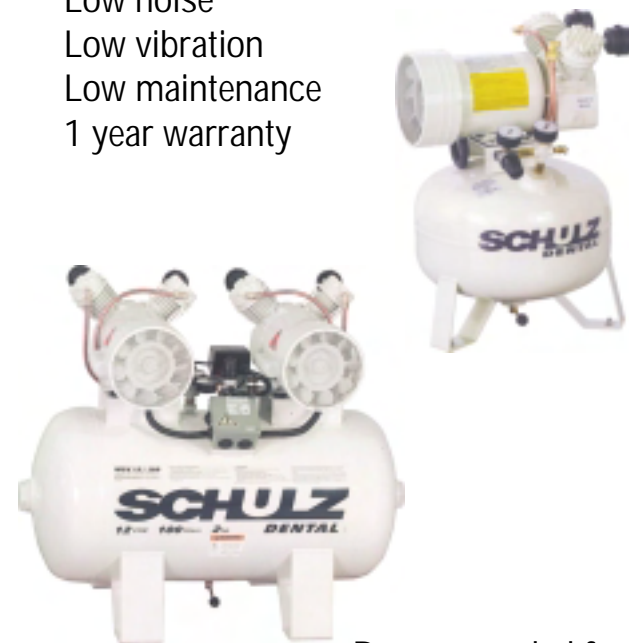

Recommended for:
Oil less applications
Dental offices



PARTS IN STOCK



AIR FILTERS

PORTABLE

Single Stage - 125 psi

MODEL	MOTOR			FREE AIR CFM	ASME TANK		Schulz Pump	APPROX WEIGHT lbs
	hp	phase	volt		gallon	type		
17HL52-1	1,0	single	110/220	3,1	7	horiz	MSI5,2ML	70
SIDESTACK	1,5	single	110	2,5	2x2	stack	CSA7,8	60
PANCAKE	1,5	single	110	2,5	4,5	panc	CSA7,8	50
28TTL10X-1	2,0	single	110/220	6,1	2x4	twin	MSL10MAX	195
220HL10X-1	2,0	single	110/220	6,1	20	horiz	MSL10MAX	150
230VL10X-1	2,0	single	110/220	6,1	30	vert	MSL10MAX	195
55TTL15X-G	5,5	Honda GX Series		9,2	2x4	twin	MSL15MAX	195
5520HL15X-G	5,5	Honda GX Series		9,2	20	horiz	MSL15MAX	165

Two Stage - 140 psi

88TTL20X-G	8,0	Honda GX Series		16,4	2x4	twin	MSL20MAX	230
------------	-----	-----------------	--	------	-----	------	----------	-----

OIL LESS

Single Stage - 125 psi

MODEL	MOTOR			FREE AIR CFM	ASME TANK		Schulz Pump	APPROX WEIGHT lbs
	hp	phase	volt		gallon	type		
18PMSV6-1	1,0	single	110/220	2,5	8	panc	MSV6	100
226HMSV6-1	2,0	single	220	5,0	26	horiz	2 x MSV6	150
330HMSV6-1	3,0	single	220	7,5	30	horiz	3 x MSV6	200

SCHULZ

OF AMERICA, INC.



SCHULZ

MAGNETIC STARTERS
VIBRATION PADS
AUTO TANK DRAINS
LOW OIL MONITORS
DUAL CONTROLS

REFRIGERATED DRYERS
AFTERCOOLERS



COMPRESSED
AIR ADVISORS
Inc.

Compressed Air Advisors, Inc.

Phone: 877.247.2381

info@compressedairadvisors.com

www.compressedairadvisors.com

Available Certifications




ASME TANKS AND SAFETY VALVES

Quality Management System - Joinville Plant - Scope Certified: Project, Development and Manufacture of Air Compressors and Pressure vessels for compressed air



The Benefits of a Better Design

- Swedish steel valves
- Two year pump warranty
- Slotted crankcase bolt holes
- All components CNC machined
- Easy access to adjust belt tension
- Deeper cylinder fins for heat dissipation
- T.E.F.C. motors standard 10/15 HP
- Oversized in line check valves
- Counter balanced crankshaft
- Oversized main bearings
- Notched belts standard
- Cast iron pumps
- Powder coated
- Low RPM

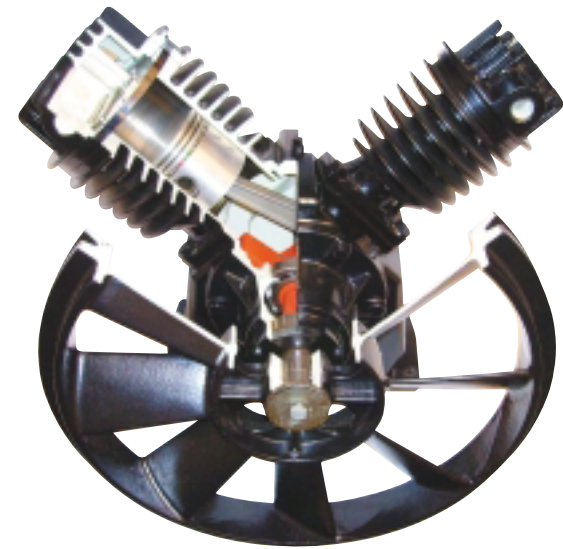

SCHULZ
OF AMERICA, INC.

"A New Evolution is in the Air"

V - SERIES HEAVY DUTY

STANDARD EQUIPMENT

- Low RPM
- Balanced drive pulleys
- Pressure gauge indicator
- Manual condensate tank drain
- T.E.F.C. motors standard 10-20 HP
- NEMA designed motors
- Heavy duty cast iron construction
- ASME air receivers
- Large intake filter/silencers
- ASME approved tank shut off valve
- ASME safety relief valves
- Easy access to belts
- Enclosed belt guard
- Vertical and horizontal designs
- UL approved pressure switch
- 2 Year Pump Warranty



L - SERIES HEAVY DUTY

STANDARD EQUIPMENT

- Cast iron construction
- Single and two stage
- ASME air receiver
- Low RPM
- Manual condensate drain
- UL approved pressure switch
- Loadless start
- Large intake filter/silencers
- Auto start/stop
- Pressure gauge
- Easy access to belts
- Enclosed belt guards
- Vertical and horizontal designs
- ASME relief valve
- ASME approved tank shut off valve
- 2 Year Pump Warranty



Two Stage - 175 psi								
MODEL	MOTOR			FREE AIR	ASME TANK		Schulz Pump	APPROX WEIGHT lbs
	hp	phase	volt		gallon	type		
580VV20X-1	5,0	single	230	17,20	80	vert	MSV20MAX	535
580VV20X-3	5,0	three	230/460	17,20	80	vert	MSV20MAX	535
7580VV30X-1	7,5	single	230	25,1	80	vert	MSV30MAX	605
7580VV30X-3	7,5	three	230/460	25,1	80	vert	MSV30MAX	605
10120HW40X-3	10,0	three	230/460	32,5	120	horiz	MSW40MAX	800
15120HW60X-3	15,0	three	230/460	51,2	120	horiz	MSW60MAX	930
20120HW80X-3	20,0	three	230/460	64,1	120	horiz	MSW80MAX	1100

Single Stage - 125 psi								
MODEL	MOTOR			FREE AIR	ASME TANK		Schulz Pump	APPROX WEIGHT lbs
	hp	phase	volt		gallon	type		
360VL15X-1	3,0	single	230	9,2	60	vert	MSL15MAX	235
Two Stage - 175 psi								
580VL20X-1	5,0	single	230	17,1	80	vert	MSL20MAX	515
7580VL30X-1	7,5	single	230	24,6	80	vert	MSL30MAX	565
830HL20X-G	8,0	Honda Engine GX Series		17,1	30	horiz	MSL20MAX	365
10120HL40X-3	10,0	three	230/460	32,3	120	horiz	MSL40MAX	855
1330HL30X-G	13,0	Honda Engine GX Series		25,5	30	horiz	MSL30MAX	395