## SIEMENS

## Data sheet

## 3RT2046-1KB40



power contactor, AC-3 95 A, 45 kW / 400 V 1 NO + 1 NC, 24 V DC 3-pole, 3 NO, Size S3 screw terminal integrated varistor Suitable for 2 A PLC outputs

SIRIUS
Coupling relay
3RT2
S3
No
Yes
19.8 W
6.6 W
0.9 W
8 kV
6 kV
690 V
6.3 g / 5 ms, 3.6 g / 10 ms
6.3 g / 5 ms, 3.6 g / 10 ms
9.8 g / 5 ms, 5.6 g / 10 ms
9.8 g / 5 ms, 5.6 g / 10 ms
10 000 000
5 000 000
10 000 000
Q
01.03.2017 00:00:00
2 000 m
-25 +60 °C
-55 +80 °C
3


number of NO contacts for main contacts	3
• operating voltage at AC-3 rated value maximum	1 000 V
operational current	
<ul> <li>at AC-1 at 400 V at ambient temperature 40 °C rated value</li> </ul>	130 A
• at AC-1	
— up to 690 V at ambient temperature 40 °C rated value	130 A
— up to 690 V at ambient temperature 60 °C rated value	110 A
— up to 1000 V at ambient temperature 40 °C rated value	70 A
— up to 1000 V at ambient temperature 60 °C rated value	60 A
• at AC-3	
— at 400 V rated value	95 A
— at 500 V rated value	95 A
— at 690 V rated value	78 A
<ul> <li>at AC-4 at 400 V rated value</li> </ul>	80 A
<ul> <li>at AC-5a up to 690 V rated value</li> </ul>	114 A
<ul><li>at AC-5b up to 400 V rated value</li><li>at AC-6a</li></ul>	95 A
<ul> <li>— up to 230 V for current peak value n=20 rated value</li> </ul>	84.4 A
— up to 400 V for current peak value n=20 rated value	84.4 A
— up to 500 V for current peak value n=20 rated value	84.4 A
— up to 690 V for current peak value n=20 rated value	58 A
• at AC-6a	<b>50.0</b> A
— up to 230 V for current peak value n=30 rated value	56.3 A
— up to 400 V for current peak value n=30 rated value	56.3 A
— up to 500 V for current peak value n=30 rated value	56.3 A
— up to 690 V for current peak value n=30 rated value	56.3 A
minimum cross-section in main circuit at maximum AC-1 rated value	50 mm²
operational current for approx. 200000 operating cycles at AC-4	
<ul> <li>at 400 V rated value</li> </ul>	
	42 A
• at 690 V rated value	42 A 30 A
operational current	
• at 1 current path at DC-1	30 A
<ul> <li>operational current</li> <li>at 1 current path at DC-1</li> <li>at 24 V rated value</li> </ul>	30 A 100 A
operational current • at 1 current path at DC-1 — at 24 V rated value — at 110 V rated value	30 A 100 A 9 A
<ul> <li>operational current</li> <li>at 1 current path at DC-1</li> <li>at 24 V rated value</li> </ul>	30 A 100 A
operational current • at 1 current path at DC-1 — at 24 V rated value — at 110 V rated value	30 A 100 A 9 A
operational current • at 1 current path at DC-1 — at 24 V rated value — at 110 V rated value — at 220 V rated value	30 A 100 A 9 A 2 A
operational current • at 1 current path at DC-1 — at 24 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value	30 A 100 A 9 A 2 A 0.6 A
operational current • at 1 current path at DC-1 — at 24 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value	30 A 100 A 9 A 2 A 0.6 A
<ul> <li>operational current</li> <li>at 1 current path at DC-1 <ul> <li>at 24 V rated value</li> <li>at 110 V rated value</li> <li>at 220 V rated value</li> <li>at 440 V rated value</li> <li>at 600 V rated value</li> </ul> </li> <li>with 2 current paths in series at DC-1</li> </ul>	30 A 100 A 9 A 2 A 0.6 A 0.4 A
<ul> <li>operational current</li> <li>at 1 current path at DC-1 <ul> <li>at 24 V rated value</li> <li>at 110 V rated value</li> <li>at 220 V rated value</li> <li>at 440 V rated value</li> <li>at 600 V rated value</li> </ul> </li> <li>with 2 current paths in series at DC-1 <ul> <li>at 24 V rated value</li> </ul> </li> </ul>	30 A 100 A 9 A 2 A 0.6 A 0.4 A 100 A
<ul> <li>operational current</li> <li>at 1 current path at DC-1 <ul> <li>at 24 V rated value</li> <li>at 110 V rated value</li> <li>at 220 V rated value</li> <li>at 440 V rated value</li> <li>at 600 V rated value</li> </ul> </li> <li>with 2 current paths in series at DC-1 <ul> <li>at 24 V rated value</li> <li>at 110 V rated value</li> <li>at 110 V rated value</li> </ul> </li> </ul>	30 A 100 A 9 A 2 A 0.6 A 0.4 A 100 A
<ul> <li>operational current</li> <li>at 1 current path at DC-1</li> <li>at 24 V rated value</li> <li>at 110 V rated value</li> <li>at 220 V rated value</li> <li>at 440 V rated value</li> <li>at 600 V rated value</li> <li>with 2 current paths in series at DC-1</li> <li>at 24 V rated value</li> <li>at 110 V rated value</li> <li>at 110 V rated value</li> <li>at 220 V rated value</li> </ul>	30 A 100 A 9 A 2 A 0.6 A 0.4 A 100 A 100 A 10 A
<ul> <li>operational current</li> <li>at 1 current path at DC-1 <ul> <li>at 24 V rated value</li> <li>at 110 V rated value</li> <li>at 220 V rated value</li> <li>at 440 V rated value</li> <li>at 600 V rated value</li> </ul> </li> <li>with 2 current paths in series at DC-1 <ul> <li>at 24 V rated value</li> <li>at 110 V rated value</li> <li>at 110 V rated value</li> <li>at 220 V rated value</li> <li>at 440 V rated value</li> </ul> </li> </ul>	30 A 100 A 9 A 2 A 0.6 A 0.4 A 100 A 100 A 100 A 100 A 10 A
<ul> <li>operational current</li> <li>at 1 current path at DC-1 <ul> <li>at 24 V rated value</li> <li>at 110 V rated value</li> <li>at 220 V rated value</li> <li>at 440 V rated value</li> <li>at 600 V rated value</li> </ul> </li> <li>with 2 current paths in series at DC-1 <ul> <li>at 24 V rated value</li> <li>at 110 V rated value</li> <li>at 220 V rated value</li> <li>at 24 V rated value</li> <li>at 24 V rated value</li> <li>at 440 V rated value</li> <li>at 440 V rated value</li> <li>at 440 V rated value</li> <li>at 220 V rated value</li> <li>at 260 V rated value</li> <li>at 440 V rated value</li> <li>at 600 V rated value</li> </ul> </li> </ul>	30 A 100 A 9 A 2 A 0.6 A 0.4 A 100 A 100 A 100 A 100 A 10 A 1.8 A
<ul> <li>operational current</li> <li>at 1 current path at DC-1 <ul> <li>at 24 V rated value</li> <li>at 110 V rated value</li> <li>at 220 V rated value</li> <li>at 440 V rated value</li> <li>at 600 V rated value</li> </ul> </li> <li>with 2 current paths in series at DC-1 <ul> <li>at 24 V rated value</li> <li>at 110 V rated value</li> <li>at 110 V rated value</li> <li>at 220 V rated value</li> <li>at 440 V rated value</li> <li>at 24 V rated value</li> <li>at 24 V rated value</li> <li>at 110 V rated value</li> <li>at 110 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> </ul> </li> <li>with 3 current paths in series at DC-1</li> </ul>	30 A 100 A 9 A 2 A 0.6 A 0.4 A 100 A 100 A 100 A 10 A 10 A 1 A


100 A         100 A         35 A         0.8 A         0.35 A         45 kW         22 kW         45 kW         55 kW         75 kW         22 kW         23 kV-A         58 kV-A         58 kV-A         98 kV-A         22.4 kV-A         39 kV-A         45.7 kV-A         69 kV-A         1 725 A; Use minimum cross-section acc. to AC-1 rated value         1 725 A; Use minimum cross-section acc. to AC-1 rated value         1 725 A; Use minimum cross-section acc. to AC-1 rated value         1 725 A; Use minimum cross-section acc. to AC-1 rated value         1 900 t/h         1 000 t/h         900 t/h         350 t/h         250 t/h
100 A         35 A         0.8 A         0.35 A         45 kW         22 kW         45 kW         22 kW         45 kW         55 kW         75 kW         22 kW         27.4 kW         33 kV-A         58 kV-A         73 kV-A         69 kV-A         22.4 kV-A         39 kV-A         48.7 kV-A         67.3 kV-A         48.7 kV-A         67.3 kV-A         48.7 kV-A         946 A; Use minimum cross-section acc. to AC-1 rated value         1 297 A; Use minimum cross-section acc. to AC-1 rated value         946 A; Use minimum cross-section acc. to AC-1 rated value         946 A; Use minimum cross-section acc. to AC-1 rated value         1 000 1/h         900 1/h         350 1/h         850 1/h         250 1/h
100 A         35 A         0.8 A         0.35 A         45 kW         22 kW         45 kW         75 kW         22 kW         22 kW         22 kW         23 kV-A         33 kV-A         58 kV-A         73 kV-A         69 kV-A         22.4 kV-A         39 kV-A         48.7 kV-A         67.3 kV-A         48.7 kV-A         946 A; Use minimum cross-section acc. to AC-1 rated value         946 A; Use minimum cross-section acc. to AC-1 rated value         946 A; Use minimum cross-section acc. to AC-1 rated value         100 1/h         900 1/h         350 1/h         850 1/h
100 A         35 A         0.8 A         0.35 A         45 kW         22 kW         45 kW         75 kW         22 kW         22 kW         22 kW         23 kV-A         33 kV-A         58 kV-A         73 kV-A         69 kV-A         22.4 kV-A         39 kV-A         48.7 kV-A         67.3 kV-A         48.7 kV-A         946 A; Use minimum cross-section acc. to AC-1 rated value         946 A; Use minimum cross-section acc. to AC-1 rated value         946 A; Use minimum cross-section acc. to AC-1 rated value         100 1/h         900 1/h         350 1/h         850 1/h
100 A         35 A         0.8 A         0.35 A         45 kW         22 kW         45 kW         75 kW         22 kW         27.4 kW         33 kV-A         58 kV-A         73 kV-A         69 kV-A         22.4 kV-A         39 kV-A         48.7 kV-A         67.3 kV-A         48.7 kV-A         96 A; Use minimum cross-section acc. to AC-1 rated value         946 A; Use minimum cross-section acc. to AC-1 rated value         946 A; Use minimum cross-section acc. to AC-1 rated value         486 A; Use minimum cross-section acc. to AC-1 rated value         1 000 1/h         900 1/h         350 1/h
100 A 35 A 0.8 A 0.35 A 45 kW 22 kW 45 kW 55 kW 75 kW 22 kW 27.4 kW 33 kV·A 58 kV·A 33 kV·A 58 kV·A 39 kV·A 48.7 kV·A 48.7 kV·A 48.7 kV·A 48.7 kV·A 48.7 kV·A 1 725 A; Use minimum cross-section acc. to AC-1 rated value 1 297 A; Use minimum cross-section acc. to AC-1 rated value 1 297 A; Use minimum cross-section acc. to AC-1 rated value 1 297 A; Use minimum cross-section acc. to AC-1 rated value 1 297 A; Use minimum cross-section acc. to AC-1 rated value 1 297 A; Use minimum cross-section acc. to AC-1 rated value 1 000 1/h 900 1/h
100 A 35 A 0.8 A 0.35 A 45 kW 22 kW 45 kW 55 kW 75 kW 22 kW 22 kW 27.4 kW 33 kV·A 38 kV·A 58 kV·A 39 kV·A 48.7 kV·A
100 A 35 A 0.8 A 0.35 A 45 kW 22 kW 45 kW 55 kW 75 kW 22 kW 27.4 kW 33 kV-A 58 kV-A 73 kV-A 69 kV-A 22.4 kV-A 39 kV-A 48.7 kV-A 69 kV-A 1725 A; Use minimum cross-section acc. to AC-1 rated value 1 297 A; Use minimum cross-section acc. to AC-1 rated value 946 A; Use minimum cross-section acc. to AC-1 rated value 946 A; Use minimum cross-section acc. to AC-1 rated value 946 A; Use minimum cross-section acc. to AC-1 rated value 946 A; Use minimum cross-section acc. to AC-1 rated value 946 A; Use minimum cross-section acc. to AC-1 rated value 946 A; Use minimum cross-section acc. to AC-1 rated value 946 A; Use minimum cross-section acc. to AC-1 rated value
100 A 35 A 0.8 A 0.35 A 45 kW 22 kW 45 kW 55 kW 75 kW 22 kW 27.4 kW 33 kV-A 58 kV-A 73 kV-A 69 kV-A 48.7 kV-A 67.3 kV-A 1 725 A; Use minimum cross-section acc. to AC-1 rated value 1 297 A; Use minimum cross-section acc. to AC-1 rated value 946 A; Use minimum cross-section acc. to AC-1 rated value 946 A; Use minimum cross-section acc. to AC-1 rated value 946 A; Use minimum cross-section acc. to AC-1 rated value 946 A; Use minimum cross-section acc. to AC-1 rated value 946 A; Use minimum cross-section acc. to AC-1 rated value 946 A; Use minimum cross-section acc. to AC-1 rated value 946 A; Use minimum cross-section acc. to AC-1 rated value 946 A; Use minimum cross-section acc. to AC-1 rated value 946 A; Use minimum cross-section acc. to AC-1 rated value
100 A         35 A         0.8 A         0.35 A         45 kW         22 kW         45 kW         22 kW         45 kW         22 kW         27.4 kW         33 kV-A         58 kV-A         73 kV-A         69 kV-A         22.4 kV-A         39 kV-A         48.7 kV-A         67.3 kV-A         1 725 A; Use minimum cross-section acc. to AC-1 rated value         1 297 A; Use minimum cross-section acc. to AC-1 rated value         946 A; Use minimum cross-section acc. to AC-1 rated value         610 A; Use minimum cross-section acc. to AC-1 rated value
100 A         35 A         0.8 A         0.35 A         45 kW         22 kW         45 kW         22 kW         45 kW         22 kW         27.4 kW         33 kV-A         58 kV-A         73 kV-A         69 kV-A         22.4 kV-A         39 kV-A         48.7 kV-A         67.3 kV-A         1 725 A; Use minimum cross-section acc. to AC-1 rated value         1 725 A; Use minimum cross-section acc. to AC-1 rated value         10 A; Use minimum cross-section acc. to AC-1 rated value
100 A         35 A         0.8 A         0.35 A         45 kW         22 kW         45 kW         22 kW         55 kW         75 kW         22 kW         27.4 kW         33 kV-A         58 kV-A         73 kV-A         69 kV-A         22.4 kV-A         39 kV-A         48.7 kV-A         67.3 kV-A         1 725 A; Use minimum cross-section acc. to AC-1 rated value         1 297 A; Use minimum cross-section acc. to AC-1 rated value         946 A; Use minimum cross-section acc. to AC-1 rated value
100 A 35 A 0.8 A 0.35 A 45 kW 22 kW 45 kW 55 kW 75 kW 22 kW 27.4 kW 33 kV-A 58 kV-A 73 kV-A 69 kV-A 48.7 kV-A 49.7 kV-A 49.7 kV-A 40.7 k
100 A 35 A 0.8 A 0.35 A 45 kW 22 kW 45 kW 55 kW 75 kW 22 kW 27.4 kW 33 kV-A 58 kV-A 73 kV-A 69 kV-A 22.4 kV-A 39 kV-A 45 kV-A 50
100 A 35 A 0.8 A 0.35 A 45 KW 22 kW 45 kW 55 kW 75 kW 22 kW 27.4 kW 33 kV-A 58 kV-A 73 kV-A 69 kV-A 22.4 kV-A 39 kV-A 48.7 kV-A 67.3 kV-A
100 A 35 A 0.8 A 0.35 A 45 kW 22 kW 45 kW 55 kW 75 kW 22 kW 22 kW 22 kW 22 kW 22 kW 27.4 kW 27.4 kW 23 kV·A 58 kV·A 73 kV·A 58 kV·A 59 kV·A 48.7 kV·A
100 A 35 A 0.8 A 0.35 A 45 kW 22 kW 45 kW 55 kW 75 kW 22 kW 22 kW 22 kW 22 kW 22 kW 27.4 kW 27.4 kW 23 kV·A 58 kV·A 73 kV·A 58 kV·A 59 kV·A 48.7 kV·A
100 A 35 A 0.8 A 0.35 A 45 KW 22 kW 45 kW 55 kW 75 kW 22 kW 22 kW 27.4 kW 22 kW 27.4 kW 33 kV·A 58 kV·A 73 kV·A 59 kV·A
100 A 35 A 0.8 A 0.35 A 45 KW 22 kW 45 kW 55 kW 75 kW 22 kW 23 kV·A 33 kV·A 58 kV·A 73 kV·A 59 kV·A
100 A 35 A 0.8 A 0.35 A 45 KW 22 KW 45 KW 55 KW 75 KW 22 KW 23 KV·A 58 KV·A 58 KV·A 58 KV·A 58 KV·A
100 A 35 A 0.8 A 0.35 A 45 kW 22 kW 45 kW 55 kW 75 kW 22 kW 33 kV·A 58 kV·A 73 kV·A
100 A 35 A 0.8 A 0.35 A 45 kW 22 kW 45 kW 55 kW 75 kW 22 kW 33 kV-A 58 kV-A 73 kV-A
100 A 35 A 0.8 A 0.35 A 45 kW 22 kW 45 kW 55 kW 75 kW 22 kW 23 kV·A 33 kV·A 58 kV·A
100 A 35 A 0.8 A 0.35 A 45 kW 22 kW 45 kW 55 kW 75 kW 22 kW 33 kV·A
100 A 35 A 0.8 A 0.35 A 45 kW 22 kW 45 kW 55 kW 75 kW 22 kW
100 A 35 A 0.8 A 0.35 A 45 kW 22 kW 45 kW 55 kW 75 kW
100 A 35 A 0.8 A 0.35 A 45 kW 22 kW 45 kW 55 kW 75 kW
100 A 35 A 0.8 A 0.35 A 45 kW 22 kW 45 kW 55 kW 75 kW
100 A 35 A 0.8 A 0.35 A 45 kW 22 kW 45 kW 55 kW
100 A 35 A 0.8 A 0.35 A 45 kW 22 kW 45 kW 55 kW
100 A 35 A 0.8 A 0.35 A 45 kW 22 kW 45 kW 55 kW
100 A 35 A 0.8 A 0.35 A 45 kW 22 kW 45 kW
100 A 35 A 0.8 A 0.35 A 45 kW 22 kW
100 A 35 A 0.8 A 0.35 A 45 kW
100 A 35 A 0.8 A 0.35 A
100 A 35 A 0.8 A 0.35 A
100 A 35 A 0.8 A
100 A 35 A 0.8 A
100 A 35 A
100 A
100 A
0.16 A
0.42 A
7 A
100 A
100 A
0.06 A
0.15 A
1 A
2.5 A
40 A
40 A
4.5 A 2.6 A 40 A


rated value	24 V
operating range factor control supply voltage rated	
value of magnet coil at DC	
initial value	0.8
full-scale value	1.2
design of the surge suppressor	with varistor
inrush current peak	2.7 A
duration of inrush current peak	50 µs
locked-rotor current mean value	0.9 A
locked-rotor current peak	2.1 A
duration of locked-rotor current	150 ms
holding current mean value	40 mA
closing power of magnet coil at DC	25 W
holding power of magnet coil at DC	0.9 W
closing delay	
• at DC	50 70 ms
opening delay	
• at DC	38 57 ms
arcing time	10 20 ms
control version of the switch operating mechanism	Standard A1 - A2
Auxiliary circuit	
number of NC contacts for auxiliary contacts instantaneous contact	1
number of NO contacts for auxiliary contacts instantaneous contact	1
operational current at AC-12 maximum	10 A
operational current at AC-15	
<ul> <li>at 230 V rated value</li> </ul>	6 A
<ul> <li>at 400 V rated value</li> </ul>	3 A
<ul> <li>at 500 V rated value</li> </ul>	2 A
<ul> <li>at 690 V rated value</li> </ul>	1 A
operational current at DC-12	
<ul> <li>at 24 V rated value</li> </ul>	10 A
at 48 V rated value	6 A
at 60 V rated value	6 A
at 110 V rated value	3 A
at 125 V rated value	2 A
	1A
at 220 V rated value	
• at 600 V rated value	0.15 A
at 600 V rated value     operational current at DC-13	0.15 A
<ul> <li>at 600 V rated value</li> <li>operational current at DC-13</li> <li>at 24 V rated value</li> </ul>	0.15 A 10 A
<ul> <li>at 600 V rated value</li> <li>operational current at DC-13</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> </ul>	0.15 A 10 A 2 A
at 600 V rated value  operational current at DC-13      at 24 V rated value      at 48 V rated value      at 60 V rated value	0.15 A 10 A 2 A 2 A
<ul> <li>at 600 V rated value</li> <li>operational current at DC-13</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> </ul>	0.15 A 10 A 2 A 2 A 1 A
<ul> <li>at 600 V rated value</li> <li>operational current at DC-13</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> </ul>	0.15 A 10 A 2 A 2 A 1 A 0.9 A
<ul> <li>at 600 V rated value</li> <li>operational current at DC-13</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> </ul>	0.15 A 10 A 2 A 2 A 1 A 0.9 A 0.3 A
<ul> <li>at 600 V rated value</li> <li>operational current at DC-13</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> </ul>	0.15 A 10 A 2 A 2 A 1 A 0.9 A
at 600 V rated value  operational current at DC-13      at 24 V rated value      at 48 V rated value      at 60 V rated value      at 110 V rated value      at 125 V rated value      at 220 V rated value	0.15 A 10 A 2 A 2 A 1 A 0.9 A 0.3 A
at 600 V rated value  operational current at DC-13      at 24 V rated value      at 48 V rated value      at 60 V rated value      at 110 V rated value      at 125 V rated value      at 220 V rated value      at 600 V rated value      at 600 V rated value	0.15 A 10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A
at 600 V rated value  operational current at DC-13      at 24 V rated value      at 48 V rated value      at 60 V rated value      at 110 V rated value      at 125 V rated value      at 220 V rated value      at 600 V rated value      contact reliability of auxiliary contacts	0.15 A 10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A
at 600 V rated value      operational current at DC-13          at 24 V rated value          at 48 V rated value          at 60 V rated value          at 110 V rated value          at 125 V rated value          at 220 V rated value          at 600 V rated value          at 600 V rated value          but contact reliability of auxiliary contacts  UL/CSA ratings	0.15 A 10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A
at 600 V rated value  operational current at DC-13      at 24 V rated value      at 48 V rated value      at 60 V rated value      at 110 V rated value      at 125 V rated value      at 220 V rated value      at 600 V rated value      tat 600 V rated value      tul20 V rated value      tul20 V rated value      at 600 V rated value      tul20 V rated value      at 600 V rated value      tul20 V rated value      at 600 V rated value      at 600 V rated value      at 600 V rated value      tul20 V rated value      at 600 V rated value      tul20 V rated value      at 600 V rated value      tul20 V rated value      tul20 V rated value      at 600 V rated value      tul20 V rated value	0.15 A 10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
<ul> <li>at 600 V rated value</li> <li>operational current at DC-13</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> </ul>	0.15 A 10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA) 96 A
at 600 V rated value      operational current at DC-13          at 24 V rated value         at 48 V rated value         at 60 V rated value         at 110 V rated value         at 110 V rated value         at 125 V rated value         at 220 V rated value         at 600 V rated value          tull-load current (FLA) for 3-phase AC motor	0.15 A 10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA) 96 A
<ul> <li>at 600 V rated value</li> <li>operational current at DC-13</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> </ul>	0.15 A 10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA) 96 A
<ul> <li>at 600 V rated value</li> <li>operational current at DC-13 <ul> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> </ul> </li> <li>contact reliability of auxiliary contacts</li> <li>UL/CSA ratings</li> <li>full-load current (FLA) for 3-phase AC motor <ul> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>at 100 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> </ul> </li> </ul>	0.15 A 10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA) 96 A 77 A 10 hp
<ul> <li>at 600 V rated value</li> <li>operational current at DC-13</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>at 480 V rated value</li> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>at 200 V rated value</li> <li>at 200 V rated value</li> <li>at 110/120 V rated value</li> <li>at 230 V rated value</li> </ul>	0.15 A 10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA) 96 A 77 A
<ul> <li>at 600 V rated value</li> <li>operational current at DC-13</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>bit 100 V rated value</li> <li>contact reliability of auxiliary contacts</li> <li>UL/CSA ratings</li> <li>full-load current (FLA) for 3-phase AC motor</li> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>at 230 V rated value</li> <li>at 230 V rated value</li> <li>for 3-phase AC motor</li> </ul>	0.15 A 10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA) 96 A 77 A 10 hp 20 hp
<ul> <li>at 600 V rated value</li> <li>operational current at DC-13</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>contact reliability of auxiliary contacts</li> <li>UL/CSA ratings</li> <li>full-load current (FLA) for 3-phase AC motor <ul> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>at 230 V rated value</li> <li>at 230 V rated value</li> </ul> </li> </ul>	0.15 A 10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA) 96 A 77 A 10 hp

— at 460/480 V rated value	75 hp
— at 575/600 V rated value	75 hp
contact rating of auxiliary contacts according to UL	A600 / P600
Short-circuit protection	A000 / 1 000
design of the fuse link	
for short-circuit protection of the main circuit	
	gG: 250 A (690 V, 100 kA), aM: 160 A (690 V, 100 kA), BS88: 200 A
— with type of coordination 1 required	(415 V, 80 kA)
<ul> <li>— with type of assignment 2 required</li> </ul>	gG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88: 125 A (415 V, 80 kA)
<ul> <li>for short-circuit protection of the auxiliary switch required</li> </ul>	gG: 10 A (500 V, 1 kA)
Installation/ mounting/ dimensions	
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
fastening method	screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715
<ul> <li>side-by-side mounting</li> </ul>	Yes
height	140 mm
width	70 mm
depth	152 mm
required spacing	
<ul> <li>with side-by-side mounting</li> </ul>	
— forwards	20 mm
— upwards	10 mm
— downwards	10 mm
— at the side	0 mm
<ul> <li>for grounded parts</li> </ul>	
— forwards	20 mm
— upwards	10 mm
— at the side	10 mm
— downwards	10 mm
	10 mm
for live parts	20
— forwards	20 mm
— upwards	10 mm
— downwards	10 mm
— at the side	10 mm
Connections/ Terminals	
type of electrical connection	
<ul> <li>for main current circuit</li> </ul>	screw-type terminals
<ul> <li>for auxiliary and control circuit</li> </ul>	screw-type terminals
<ul> <li>at contactor for auxiliary contacts</li> </ul>	Screw-type terminals
of magnet coil	Screw-type terminals
type of connectable conductor cross-sections • for main contacts	
finally stranded with core end processing	2x (2.5 35 mm²), 1x (2.5 50 mm²)
at AWG cables for main contacts	2x (2.5 35 mm), 1x (2.5 30 mm) 2x (10 1/0), 1x (10 2)
connectable conductor cross-section for main	2A (10 1/0), 1A (10 2)
contacts	
• solid	2.5 16 mm <sup>2</sup>
<ul> <li>stranded</li> </ul>	6 70 mm²
<ul> <li>finely stranded with core end processing</li> </ul>	2.5 50 mm <sup>2</sup>
connectable conductor cross-section for auxiliary contacts	
<ul> <li>solid or stranded</li> </ul>	0.5 2.5 mm²
<ul> <li>finely stranded with core end processing</li> </ul>	0.5 2.5 mm <sup>2</sup>
type of connectable conductor cross-sections	
<ul> <li>for auxiliary contacts</li> </ul>	
— solid or stranded	2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²)
— finely stranded with core end processing	2x (0.5 1.5 mm <sup>2</sup> ), 2x (0.75 2.5 mm <sup>2</sup> )
and, changed with one one proceeding	

<ul> <li>at AWG cables for auxiliary contacts</li> </ul>	2x (20 16), 2x (18 14)		
AWG number as coded connectable conductor cross section for main contacts	10 2		
<ul> <li>AWG number as coded connectable conductor cross section for auxiliary contacts</li> </ul>	20 14		
Safety related data			
B10 value with high demand rate acc. to SN 31920	1 000 000		
proportion of dangerous failures			
<ul> <li>with low demand rate acc. to SN 31920</li> </ul>	40 %		
<ul> <li>with high demand rate acc. to SN 31920</li> </ul>	73 %		
failure rate [FIT] with low demand rate acc. to SN 31920	100 FIT		
product function			
<ul> <li>mirror contact acc. to IEC 60947-4-1</li> </ul>	Yes		
<ul> <li>positively driven operation acc. to IEC 60947-5-1</li> </ul>	No		
T1 value for proof test interval or service life acc. to	20 у		
IEC 61508			
protection class IP on the front acc. to IEC 60529	IP20		
touch protection on the front acc. to IEC 60529	finger-safe, for vertical cont	act from the front	
suitability for use safety-related switching OFF	Yes		
Certificates/ approvals			
General Product Approval			EMC
	KC	EHC	RCM
Declaration of Conformity Test Certifica	ates	Marine / Shipping	
Declaration of Conformity Test Certification	est <u>Type Test</u>	Marine / Shipping	Llovds Register uis
CE <u>Miscellaneous</u> <u>Special Te</u> <u>Certificate</u>	<u>e Certificates/Test</u>	Marine / Shipping	Lis Railway
Miscellaneous Special Te Certificate EG-Konf.	<u>e Certificates/Test</u>	ABS	
Miscellaneous Special Te Certificate EG-Konf.	est <u>Certificates/Test</u> <u>Report</u>	ABS	Railway

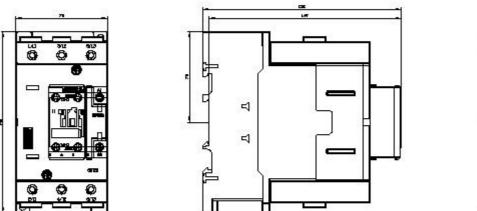



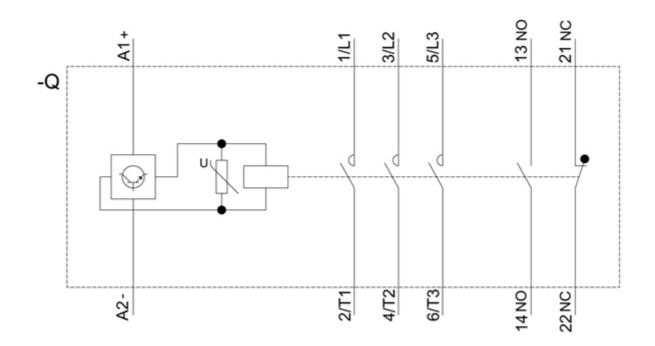

last modified:

12/21/2020 🖸