

Cat6 Outdoor Unshielded

23AWG • 4 Twisted Pairs • CMX U/UTP • 550MHz • Solid Copper



Lengths Available

- 500ft
- 1000ft

Jacket Colors



Key Features

- Bandwidth tested up to 550 MHz
- Suitable for 1 and 5 Gigabit speed up to 328 feet
- In compliance with ANSI/TIA 568.2-D
- CMX jacket can withstand sunlight, dirt, snow, and moisture
- Supports Power over Ethernet: PoE/PoE+/PoE++ (IEEE 802.3af/at/bt) 4PPoE up to 100W
- Sequential footage markings every 2ft

Technical Data

Insulation	PE
Average Thickness (mm)	0.22
Min Point Thickness (mm)	0.20
Conductor Insulation Dia. (±0.02mm)	1.01
Twisted Pair Dia. (±0.02mm)	2.02
Ripcord	Nylon
Spline	Present
Polyethylene Tape	Present
Shielding	U/UTP
Water Resistance	Jacket Only

Conductor	Solid Bare Copper
Size	23AWG
Conductor Dia. (±0.05mm)	0.57

Standards Reference

UL-444 / cETLus

ANSI/TIA 568-2.D


ISO/IEC 11801

Color of Pairs

Pair 1	Blue- White/Blue
Pair 2	Orange- White/Orange
Pair 3	Green- White/Green
Pair 4	Brown- White/Brown

Cable Jacket

Cable Jacket	LLDPE
Average Thickness (mm)	0.60
Min. Point Thickness (mm)	0.55
Outer Diameter (±0.2mm)	6.30

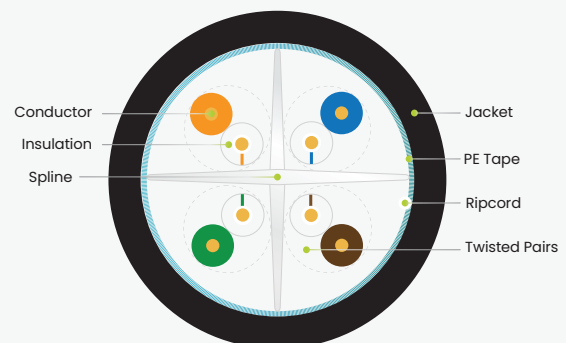

Print Legend

trueCABLE CAT6 CMX U/UTP OUTDOOR UV 75°C 4PR 23AWG c(ETL)us VERIFIED to ANSI/TIA 568-2.D 550MHz ROHS-3 XXXXFT MM/YY

Cat6 Outdoor Unshielded

23AWG • 4 Twisted Pairs • CMX
U/UTP • 550MHz • Solid Copper



Lengths Available

- 500ft
- 1000ft

Jacket Colors



Electrical Characteristics

PoE Certification	PoE/PoE+/PoE++ 4PPoE
Maximum PoE Wattage	100W
PoE Application Compatibility	802.3af/at/bt Type 4
TIA 568-2.D Cat6 Permanent Link +PoE	CERTIFIED
Maximum Application Speed @ 295ft	5GBASE-T
Nominal Velocity of Propagation (NVP)	69.8
Maximum Operating Voltage	300V
1.0 - 550MHz Impedance (Ω)	100 \pm 15
Maximum Operating Frequency	550MHz
1.0 - 550MHz Delay Skew (ns/100m)	\leq 45
Pair-to-Ground Capacitance Unbalance (pF/km)	\leq 3300
Max. Conductor DC Resistance 20°C (Ω /km)	68



Mechanical & Environmental Operating Parameters

Test Object	Jacket	Aging Condition (°C x hrs)	100 x 168
Test Material	LLDPE	After Tensile Strength (Mpa)	\geq 85% of unaged
Before- Tensile Strength (Mpa)	\geq 13.8	Aging Condition - Elongation (%)	\geq 50% of unaged
Aging- Elongation (%)	\geq 100	Cold Bend (-20 \pm 2°C x 4hrs)	No Crack
Min. Bend Radius	3.0cm/1.25in	Operating & Storage Temp.	-40°C to 75°C -40°F to 167°F
Max. Installation Tension	110N/25lb-ft	Installation Temp.	-20°C to 75°C -4°F to 167°F

Tested Compatible Accessories

Product

Part Number

Cat6 Punch Down Keystone Jack | Unshielded

6EPD90CMPT

Cat6 Toolless Keystone Jack | Unshielded

6ETL90CMPT

Cat6/6A Pass Through RJ45 Connectors | Unshielded

MDPTRJ45

Cat6/6A Standard RJ45 Connectors | Unshielded

LGRJ45

Large Cut-to-Fit RJ45 Strain Relief Boot | 5.5 - 7mm

LGCTF

Cat6A Field Term Plug | Unshielded

6AFT



Cable ID: 6ECMXUV UTP TLESS KSJ > UTP TLESS KSJ

Test Limit: TIA Cat 6 Perm. Link (+PoE)

Limits Version: V7.5

Date / Time: 07/08/2021 12:30:30 PM

Operator: DON S

Headroom 4.6 dB (NEXT 3,6-7,8)

Cable Type: Cat 6 U/UTP

NVP: 69.8%

Main: Versiv

S/N: 1924100

Software Version: V6.5 Build 5

Calibration Date: 11/14/2020

Adapter: DSX-8000 (DSX-PLA804)

S/N: 4523168

Test Summary: PASS

Remote: Versiv

S/N: 1917273


Software Version: V6.5 Build 5

Calibration Date: 11/14/2020


Adapter: DSX-8000R (DSX-PLA804)

S/N: 4523169


Length (ft), Limit 295	[Pair 7,8]	294
Prop. Delay (ns), Limit 498	[Pair 4,5]	446
Delay Skew (ns), Limit 44	[Pair 4,5]	18
Resistance (ohms), Limit 21.00	[Pair 4,5]	13.04
Resist. Unbal. (ohms), Limit 0.380	[Pair 1,2]	0.017
Resist. P2P Unbal. (ohms), Limit 0.450	[Pair 4,5-7,8]	0.075
Insertion Loss Margin (dB)	[Pair 4,5]	6.4
Frequency (MHz)	[Pair 4,5]	250.0
Limit (dB)	[Pair 4,5]	31.1



Wire Map (T568B)


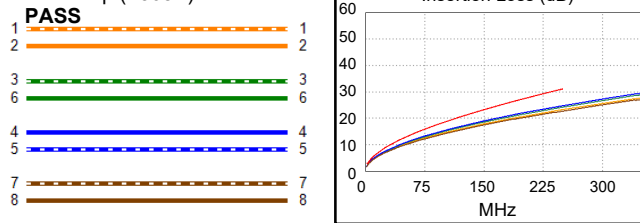


Insertion Loss (dB)





Worst Case Margin Worst Case Value



PASS	MAIN	SR	MAIN	SR
Worst Pair	1,2-4,5	3,6-7,8	1,2-4,5	3,6-7,8
NEXT (dB)	5.1	4.6	5.9	4.6
Freq. (MHz)	213.0	212.5	239.0	212.5
Limit (dB)	36.5	36.5	35.7	36.5
Worst Pair	3,6	3,6	1,2	3,6
PS NEXT (dB)	6.6	6.2	7.4	6.2
Freq. (MHz)	196.0	212.5	239.0	212.5
Limit (dB)	34.5	33.9	33.0	33.9





PASS	MAIN	SR	MAIN	SR
Worst Pair	1,2-4,5	1,2-4,5	1,2-3,6	1,2-4,5
ACR-F (dB)	8.8	8.6	11.1	8.7
Freq. (MHz)	145.0	150.0	217.5	153.0
Limit (dB)	21.0	20.7	17.4	20.5
Worst Pair	1,2	1,2	1,2	1,2
PS ACR-F (dB)	10.3	10.2	13.2	13.1
Freq. (MHz)	153.5	152.0	226.0	217.5
Limit (dB)	17.5	17.6	14.1	14.4



N/A	MAIN	SR	MAIN	SR
Worst Pair	1,2-4,5	1,2-4,5	1,2-4,5	1,2-4,5
ACR-N (dB)	8.4	11.0	11.9	13.7
Freq. (MHz)	38.3	212.0	239.0	247.0
Limit (dB)	37.5	8.2	5.4	4.5
Worst Pair	4,5	1,2	4,5	4,5
PS ACR-N (dB)	10.5	11.7	14.1	14.8
Freq. (MHz)	38.5	7.1	241.5	246.5
Limit (dB)	35.0	53.1	2.5	2.0



PASS	MAIN	SR	MAIN	SR
Worst Pair	7,8	7,8	7,8	1,2
RL (dB)	5.1	3.9	10.6	11.2
Freq. (MHz)	6.3	6.3	207.0	242.0
Limit (dB)	21.0	21.0	10.8	10.2



Compliant Network Standards:
 10BASE-T 100BASE-TX 100BASE-T4
 1000BASE-T 2.5GBASE-T 5GBASE-T
 ATM-25 ATM-51 ATM-155
 100VG-AnyLan TR-4 TR-16 Active
 TR-16 Passive