SIEMENS

Data sheet 3RU2126-4AB0



Overload relay 11...16 A Thermal For motor protection Size S0, Class 10 Contactor mounting Main circuit: Screw Auxiliary circuit: Screw Manual-Automatic-Reset

| product brand name | SIRIUS |
|--|------------------------|
| product designation | thermal overload relay |
| product type designation | 3RU2 |
| General technical data | |
| size of overload relay | S0 |
| size of contactor can be combined company-specific | S0 |
| power loss [W] for rated value of the current at AC in hot operating state | 8.1 W |
| • per pole | 2.7 W |
| insulation voltage with degree of pollution 3 at AC rated value | 690 V |
| surge voltage resistance rated value | 6 kV |
| maximum permissible voltage for safe isolation in networks with grounded star point | |
| between auxiliary and auxiliary circuit | 440 V |
| between auxiliary and auxiliary circuit | 440 V |
| between main and auxiliary circuit | 440 V |
| between main and auxiliary circuit | 440 V |
| shock resistance acc. to IEC 60068-2-27 | 8g / 11 ms |
| type of protection according to ATEX directive 2014/34/EU | Ex II (2) GD |
| certificate of suitability according to ATEX directive 2014/34/EU | DMT 98 ATEX G 001 |
| reference code acc. to IEC 81346-2 | F |
| Substance Prohibitance (Date) | 01.10.2009 00:00:00 |
| Ambient conditions | |
| installation altitude at height above sea level maximum | 2 000 m |
| ambient temperature | |
| during operation | -40 +70 °C |
| during storage | -55 +80 °C |
| during transport | -55 +80 °C |
| temperature compensation | 40 +60 °C |
| relative humidity during operation | 10 95 % |
| Main circuit | |
| number of poles for main current circuit | 3 |
| adjustable current response value current of the current-dependent overload release | 11 16 A |
| operating voltage | |
| rated value | 690 V |

| at AC-3 rated value maximum | 690 V |
|---|---|
| operating frequency rated value | 50 60 Hz |
| operational current rated value | 16 A |
| operating power at AC-3 | |
| at 400 V rated value | 7.5 kW |
| at 500 V rated value | 7.5 kW |
| at 690 V rated value | 11 kW |
| Auxiliary circuit | |
| design of the auxiliary switch | integrated |
| number of NC contacts for auxiliary contacts | 1 |
| • note | for contactor disconnection |
| number of NO contacts for auxiliary contacts | 1 |
| • note | for message "Tripped" |
| number of CO contacts for auxiliary contacts | 0 |
| operational current of auxiliary contacts at AC-15 | · · |
| • at 24 V | 3 A |
| • at 110 V | 3 A |
| | 3 A |
| • at 120 V | |
| • at 125 V | 3 A |
| • at 230 V | 2 A |
| • at 400 V | 1 A |
| operational current of auxiliary contacts at DC-13 | |
| ● at 24 V | 2 A |
| • at 60 V | 0.3 A |
| • at 110 V | 0.22 A |
| • at 125 V | 0.22 A |
| • at 220 V | 0.11 A |
| contact rating of auxiliary contacts according to UL | B600 / R300 |
| Protective and monitoring functions | |
| | |
| trip class | CLASS 10 |
| trip class design of the overload release | CLASS 10 thermal |
| <u> </u> | |
| design of the overload release UL/CSA ratings | |
| design of the overload release | |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor | thermal |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value | thermal 16 A |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection | thermal 16 A |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link | thermal 16 A 16 A |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection | thermal 16 A |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required | thermal 16 A 16 A |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions | thermal 16 A 16 A fuse gG: 6 A, quick: 10 A |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position | thermal 16 A 16 A fuse gG: 6 A, quick: 10 A any |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method | thermal 16 A 16 A fuse gG: 6 A, quick: 10 A any Contactor mounting |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height | thermal 16 A 16 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width | thermal 16 A 16 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth | thermal 16 A 16 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals | thermal 16 A 16 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth | thermal 16 A 16 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product function removable terminal for auxiliary and control circuit | thermal 16 A 16 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product function removable terminal for auxiliary and | thermal 16 A 16 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product function removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit | thermal 16 A 16 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No No |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product function removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit | thermal 16 A 16 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No No screw-type terminals screw-type terminals |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product function removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit | thermal 16 A 16 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No No |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product function removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current | thermal 16 A 16 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No No screw-type terminals screw-type terminals |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product function removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit | thermal 16 A 16 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No No screw-type terminals screw-type terminals |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product function removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections | thermal 16 A 16 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No No screw-type terminals screw-type terminals |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product function removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts | thermal 16 A 16 A 16 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No No screw-type terminals screw-type terminals Top and bottom |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product function removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts — solid or stranded | thermal 16 A 16 A 16 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No No screw-type terminals screw-type terminals Top and bottom 2x (1 2,5 mm²), 2x (2,5 10 mm²) |

| 2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²) |
|--|
| 2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²) |
| 2x (20 16), 2x (18 14) |
| |
| 2 2.5 N·m |
| 0.8 1.2 N·m |
| Diameter 5 6 mm |
| Pozidriv PZ 2 |
| |
| M4 |
| M3 |
| |
| 50 FIT |
| 2 280 y |
| 20 y |
| IP20 |
| finger-safe, for vertical contact from the front |
| |
| Slide switch |
| |
| |











For use in hazardous locations



Declaration of Conformity

General Product Approval

Test Certificates

Marine / Shipping

Miscellaneous



Type Test Certificates/Test Report

Special Test Certificate





Marine / Shipping

Lloyd's Register









Confirmation

other

Railway

Vibration and Shock

Further information

Information- and Downloadcenter (Catalogs, Brochures,...) https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RU2126-4AB0

Cax online generator

 $\underline{\text{http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3RU2126-4AB0}$

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RU2126-4AB0


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RU2126-4AB0&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RU2126-4AB0/char

Further characteristics (e.g. electrical endurance, switching frequency)
http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RU2126-4AB0&objecttype=14&gridview=view1



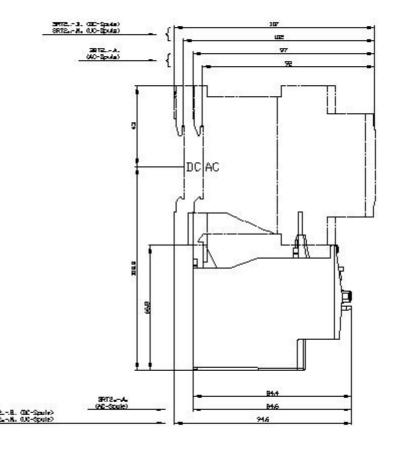

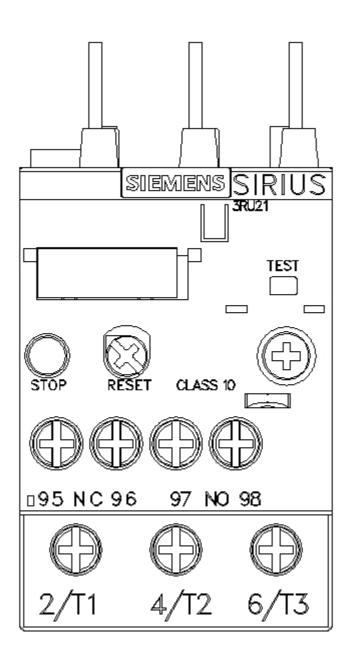

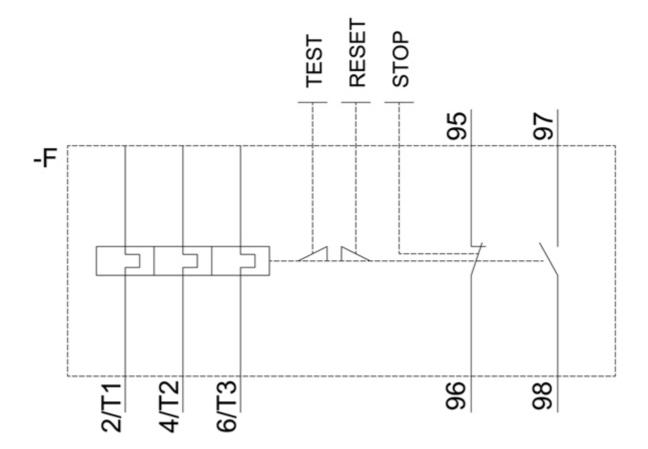

last modified: 12/15/2020 🖸