

Cat6 Riser Unshielded

23AWG • 4 Twisted Pairs • CMR
U/UTP • 550MHz • Solid Copper



Lengths Available

- 500ft
- 1000ft



Key Features

- Bandwidth tested up to 550 MHz
- Suitable for 1 Gigabit and 5 Gigabit Ethernet up to 328 ft
- In compliance with ANSI/TIA 568.2-D
- RoHS-3 Compliant
- Easily identified color striped pairs
- Supports Power over Ethernet: PoE/PoE+/PoE++ (IEEE 802.3af/at/bt) 4PPoE up to 90W
- Sequential footage markings every 2ft

Technical Data

Insulation	PE
Average Thickness (mm)	0.21
Min Point Thickness (mm)	0.193
Conductor Insulation Dia. (±0.02mm)	0.96
Twisted Pair Dia. (±0.02mm)	1.92
Ripcord	Nylon
Spline	Present
Polyethylene Tape	Not Present
Shielding	U/UTP

Conductor	Solid Bare Copper
Size	23AWG
Conductor Dia. (±0.05mm)	0.54

Color of Pairs	
Pair 1	Blue- White/Blue
Pair 2	Orange- White/Orange
Pair 3	Green- White/Green
Pair 4	Brown- White/Brown


Cable Jacket	PVC
Average Thickness (mm)	0.60
Min. Point Thickness (mm)	0.55
Outer Diameter (±0.2mm)	5.90

Standards Reference

UL-444 /
cETLus

ANSI/TIA
568-2.D

ISO/IEC
11801

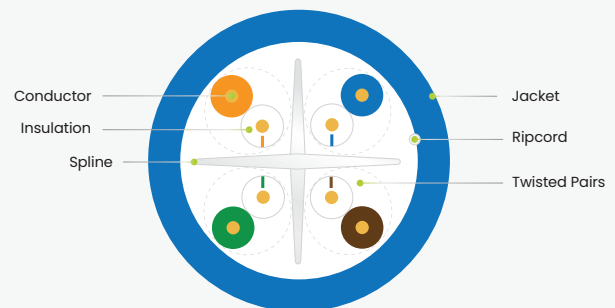

Print Legend

trueCABLE Cat6 CMR U/UTP 75°C 4PR 23AWG c(ETL)us VERIFIED to ANSI/TIA 568.2-D Category 6 550MHz RoHS-3 XXXXFT MM/YY


Cat6 Riser Unshielded

23AWG • 4 Twisted Pairs • CMR
U/UTP • 550MHz • Solid Copper




Lengths Available

- 500ft
- 1000ft



Electrical Characteristics

PoE Certification	PoE/PoE+/PoE++ 4PPoE
Maximum PoE Wattage	90W
PoE Application Compatibility	802.3af/at/bt Type 4
TIA 568-2.D Cat6 Permanent Link +PoE	CERTIFIED
Maximum Application Speed @ 295ft	5GBASE-T
Nominal Velocity of Propagation (NVP)	68.2
Maximum Operating Voltage	300V
1.0 - 550MHz Impedance (Ω)	100 \pm 15
Maximum Operating Frequency	550MHz
1.0 - 550MHz Delay Skew (ns/100m)	\leq 45
Pair-to-Ground Capacitance Unbalance (pF/km)	\leq 3300
Max. Conductor DC Resistance 20°C (Ω /km)	72.2

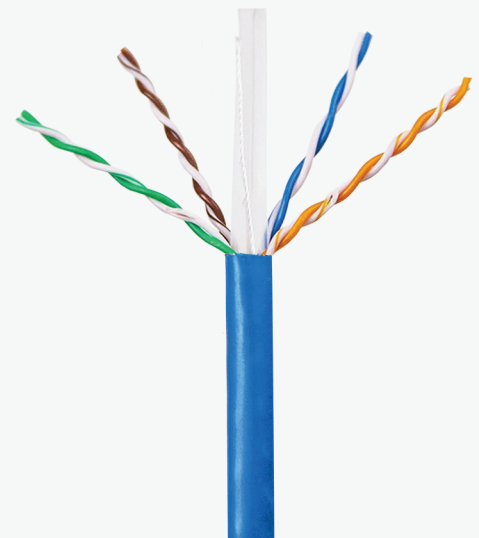

Mechanical & Environmental Operating Parameters

Test Object	Jacket	Aging Condition ($^{\circ}\text{C} \times \text{hrs}$)	100 x 168
Test Material	PVC	After Tensile Strength (Mpa)	\geq 85% of unaged
Before- Tensile Strength (Mpa)	\geq 13.8	Aging Condition - Elongation (%)	\geq 50% of unaged
Aging- Elongation (%)	\geq 100	Cold Bend ($-20 \pm 2^{\circ}\text{C} \times 4\text{hrs}$)	No Crack
Min. Bend Radius	2.5cm/1.0in	Operating & Storage Temp.	-40°C to 75°C -40°F to 167°F
Max. Installation Tension	110N/25lb-ft	Installation Temp.	-20°C to 75°C -4°F to 167°F

Tested Compatible Accessories

Product

Cat6 Punch Down Keystone Jack | Unshielded

Part Number

6EPD90CMPT

Cat6 Toolless Keystone Jack | Unshielded

6ETL90CMPT

Cat6/6A Pass Through RJ45 Connectors | Unshielded

MDPTRJ45

Cat6/6A Standard RJ45 Connectors | Unshielded

LGRJ45

Large Cut-to-Fit RJ45 Strain Relief Boot | 5.5 - 7mm

LGCTF

Cat6A Field Term Plug | Unshielded

6AFT



Cable ID: 6ECMR MPTL UTP PD KSJ TO PASS-THROUGH RJ45



Test Summary: PASS

Test Limit: TIA Cat 6 MPTL (+PoE)
Limits Version: V7.5
Date / Time: 03/03/2020 01:49:57 PM
Operator: DON S
Headroom 7.2 dB (NEXT 3,6-7,8)
Cable Type: *trueCABLE Cat6 U/UTP*
NVP: 68.2%

Main: Versiv
S/N: 1917273
Software Version: V6.5 Build 5
Calibration Date: 11/08/2019
Adapter: DSX-8000 (DSX-PLA804)
S/N: 4523168



Remote: Versiv
S/N: 1924100
Software Version: V6.5 Build 5
Calibration Date: 11/08/2019
Adapter: DSX-8000R (DSX-PC6)
S/N: 4716104

Length (ft), Limit 295	[Pair 4,5]	293
Prop. Delay (ns), Limit 498	[Pair 7,8]	461
Delay Skew (ns), Limit 44	[Pair 7,8]	24
Resistance (ohms)	[Pair 7,8]	14.21
Resist. Unbal. (ohms)	[Pair 4,5]	0.036
Resist. P2P Unbal. (ohms)	[Pair 4,5-7,8]	0.144
Insertion Loss Margin (dB)	[Pair 7,8]	1.4
Frequency (MHz)	[Pair 7,8]	250.0
Limit (dB)	[Pair 7,8]	31.1

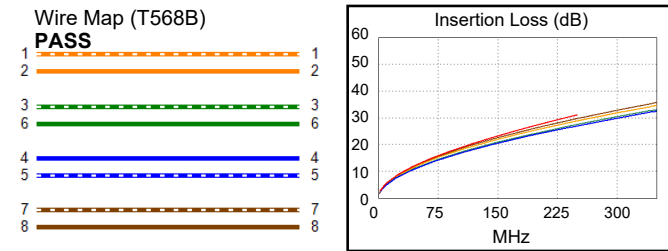



Worst Case Margin Worst Case Value

PASS	MAIN	SR	MAIN	SR
Worst Pair	3,6-7,8	1,2-4,5	3,6-7,8	1,2-4,5
NEXT (dB)	7.2	10.0	7.3	10.0
Freq. (MHz)	224.5	244.5	246.0	244.5
Limit (dB)	36.1	35.5	35.5	35.5





Worst Pair	7,8	3,6	7,8	3,6
PS NEXT (dB)	8.3	9.7	8.6	9.9
Freq. (MHz)	221.5	234.0	246.5	250.0
Limit (dB)	33.6	33.2	32.8	32.7



PASS	MAIN	SR	MAIN	SR
Worst Pair	4,5-1,2	1,2-4,5	4,5-1,2	4,5-1,2
ACR-F (dB)	11.6	11.8	12.5	12.7
Freq. (MHz)	4.4	4.4	246.5	242.0
Limit (dB)	51.4	51.4	16.4	16.5



Worst Pair	1,2	4,5	1,2	1,2
PS ACR-F (dB)	14.1	14.0	14.5	14.4
Freq. (MHz)	3.0	3.9	246.5	241.5
Limit (dB)	51.6	49.4	13.4	13.5

N/A	MAIN	SR	MAIN	SR
Worst Pair	3,6-7,8	3,6-7,8	3,6-7,8	3,6-7,8
ACR-N (dB)	8.0	10.5	8.7	13.6
Freq. (MHz)	100.0	89.3	246.0	243.5
Limit (dB)	23.3	25.2	4.6	4.9



Worst Pair	7,8	7,8	7,8	3,6
PS ACR-N (dB)	9.2	12.3	9.9	13.5
Freq. (MHz)	99.8	10.5	246.5	250.0
Limit (dB)	20.8	49.5	2.0	1.6

PASS	MAIN	SR	MAIN	SR
Worst Pair	4,5	4,5	4,5	4,5
RL (dB)	6.5	3.5	13.5	3.5
Freq. (MHz)	3.9	50.0	230.5	50.0
Limit (dB)	21.0	17.0	10.4	17.0



Compliant Network Standards:
 10BASE-T 100BASE-TX 100BASE-T4
 1000BASE-T 2.5GBASE-T 5GBASE-T
 ATM-25 ATM-51 ATM-155
 100VG-AnyLan TR-4 TR-16 Active
 TR-16 Passive