

PN: CL-VPFX-XXXX

Thank you for purchasing CLEANLIFE® LED Lighting Fixtures.

**TROUBLESHOOTING:**

- Check that line voltage at fixture is correct.
- Ensure that there is voltage at lamp fixture wires.
- Check that fixture is grounded properly.

*If fixture does not light:*

- Check switch to ensure that there are no defects.
- Check fuse/circuit breaker for trips, then check wiring connections.

**CLEANING AND MAINTENANCE:**

- CAUTION: Ensure fixture temperature is cool enough to touch. DO NOT clean or perform maintenance while fixture is energized.
- Clean lens and fixture with non-abrasive cleaning solution.
  - Do not open fixture to clean LED. Do not touch the LED.
  - Do not spray liquid directly on the LED, LED driver or wiring.

Please read carefully and save these instructions as you may need them at a later date.

Please follow the following steps for installation. ➔

**WARNINGS:**



Turn power off before installation, inspection, or removal. Use all necessary precautions while performing this procedure.



Consult a qualified electrician to ensure correct branch circuit conductor. Min 90°C supply conductors.



Properly ground electrical enclosure. IT IS IMPERATIVE THAT THE OUTLET BOX BE PROPERLY GROUNDED.



DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS, OTHERWISE SAFETY WILL BE COMPROMISED.



This Integrated LED Fixture has no lamp/bulb to replace.

**GENERAL:** All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections, contact and obtain the services of a qualified electrician. Use UL or IEC approved wire only for input/output connections.

Remove fixture and mounting components from the box, and make sure that no parts are missing by referencing the illustration in the installation instructions.

**NOT DIMMING COMPATIBLE:** This product is not compatible with dimmers. Fixture performance could be compromised by wiring fixture with dimmer. DO NOT USE WITH DIMMER(S)!

**CLEANLIFE® LED VAPOR TIGHT JELLY JAR FIXTURE**

INSTALLATION INSTRUCTIONS

1-800-316-2532

www.cleanlifeled.com

Figure 1


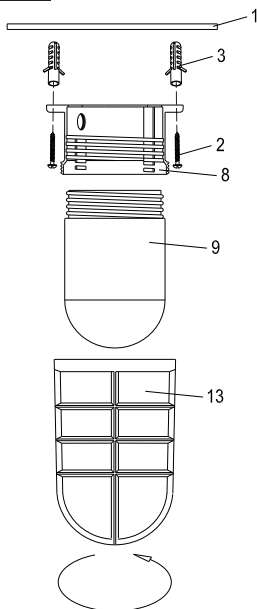


Figure 2



1. MOUNTING SURFACE
2. MOUNTING SCREWS
3. WALL ANCHORS
4. WHITE SUPPLY WIRE
5. BLACK SUPPLY WIRE
6. SUPPLY GROUND WIRE
7. WIRE NUTS
8. FIXTURE BASE
9. LENS
10. WHITE FIXTURE WIRE
11. BLACK FIXTURE WIRE
12. FIXTURE GROUND WIRE
13. LENS GUARD

- 1** SHUT OFF MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER!
- 2** Remove contents from box.
- 3** Locate SUPPLY WIRES (4 & 5) and the SUPPLY GROUND WIRE (6) from the OUTLET BOX.
- 4** Align the FIXTURE BASE (8) to the MOUNTING SURFACE (1). Mark the location of each key slot of the FIXTURE BASE (8) on the MOUNTING SURFACE (1).
- 5** Remove the FIXTURE BASE (8) from the MOUNTING SURFACE (1) and drill 1/4" holes at each of the marked key slot locations from (STEP 4). Into each hole, carefully insert an included WALL ANCHOR (3).
- 6** Make the following wire connections (Fig.2) using the provided WIRE NUTS (7):  
 WHITE (-) SUPPLY WIRE (4) TO WHITE FIXTURE WIRE (10)  
 BLACK (+) SUPPLY WIRE (5) TO BLACK FIXTURE WIRE (11)  
 SUPPLY GROUND WIRE (6) TO FIXTURE GROUND WIRE (12)  
 If necessary, wrap all wire connections in electrical tape to ensure a secure connection.

- 7** Carefully tuck all wiring into the OUTLET BOX.
- 8** Align FIXTURE BASE (8) over the WALL ANCHORS (3) and onto the MOUNTING SURFACE (1), making sure that the MOUNTING SCREWS (2) can be threaded through the key slots.  
  
*Note: For wet locations, the installation gasket may be applied to the FIXTURE BASE (8) prior to attaching onto the MOUNTING SURFACE (1).*
- 9** Feed the MOUNTING SCREWS (2) through the key slots of the FIXTURE BASE (8) and thread them into the WALL ANCHORS (3) from (Step 5) until the FIXTURE BASE (8) is flush against the MOUNTING SURFACE (1).
- 10** Attach LENS (9) by threading it onto the FIXTURE BASE (8), and rotate until secure.
- 11** Attach LENS GUARD (13) by threading it on to the FIXTURE BASE (8), and rotate until secure.
- 12** Restore power. Check operation of Integrated LED Fixture.
- 13** Installation complete.

**5-YEAR LIMITED WARRANTY**

CLEANLIFE® LED Vapor Tight Jelly Jar Fixtures are warranted to be free and clear of defects in materials and workmanship for a period of five years from the date of purchase. This warranty covers defects in manufacturing discovered while using the product as recommended by the manufacturer and does not apply to failures caused by acts of God or as a result of any abuse, misuse, abnormal use, or use in violation of any applicable standard, code, or instructions for use in installations.

The foregoing warranty constitutes the sole and exclusive remedy of the purchaser and the sole liability of CLEANLIFE ENERGY of CLEANLIFE® LED Vapor Tight Jelly Jar Fixtures. NO WARRANTIES OF PERFORMANCE, MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE IS MADE EXPRESSLY, ORALLY, OR IMPLICITLY BY CLEANLIFE ENERGY. In no event shall CLEANLIFE ENERGY be liable for any other costs or damages, including lost profits, indirect, incidental, consequential, special, or punitive damages.

If a CLEANLIFE® LED Vapor Tight Jelly Jar Fixture fails due to a defect covered by this warranty, CLEANLIFE ENERGY will, at its option, either replace the product or provide a credit equal to the current price CLEANLIFE ENERGY charges for the product. To make a warranty claim, retain the failed products, and notify a CLEANLIFE ENERGY sales representative in writing within thirty (30) days of the failure.

For more information, please contact us at:

**CLEANLIFE ENERGY LLC**  
 2400 Superior Avenue, Suite 207  
 Cleveland, Ohio 44114  
 1-800-316-2532  
 www.cleanlifeled.com



© 2019 Superior Ventures LLC. All rights reserved.