



| USER GUIDE |



| WHAT'S IN THE BOX? |

Handheld Mic x 2



AU USB Power Adapter



Foam Windscreen x 2



3.5mm to 2RCA Audio Cable



6.35mm Connector Cable



3.5mm Connector Cable



Receiver
(Black, Gold or Pink)



CONTROL PANEL



RECEIVER FRONT

- 1 Power Button
- 2 Volume Control for Wireless Microphone A
- 3 Volume Control for Wireless Microphone B
- 4 Volume Control for Wired Microphone
- 5 Bass Control
- 6 Treble Control
- 7 Echo Control
- 8 Volume Control for Music
- 9 6.35mm Wired Microphone Input for 3rd Vocalist
- 10 USB Input
- 11 Music Control
- 12 Display

CONTROL PANEL



RECEIVER BACK

- 13 RCA Input
- 14 RCA Output
- 15 6.35mm Audio Output
- 16 Power Input
- 17 Antenna



INSTRUCTION

| SONIO PRO RECEIVER |

Connect Receiver with the USB Power adapter to charge.
Press the Power button to turn on the Receiver.
The Power indicator is on when Receiver is turned on.



| SONIO PRO MICROPHONES |

Connect Microphones with the USB Power adapter to charge.



Press the Power button to turn on Microphones.
The LED lighting and the display are turned on.



INSTRUCTION

| SONIO PRO RECEIVER & MICROPHONES |

Microphones connect with the Receiver automatically. When RF indicator is on, it indicates Microphones connect with the Receiver successfully.




| NOTE |

- 1 When Microphones have low battery, the LED lights will blink red
- 2 When Receiver has low battery, the Power indicator will blink
- 3 When Microphones are charging, the LED lights will turn to red
- 4 When Receiver is charging, the Power indicator will blink
- 5 Connect Receiver to an Audio Output Devices (e.g. Soundbar, Speaker, Home Theater, Recording devices) for Audio Output

INPUT AND OUTPUT

- 1 Input:** Connect an Audio Input Device (e.g. TV, Laptop or Phone) to stream background music for your speech or singing
- 2 Output:** Connect an Audio Output Device (e.g. Soundbar, Speaker Home Theater or PA System) for Audio Output

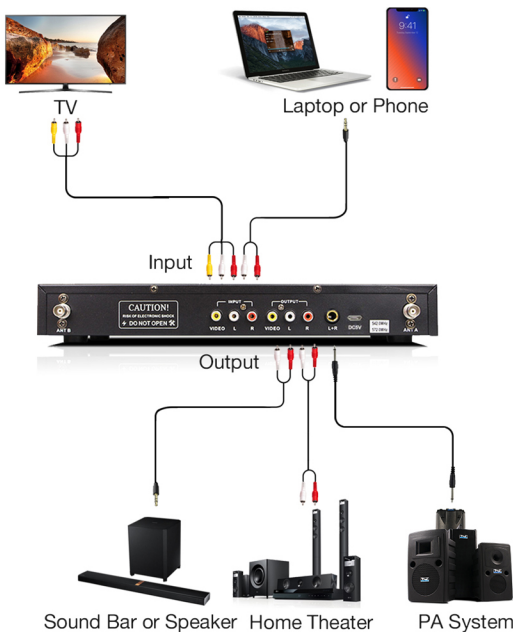

* Additional cables or converters may be required, depending on your Audio Output and Audio Input devices

SET UP SONIO PRO FOR KARAOKE



- 1 Connect your SONIO PRO Receiver **Audio Input** to an Audio Input Device (e.g. TV/Projector) **Audio Output**
- 2 Connect your SONIO PRO Receiver **Audio Output** to an Audio Output Device (e.g. Soundbar/Speaker/Home Theatre System) **Audio Input**
- 3 Cast songs from YouTube directly; OR play music from your phone via Bluetooth; OR play music from a USB device
- 4 Enjoy your home karaoke

* Additional cables or converters may be required, depending on your Audio Output and Audio Input devices

FEATURES

RECEIVER

- Receiving frequency: UHF 600-690MHZ
- Frequency stability: <0.002%
- Sensitivity: 2/MV
- Adjacent channel interference ratio: >90DB
- Mirror interference ratio: >88DB
- SNR: >95DB
- Audio output: 0-300MV
- Working range: up to 80 meters
- Accepted channel: 2 channels
- Power supply voltage: AC/100-240V
- Bluetooth: 4.2
- Antenna: External antenna

MICROPHONE

- Carrier frequency: UHF 600-690MHZ
- Frequency stability: <0.002%
- Transmit power: 10MV
- Current consumption: <25MA
- Subharmonic: <main wave 40DB
- System: fixed frequency
- Pickup: 600Ω
- Single finger battery: 1.5V battery

PRODUCT DETAIL

Manufactured by	SONIO
Model	
Package Size	44 x 33 x 9cm
Package Weight	3.00KG



