



INSTALLATION INSTRUCTION FOR PENDANT LAMP

SAFETY PRECAUTIONS:

1. TURN OFF ELECTRICAL POWER BEFORE STARTING INSTALLATION OF LIGHT FIXTURE. DO NOT REMOVE INSULATION FROM FIXTURE.
2. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
3. CONNECT THE GROUND WIRE (BARE COPPER OR GREEN) FROM YOUR FIXTURE TO THE GROUND WIRE (BARE COPPER OR GREEN) OR GROUND SCREW IN THE ELECTRICAL OUTLET BOX.


INSTALLATION:

<p>STYLE#1</p> <p>Studs</p>	<p>Ground Wire Black White</p>	<p>4. Connect the ground wire (bare copper or green) from your fixture to the ground wire (bare copper or green) or ground screw in the electrical outlet box. Connect the black wire (or wire with marking) from the fixture to the black wire in the electrical box and connect the white wire from the fixture to the white wire in the electrical box.</p> <p>5. Tuck electrical wires into outlet box and position fixture over studs or nipple on mounting bracket assembly. Secure fixture in place with star washer(s) and cap nut(s).</p> <p>6. Mounting Glass to Fixture NOTE: Refer to the style of assembly that matches the style of your fixture.</p> <p>STYLE #1-Using thumb screws provided, attach the glass to the fixture head. Place the glass into the fixture head. Place the glass into the fixture head and tighten screws into the groove or holes in the glass.</p> <p>STYLE #2-Remove spinner nut from socket. Position glass on lamp and secure with spinner nut. On some fixtures, a tool is included to attach the spinner nut.</p> <p>STYLE #3-Squeeze the two clips together around the socket. Slide the glass over the clips, then push the glass up snug to the fixture head.</p> <p>7. If not already done, install proper bulb type and wattage (not included).</p>
<p>STYLE#2</p> <p>Loosen "B". Adjust stud to desired length and lock in place with "B".</p>	<p>Star Washer Cap Nut Stud</p>	<p>4. Connect the ground wire (bare copper or green) from your fixture to the ground wire (bare copper or green) or ground screw in the electrical outlet box. Connect the black wire (or wire with marking) from the fixture to the black wire in the electrical box and connect the white wire from the fixture to the white wire in the electrical box.</p> <p>5. Tuck electrical wires into outlet box and position fixture over studs or nipple on mounting bracket assembly. Secure fixture in place with star washer(s) and cap nut(s).</p> <p>6. Mounting Glass to Fixture NOTE: Refer to the style of assembly that matches the style of your fixture.</p> <p>STYLE #1-Using thumb screws provided, attach the glass to the fixture head. Place the glass into the fixture head. Place the glass into the fixture head and tighten screws into the groove or holes in the glass.</p> <p>STYLE #2-Remove spinner nut from socket. Position glass on lamp and secure with spinner nut. On some fixtures, a tool is included to attach the spinner nut.</p> <p>STYLE #3-Squeeze the two clips together around the socket. Slide the glass over the clips, then push the glass up snug to the fixture head.</p> <p>7. If not already done, install proper bulb type and wattage (not included).</p>
<p>STYLE#1</p> <p>Outlet Box Screws Grounding Wire Mounting Bracket</p>	<p>Ground Wire Black White</p>	<p>4. Connect the ground wire (bare copper or green) from your fixture to the ground wire (bare copper or green) or ground screw in the electrical outlet box. Connect the black wire (or wire with marking) from the fixture to the black wire in the electrical box and connect the white wire from the fixture to the white wire in the electrical box.</p> <p>5. Tuck electrical wires into outlet box and position fixture over studs or nipple on mounting bracket assembly. Secure fixture in place with star washer(s) and cap nut(s).</p> <p>6. Mounting Glass to Fixture NOTE: Refer to the style of assembly that matches the style of your fixture.</p> <p>STYLE #1-Using thumb screws provided, attach the glass to the fixture head. Place the glass into the fixture head. Place the glass into the fixture head and tighten screws into the groove or holes in the glass.</p> <p>STYLE #2-Remove spinner nut from socket. Position glass on lamp and secure with spinner nut. On some fixtures, a tool is included to attach the spinner nut.</p> <p>STYLE #3-Squeeze the two clips together around the socket. Slide the glass over the clips, then push the glass up snug to the fixture head.</p> <p>7. If not already done, install proper bulb type and wattage (not included).</p>
<p>STYLE#1</p> <p>Outlet Box Screws Grounding Wire Mounting Bracket</p>	<p>Ground Wire Black White</p>	<p>4. Connect the ground wire (bare copper or green) from your fixture to the ground wire (bare copper or green) or ground screw in the electrical outlet box. Connect the black wire (or wire with marking) from the fixture to the black wire in the electrical box and connect the white wire from the fixture to the white wire in the electrical box.</p> <p>5. Tuck electrical wires into outlet box and position fixture over studs or nipple on mounting bracket assembly. Secure fixture in place with star washer(s) and cap nut(s).</p> <p>6. Mounting Glass to Fixture NOTE: Refer to the style of assembly that matches the style of your fixture.</p> <p>STYLE #1-Using thumb screws provided, attach the glass to the fixture head. Place the glass into the fixture head. Place the glass into the fixture head and tighten screws into the groove or holes in the glass.</p> <p>STYLE #2-Remove spinner nut from socket. Position glass on lamp and secure with spinner nut. On some fixtures, a tool is included to attach the spinner nut.</p> <p>STYLE #3-Squeeze the two clips together around the socket. Slide the glass over the clips, then push the glass up snug to the fixture head.</p> <p>7. If not already done, install proper bulb type and wattage (not included).</p>
<p>STYLE#2</p> <p>Outlet Box Screws Grounding Wire Mounting Bracket</p>	<p>Ground Wire Black White</p>	<p>4. Connect the ground wire (bare copper or green) from your fixture to the ground wire (bare copper or green) or ground screw in the electrical outlet box. Connect the black wire (or wire with marking) from the fixture to the black wire in the electrical box and connect the white wire from the fixture to the white wire in the electrical box.</p> <p>5. Tuck electrical wires into outlet box and position fixture over studs or nipple on mounting bracket assembly. Secure fixture in place with star washer(s) and cap nut(s).</p> <p>6. Mounting Glass to Fixture NOTE: Refer to the style of assembly that matches the style of your fixture.</p> <p>STYLE #1-Using thumb screws provided, attach the glass to the fixture head. Place the glass into the fixture head. Place the glass into the fixture head and tighten screws into the groove or holes in the glass.</p> <p>STYLE #2-Remove spinner nut from socket. Position glass on lamp and secure with spinner nut. On some fixtures, a tool is included to attach the spinner nut.</p> <p>STYLE #3-Squeeze the two clips together around the socket. Slide the glass over the clips, then push the glass up snug to the fixture head.</p> <p>7. If not already done, install proper bulb type and wattage (not included).</p>

INSTALLATION

1. SPREAD THE ARMS [B] VIA SCREWDRIVER [C], AND TIGHTEN AFTER SPREADING.
2. SCREW THE RODS [D] AND CANOPY [E] TO THE FIXTURE [A].
3. ATTACH THE MOUNTING BAR [F] TO THE OUTLET BOX USING OUTLET BOX SCREWS [G].
4. PLACE THE CANOPY [E] ONTO THE MOUNTING BAR [F], THEN SCREW WITH DECORATIVE NUT [J].
5. INSTALL BULB.

LL-P-235

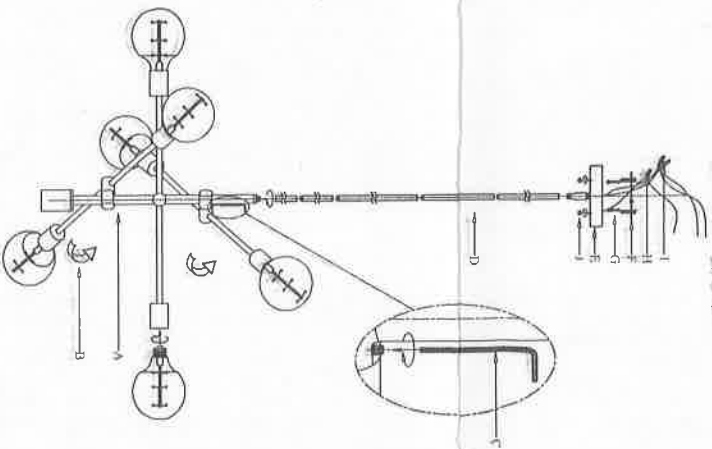

CAUTION: PULL ANY EXCESS WIRE THROUGH BOTTOM OF THE LAMP. PLEASE USE TYPE A BULB. DO NOT USE LIGHT BULB RATED GREATER THAN 60 WATTS OR 4 WATT LED BULB. OR THE LAMP MAY BURN AND CAUSE A FIRE! TO CLEAN, USE A SOFT CLOTH ONLY.

NOTE: TURN THE POWER OFF (UNPLUG FROM THE WALL OUTLET) BEFORE REPLACING THE BULB. MAKE SURE THE BULB HAS SUFFICIENT TIME TO COOL DOWN. DO NOT SUBJECT THE LAMP TO ANY SHOCK WHILE LIT AS SHATTERING OF LAMP MAY RESULT.