

DUSK PATH

Specifications

Voltage:	12V DC	Lumen (±5%):	Warm White 3000K - 330lm Neutral White 4000K - 350lm White 5000K - 330lm	Dimmable:	No
Power:	4W	Beam Angle:	90°	IP Rating:	IP65
CCT:	3000K-4000K-5000K	CRI:	≥90	Lifespan:	50,000hrs

Requires: 12V DC Constant Voltage LED Driver (Wire in Parallel)

Save these instructions

Warning - To reduce the risk of fire or injury to persons:


- Turn power off or unplug the luminaire and allow it to cool before replacing the lamp
- Lamp gets hot quickly. Contact only switch/plug when turning on.
- Do not touch the hot lens, guard or luminaire housing until it has cooled
- Keep Lamp away from combustibles.
- Do not touch lamp. Use a soft cloth. Oil from skin may damage lamp.
- Do not operate the luminaire fitting with a missing or damaged shield.

Important Safety Instructions

- 12 Volt Fixture
- For outdoor use only
- Make sure the power is turned off before installing or servicing the luminaire.
- WARNING: Risk of electrical shock. Install all luminaires 3.05m or more from a pool, spa or fountain.
- Position the wire and wire connector so that it is connected within 15.2 cm from a building or structure, a luminaire or fitting.
- Not to be buried except for a maximum of 15.2 cm to connect the main low voltage cable.

Lamp Installation/Replacement Instructions

- Unscrew the clear section of the head from the metal base (see drawing below).
- Screw the post into the base of the head, Insert the G4/G5.3 LED lamp with correct wattage as marked on the fixture label.
- Re-assembly the head by rescrewing the clear section into the metal base.

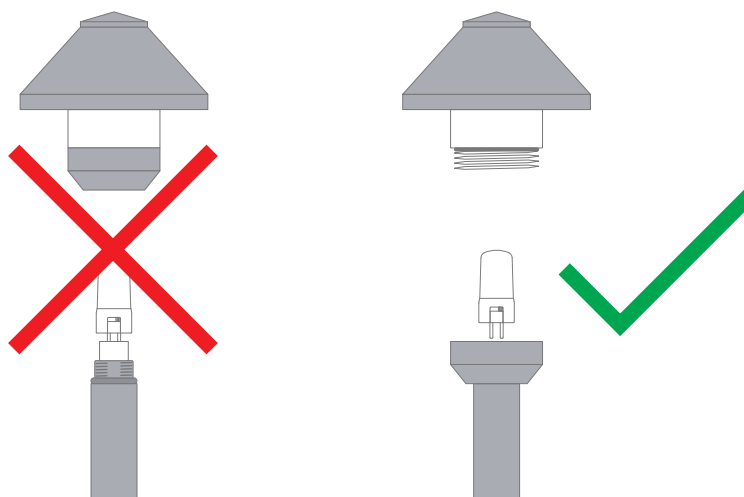


Note: -The lamp must be installed by professional electrician
-Ensure the power supply is switched off before fitting this product

-Do not touch the lamp when in use
-Keep away from hot steam and corrosive gas

Fixture Mounting Instructions

- Disconnect the transformer from main power supply
- Attach the top of the lens assembly to the path light top by threading the small hole on the lens assembly with the top screw and rotating the lens clockwise to the top.
- Insert G4/G5.3 LED (10W max) bi-pin lamp with the correct wattage as marked on fixture label into socket located at top of stem.
- Attach the bottom of the lens assembly to the post.
- Run pigtail wire from the fixture through the ground stake mounting hole.
- Insert composite ground stake in desired location until flange of stake is flush to grade.
- Screw stem into top of stake and tighten until snug
- Strip the two fixture pigtail wires and connect them to the main low voltage supply cable lead with wire connectors.

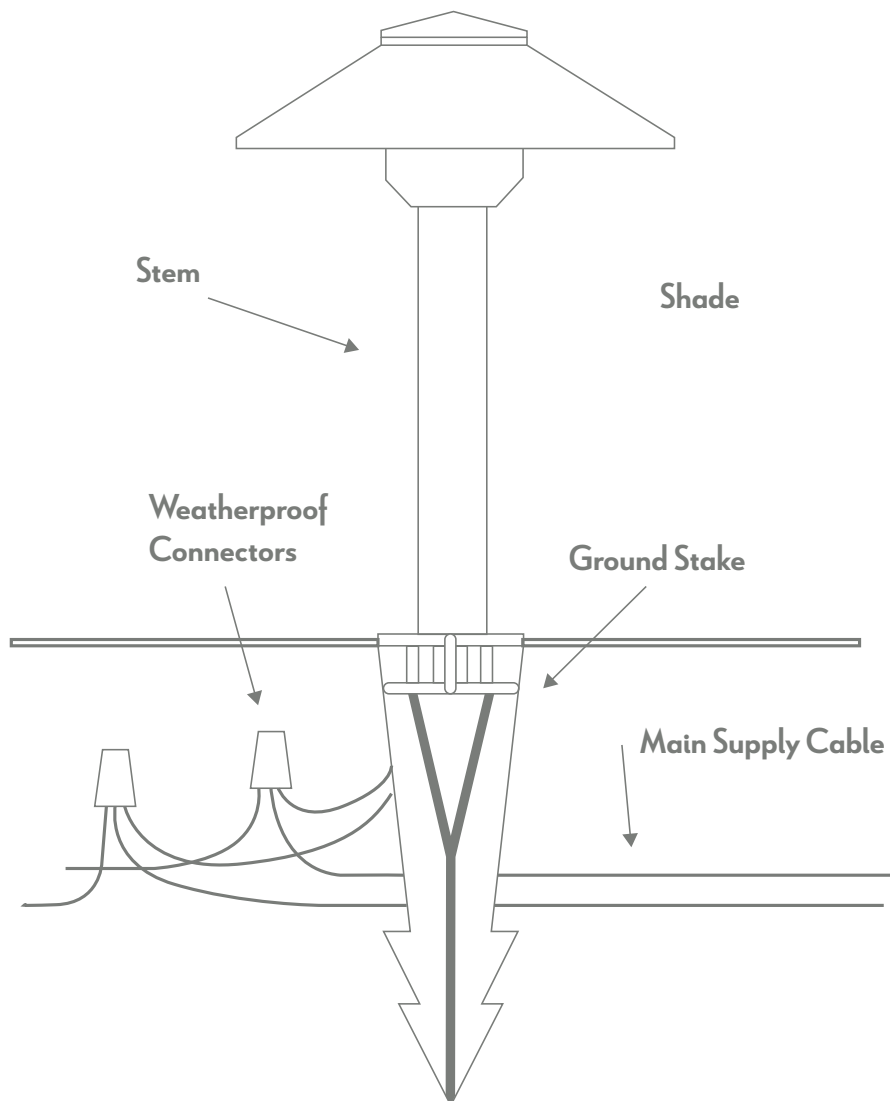

Note: -The lamp must be installed by professional electrician
-Ensure the power supply is switched off before fitting this product

-Do not touch the lamp when in use
-Keep away from hot steam and corrosive gas