

sunlite®

INSTALLATION INSTRUCTIONS

LED FLUSHMOUNT SCT DISC CEILING FIXTURES

Please read and understand this entire manual before attempting to assemble, operate or install the product.



WARNING: Avoid fire or electric shock. Follow installation instructions carefully. If unsure about electrical installation, consult a qualified electrician. Wear rubber-soled shoes and work on a sturdy wooden ladder. Ground fixture to avoid potential electric shock. Handle metal parts carefully to prevent cuts. To avoid a hazard to children, account for all parts and destroy all packing materials. Operating temperature -20°C – 45°C (-4°F – 113 °F). This product is suitable for wet locations.



CAUTION: Turn off power at fuse or circuit breaker box before installation and maintenance. Fixture must be installed according to National Electric Code and local building codes. If you are unsure about wiring, consult a qualified electrician. THIS FIXTURE BODY IS ONE PIECE, DO NOT DISASSEMBLE OR MAKE ALTERATIONS.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including that may cause undesired operation.

*The fixture may not be compatible with all dimmers. Go to www.Sunlite.com/Dimmers to find dimmer compatibility information.

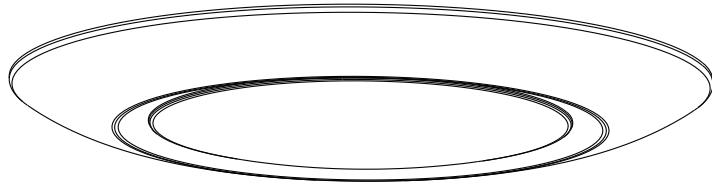

DIMMABLE*

Includes:

- 2 x Mounting Screws
- 3 x Wire Nuts

Sunlite's CCT tunable round LED disc fixture allows for selecting the light temperature to match a wide range of applications.

The CCT tunable selector switch contained within the fixture, allows the user to choose between 3000K, 4000K, and 5000K prior to installation.

WARNING! BEFORE PROCEEDING, PLEASE ENSURE POWER HAS BEEN SWITCHED OFF.

1. Install two screws into junction box (fig. 1)
2. Twist diffuser lens counter clockwise to remove. (fig. 2)
3. Connect the fixture black wire to the black supply wire, white fixture wire to the white supply wire, and fixture ground wire to the supply ground wire using wire nuts. Wrap all wire connections with electrical tape to ensure secure connection. (fig. 3)
4. Select color temperature on attached selector on back of fixture. (fig. 4)
5. Carefully tuck all wires back into the junction box. Install fixture on junction box screws and rotate until it locks. Tighten screws to secure.
6. Twist diffuser lens back on, clockwise.

